

# **Introduction to Parallel FEM in C**

## **Parallel Data Structure**

Kengo Nakajima  
Information Technology Center

Programming for Parallel Computing (616-2057)  
Seminar on Advanced Computing (616-4009)

# Parallel Computing


- Faster, Larger & More Complicated
- Scalability
  - Solving  $N^x$  scale problem using  $N^x$  computational resources during same computation time
    - for large-scale problems: Weak Scaling
    - e.g. CG solver: more iterations needed for larger problems
  - Solving a problem using  $N^x$  computational resources during  $1/N$  computation time
    - for faster computation: Strong Scaling

# What is Parallel Computing ? (1/2)


- to solve larger problems faster

## Homogeneous/Heterogeneous Porous Media

Lawrence Livermore National Laboratory

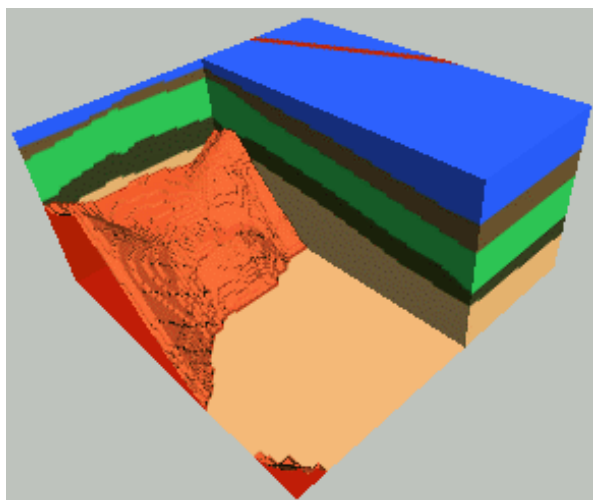

Homogeneous

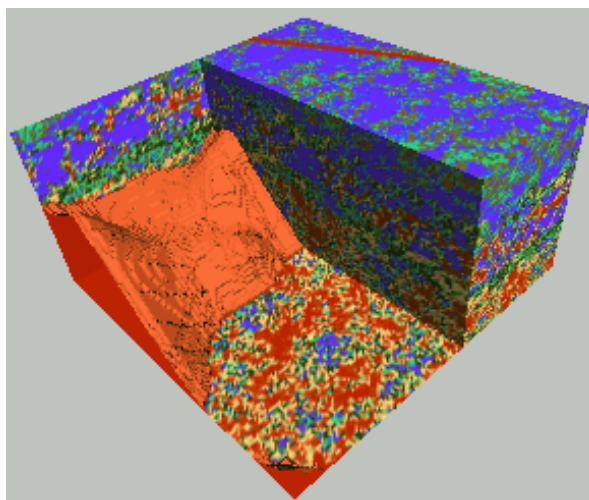


Heterogeneous

**very fine meshes are required for simulations of heterogeneous field.**

# What is Parallel Computing ? (2/2)

- PC with 1GB memory : 1M meshes are the limit for FEM
  - Southwest Japan with 1,000km x 1,000km x 100km in 1km mesh  
->  $10^8$  meshes
- Large Data -> Domain Decomposition -> Local Operation
- Inter-Domain Communication for Global Operation

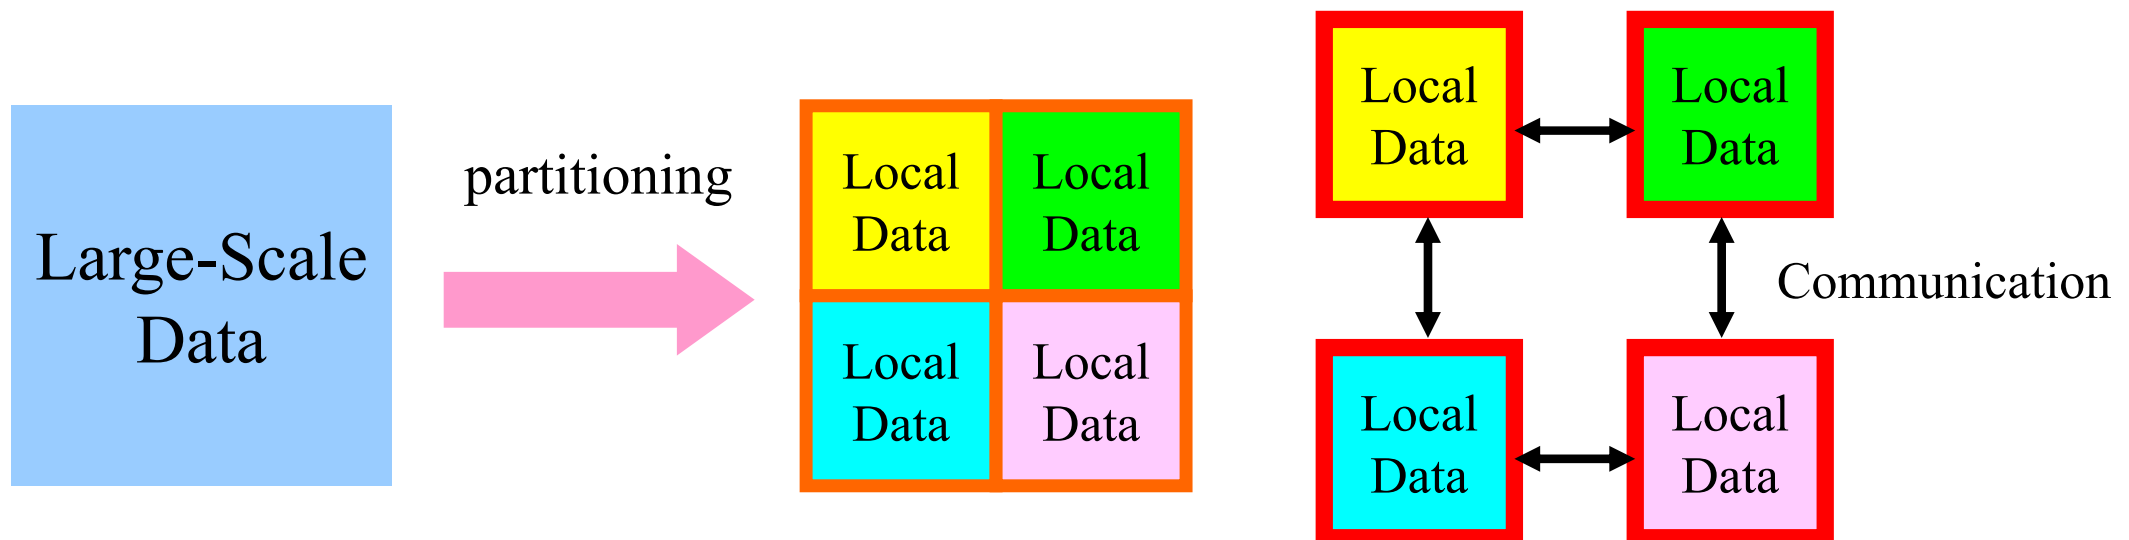

# What is Communication ?

- Parallel Computing -> Local Operations
- Communications are required in Global Operations for Consistency.


# Operations in Parallel FEM

## SPMD: Single-Program Multiple-Data

Large Scale Data -> partitioned into Distributed Local Data Sets.


FEM code can assemble coefficient matrix for each local data set :  
this part could be completely local, same as serial operations

Global Operations & Communications happen only in Linear Solvers  
dot products, matrix-vector multiply, preconditioning

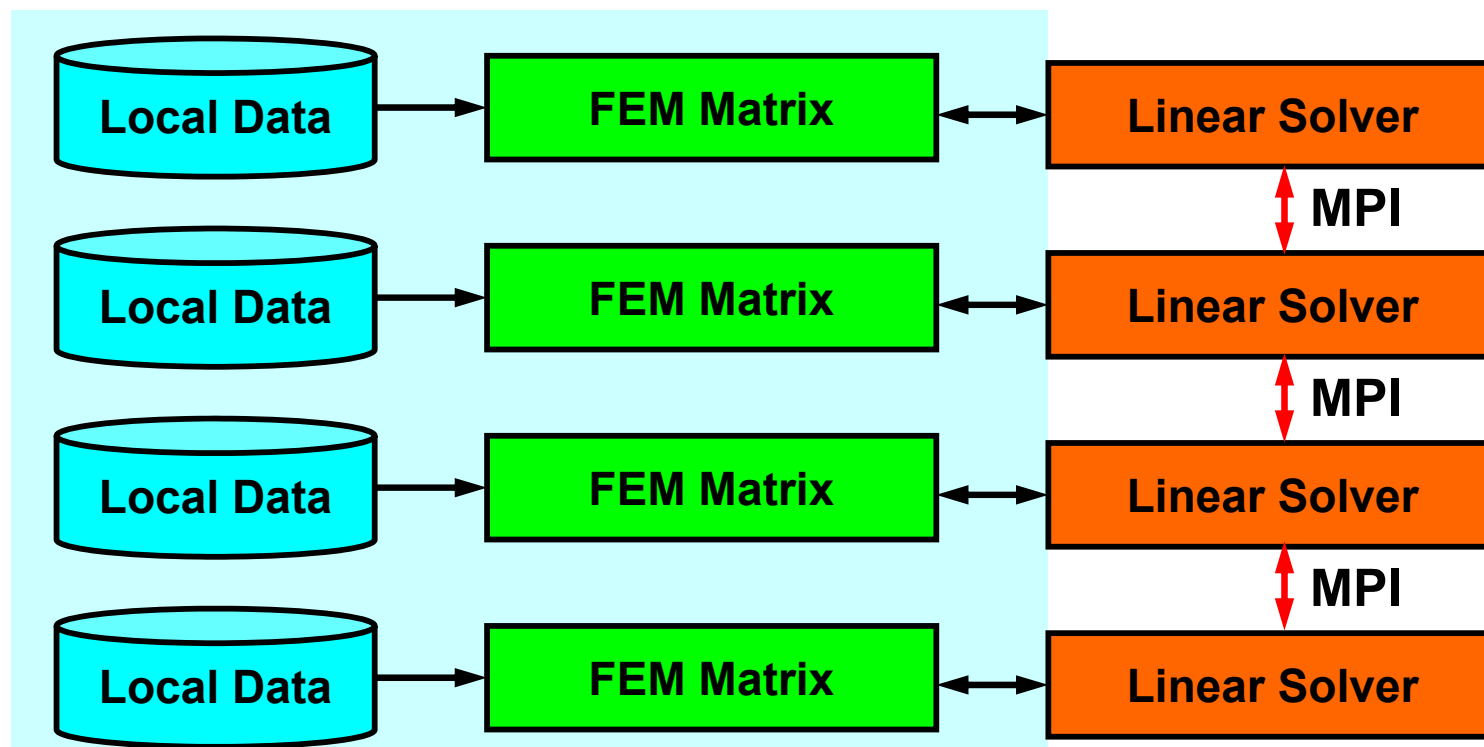


# Parallel FEM Procedures

- Design on “Local Data Structure” is important
  - for SPMD-type operations in the previous page
- Matrix Generation
- Preconditioned Iterative Solvers for Linear Equations



# Bi-Linear Square Elements





Values are defined on each node

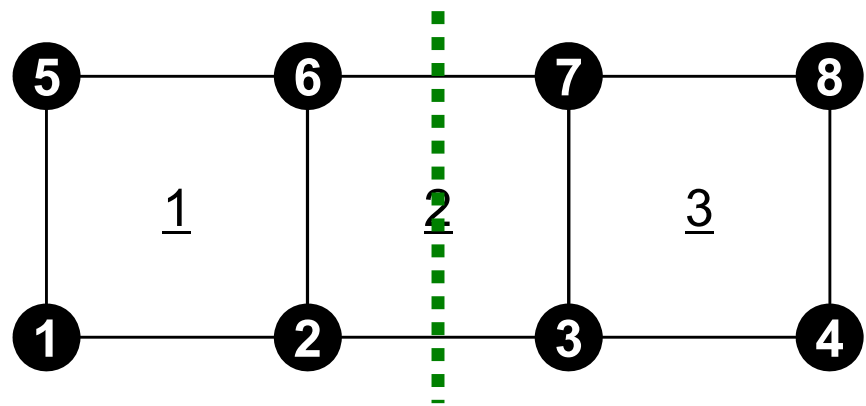


divide into two domains by “node-based” manner, where number of “nodes (vertices)” are balanced.

Local information is not enough for matrix assembling.

Information of overlapped elements and connected nodes are required for matrix assembling on boundary nodes.

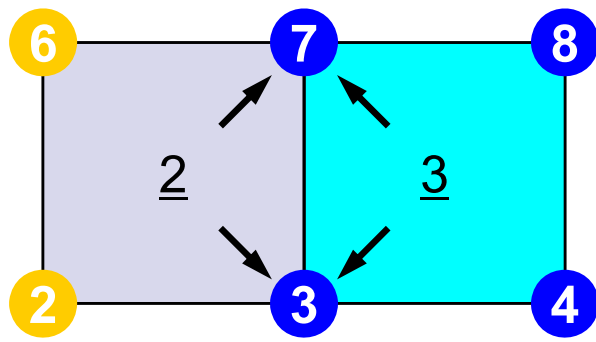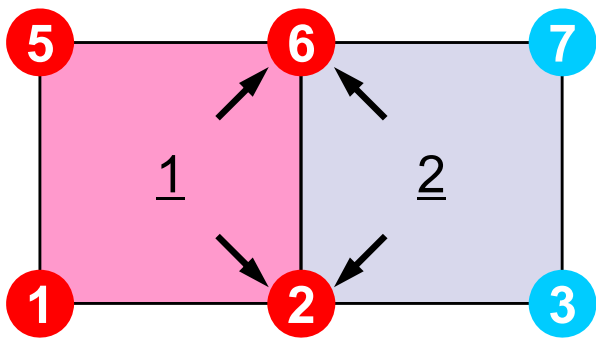






# Local Data of Parallel FEM

- **Node-based partitioning for IC/ILU type preconditioning methods**
- Local data includes information for :
  - Nodes originally assigned to the partition/PE
  - Elements which include the nodes : Element-based operations (Matrix Assemble) are allowed for fluid/structure subsystems.
  - All nodes which form the elements but out of the partition
- Nodes are classified into the following 3 categories from the viewpoint of the message passing
  - **Internal nodes** originally assigned nodes
  - **External nodes** in the overlapped elements but out of the partition
  - **Boundary nodes** *external nodes* of other partition
- Communication table between partitions
- NO global information required except partition-to-partition connectivity

# Node-based Partitioning

internal nodes - elements - external nodes



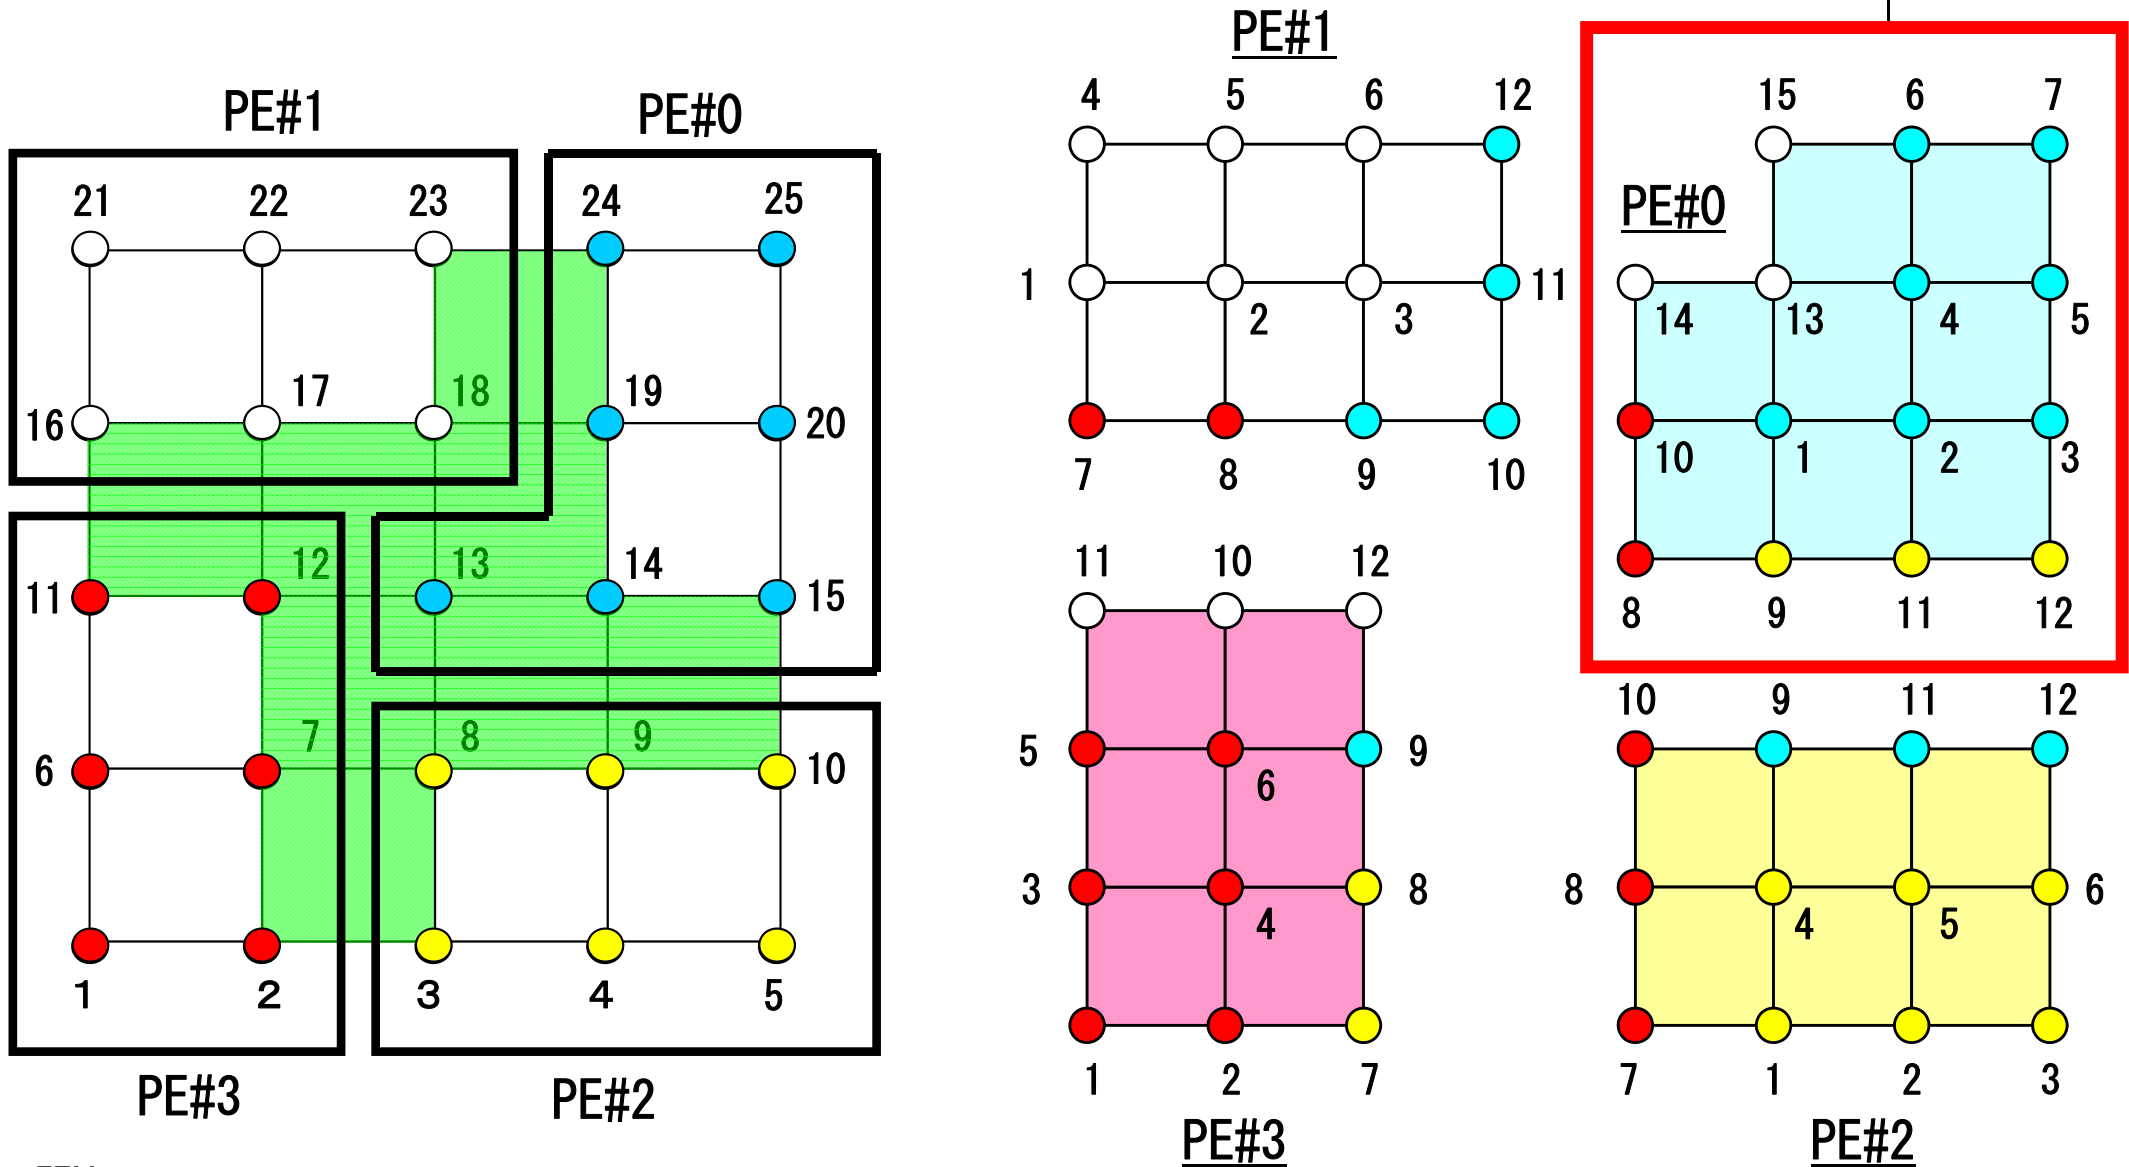


# Node-based Partitioning

internal nodes - elements - external nodes






- Partitioned nodes themselves (Internal Nodes) 内点
- Elements which include Internal Nodes 内点を含む要素
- External Nodes included in the Elements 外点  
in overlapped region among partitions.
- Info of External Nodes are required for completely local element-based operations on each processor.

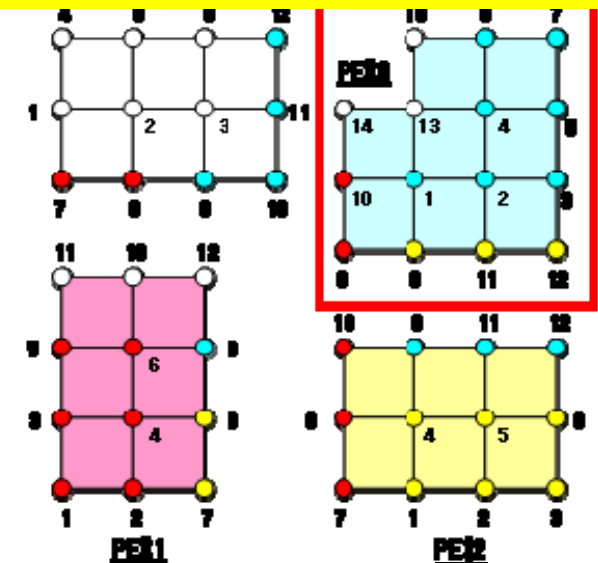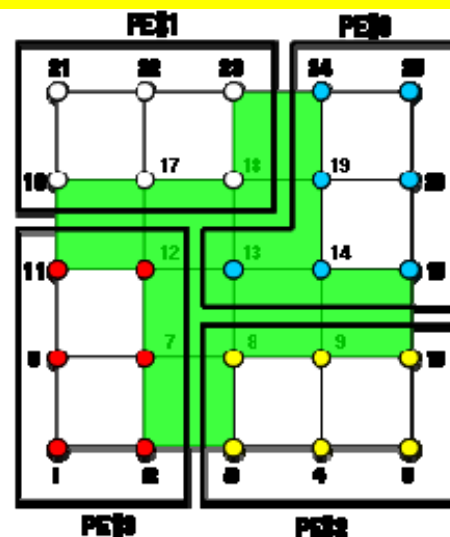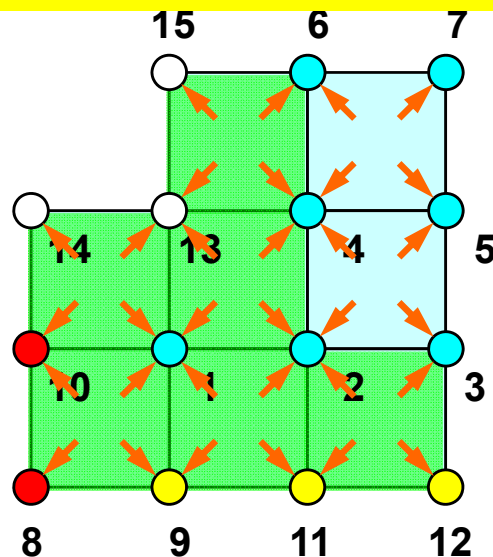


# We do not need communication during matrix assemble !!

- Partitioned nodes themselves (Internal Nodes)
- Elements which include Internal Nodes
- External Nodes included in the Elements in overlapped region among partitions.
- Info of External Nodes are required for completely local element-based operations on each processor.

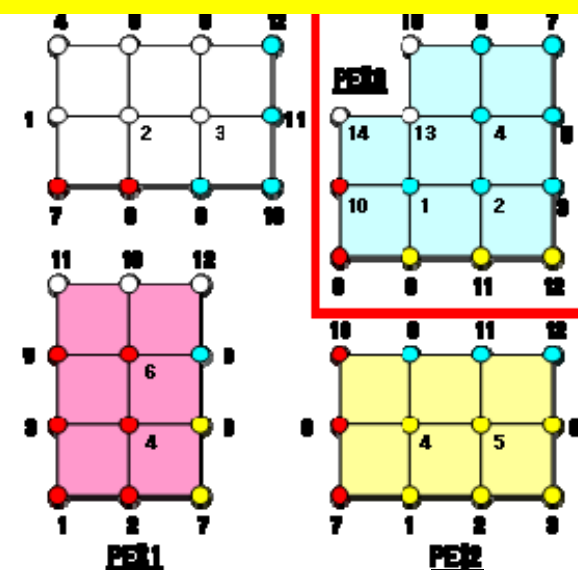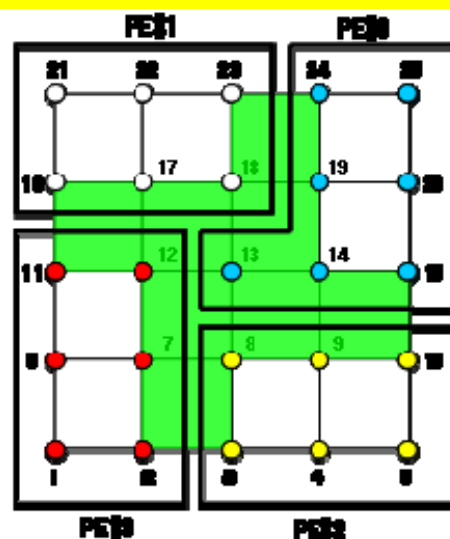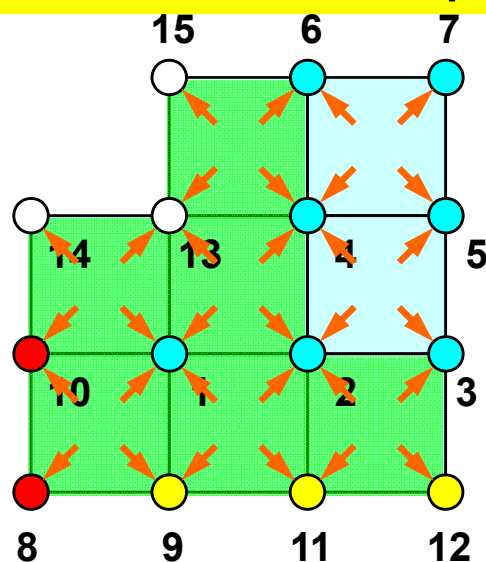



# Parallel Computing in FEM

## SPMD: Single-Program Multiple-Data

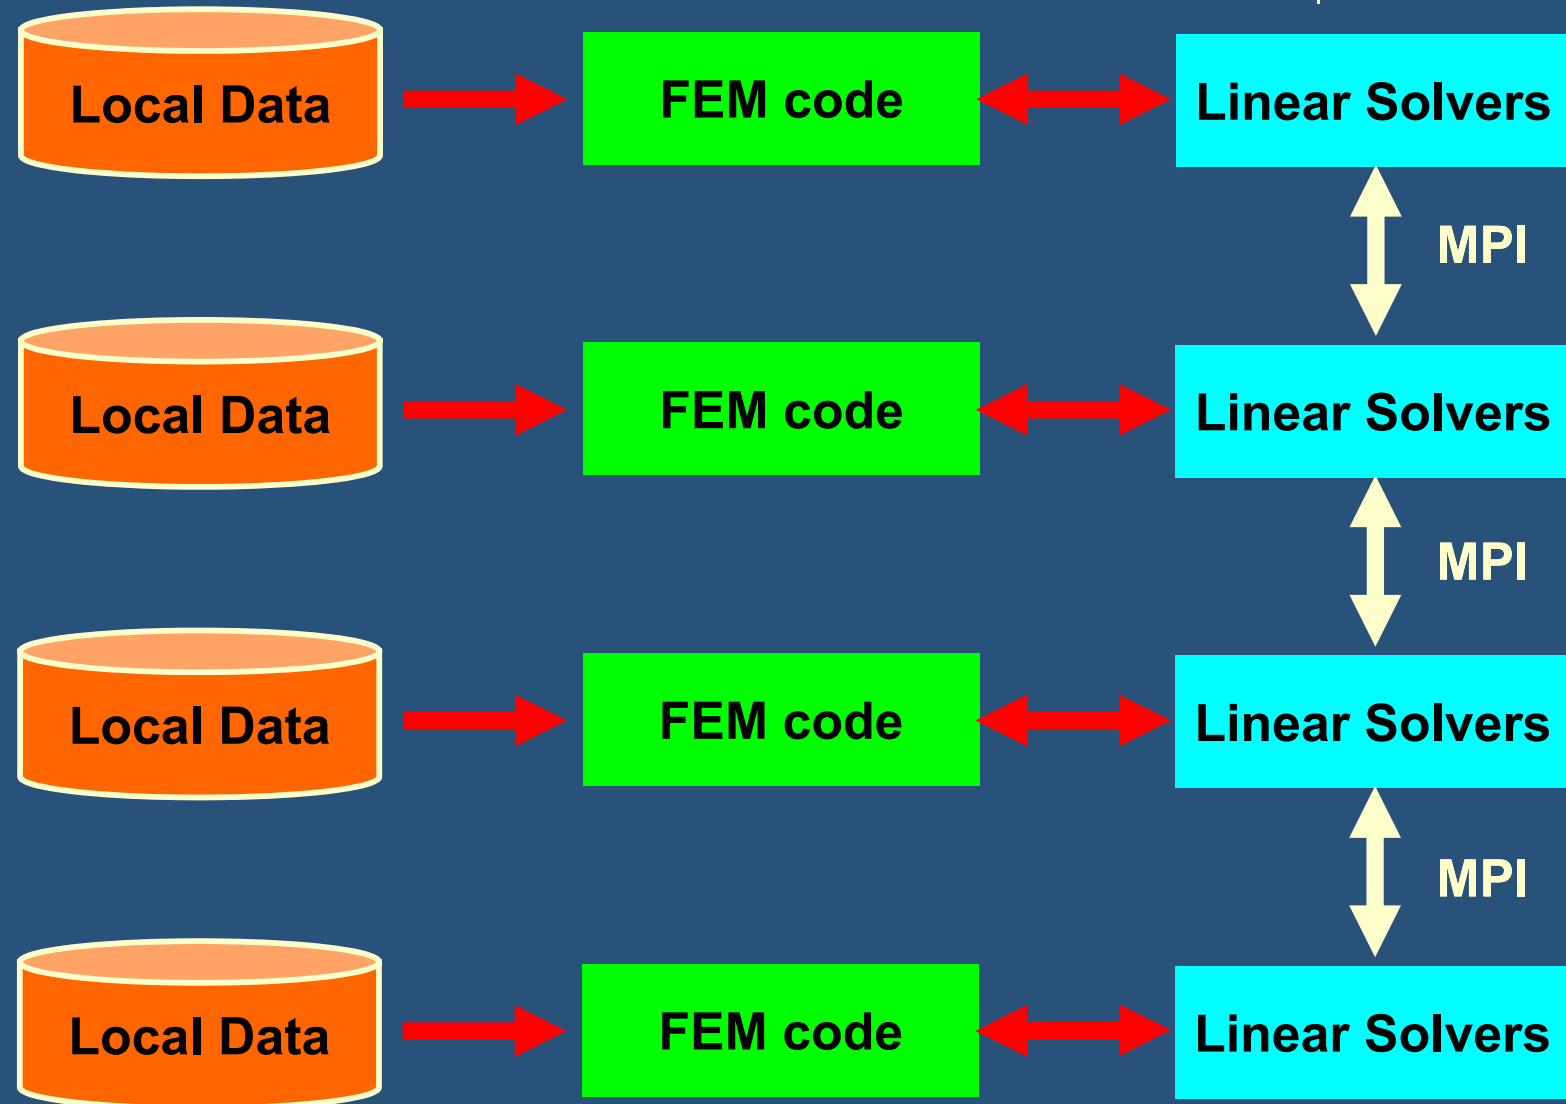


# Parallel Computing in FEM

## SPMD: Single-Program Multiple-Data

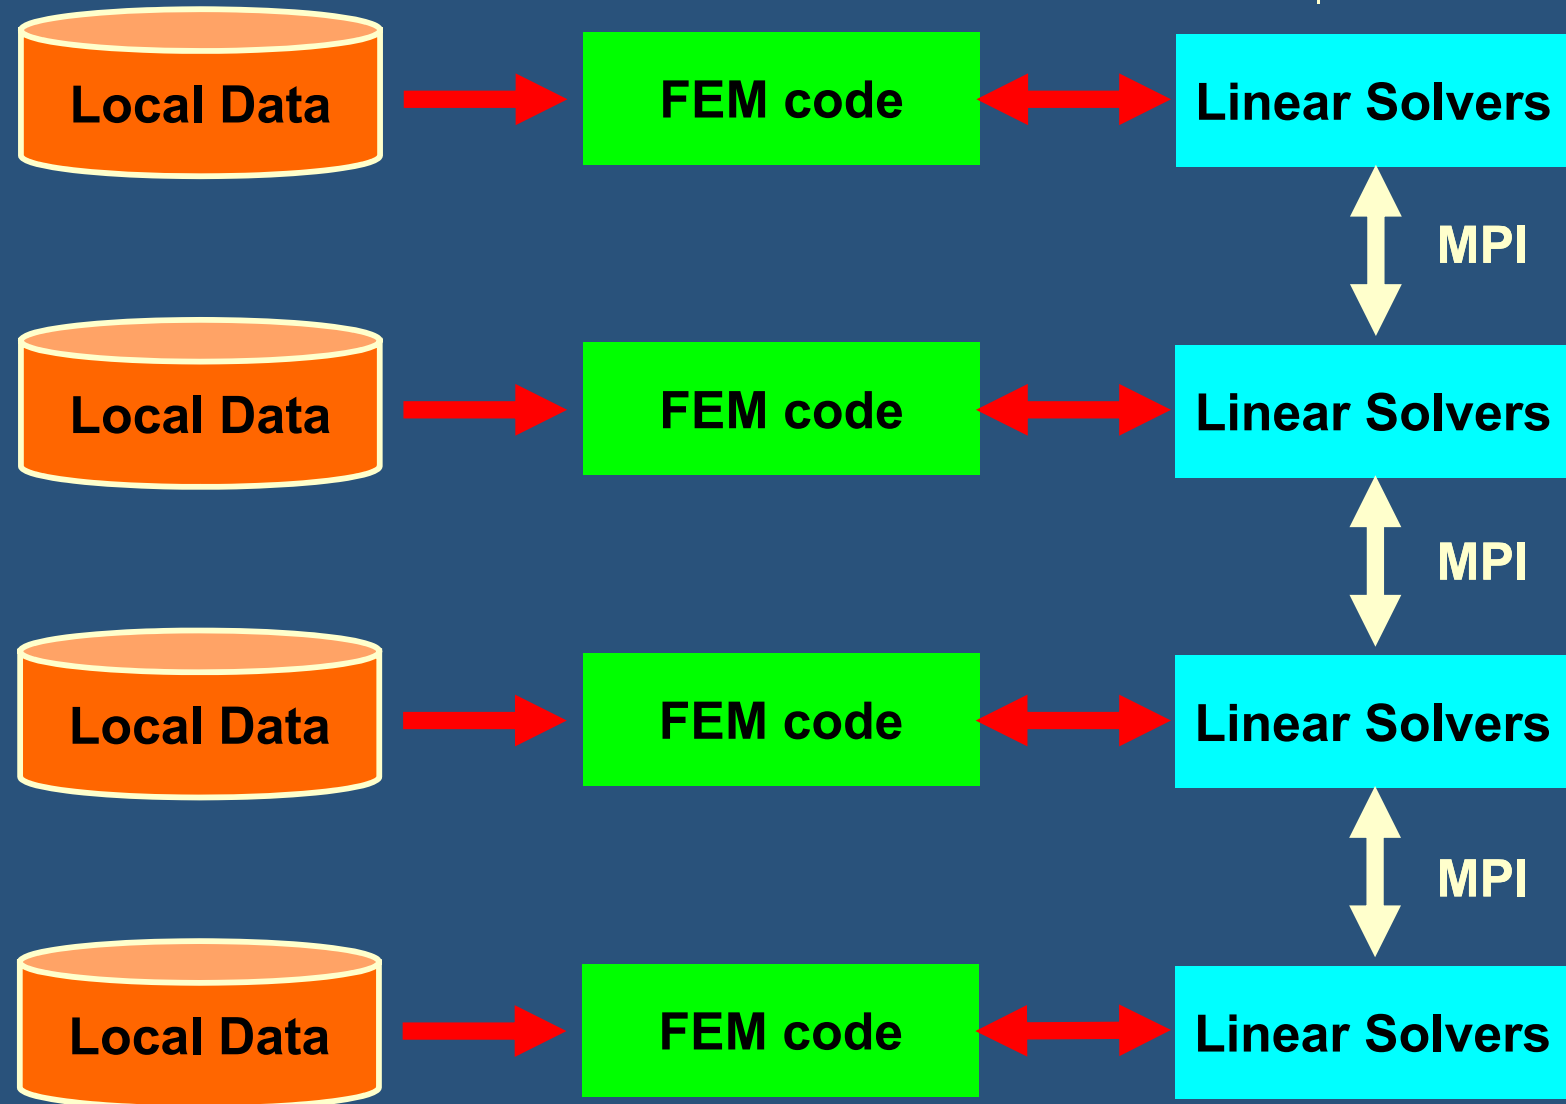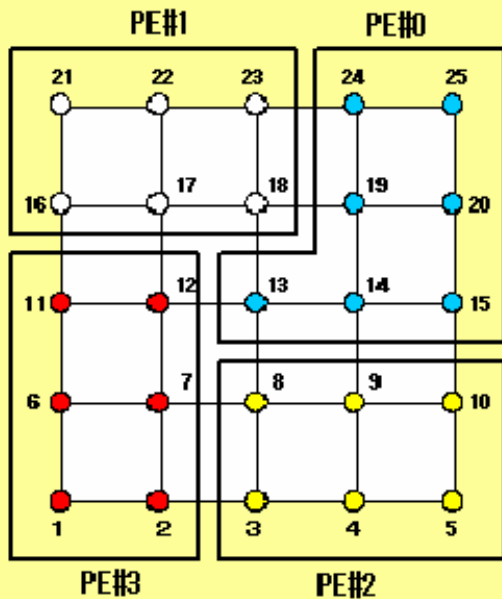


# Parallel Computing in FEM

## SPMD: Single-Program Multiple-Data

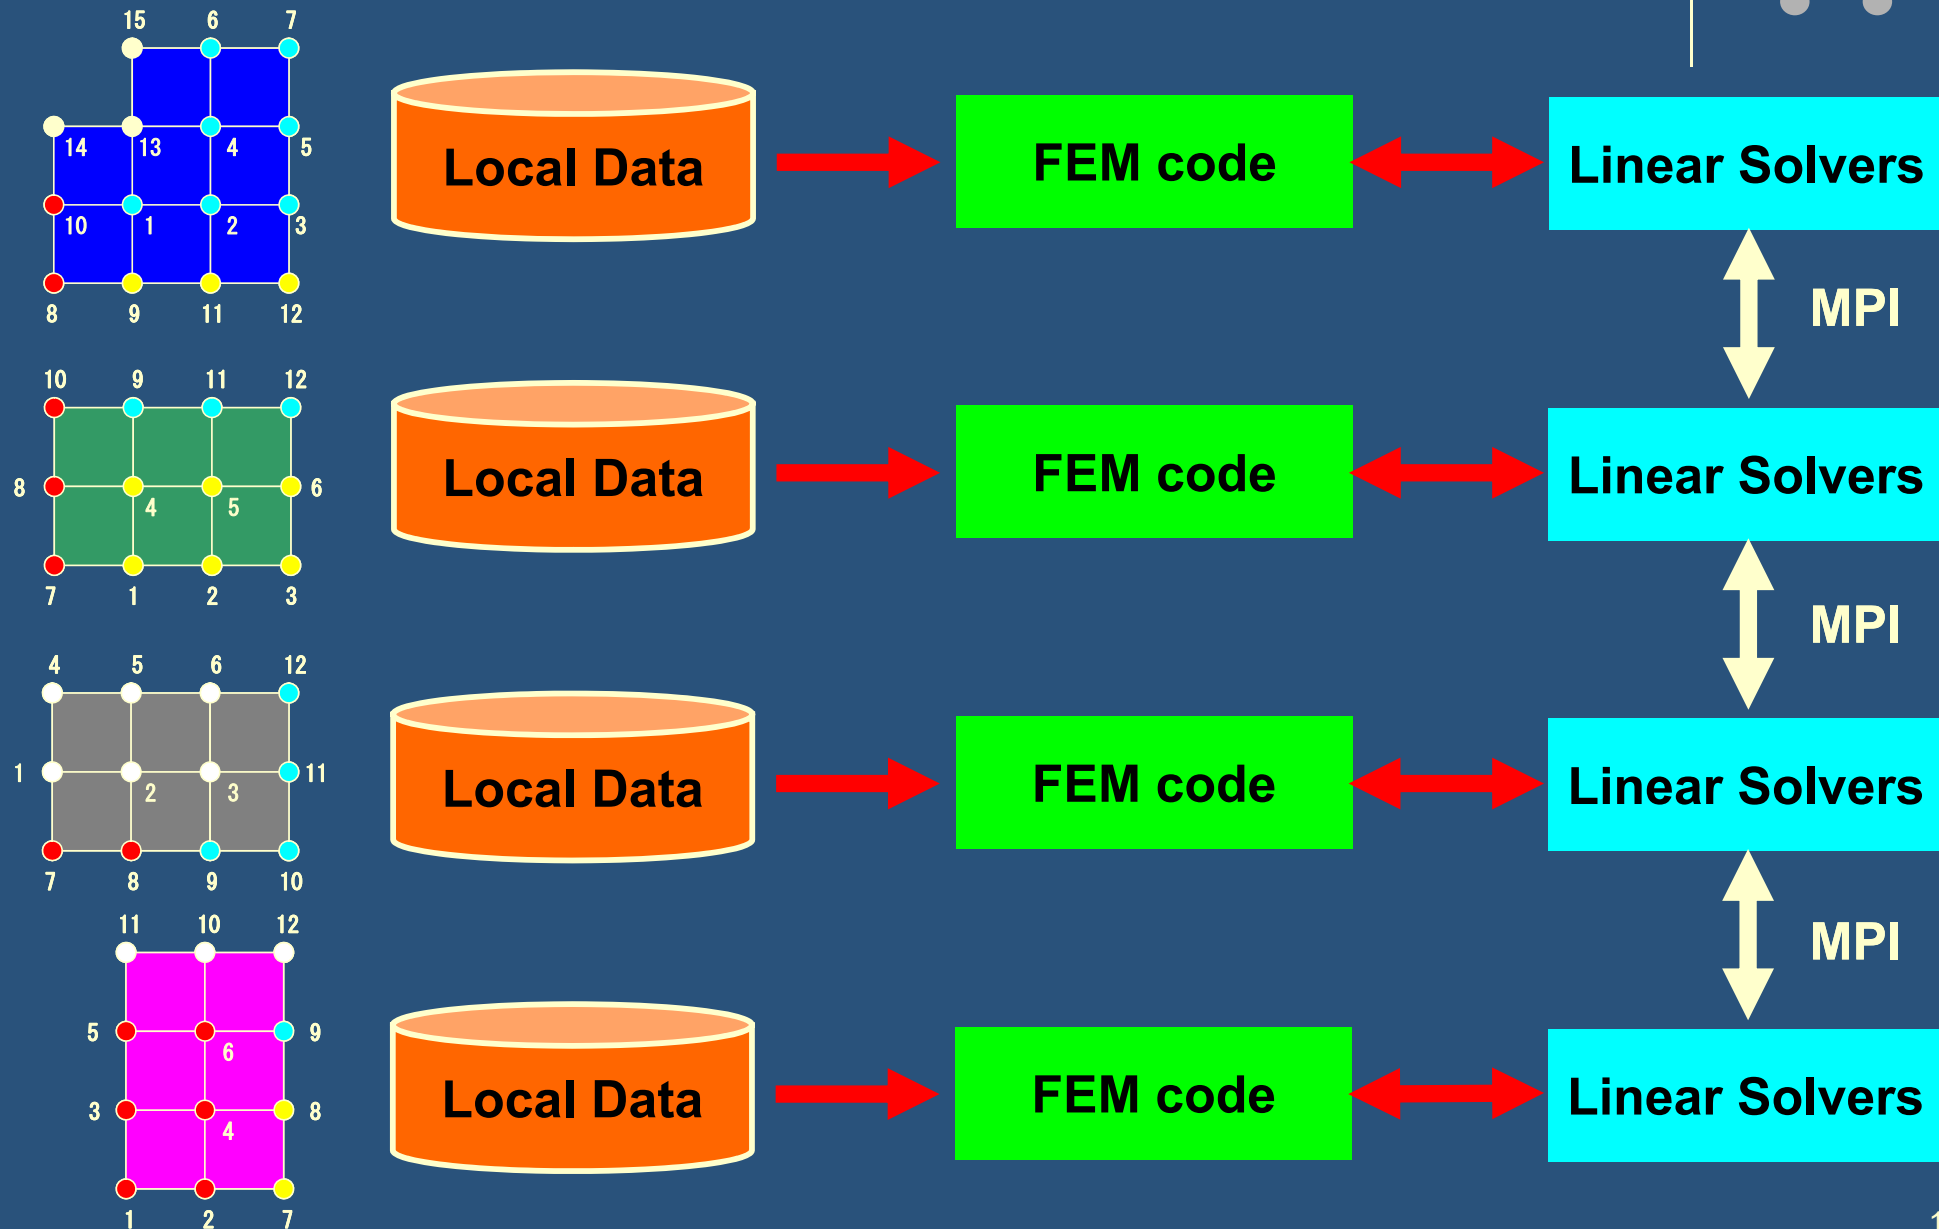

# Parallel Computing in FEM


## SPMD: Single-Program Multiple-Data

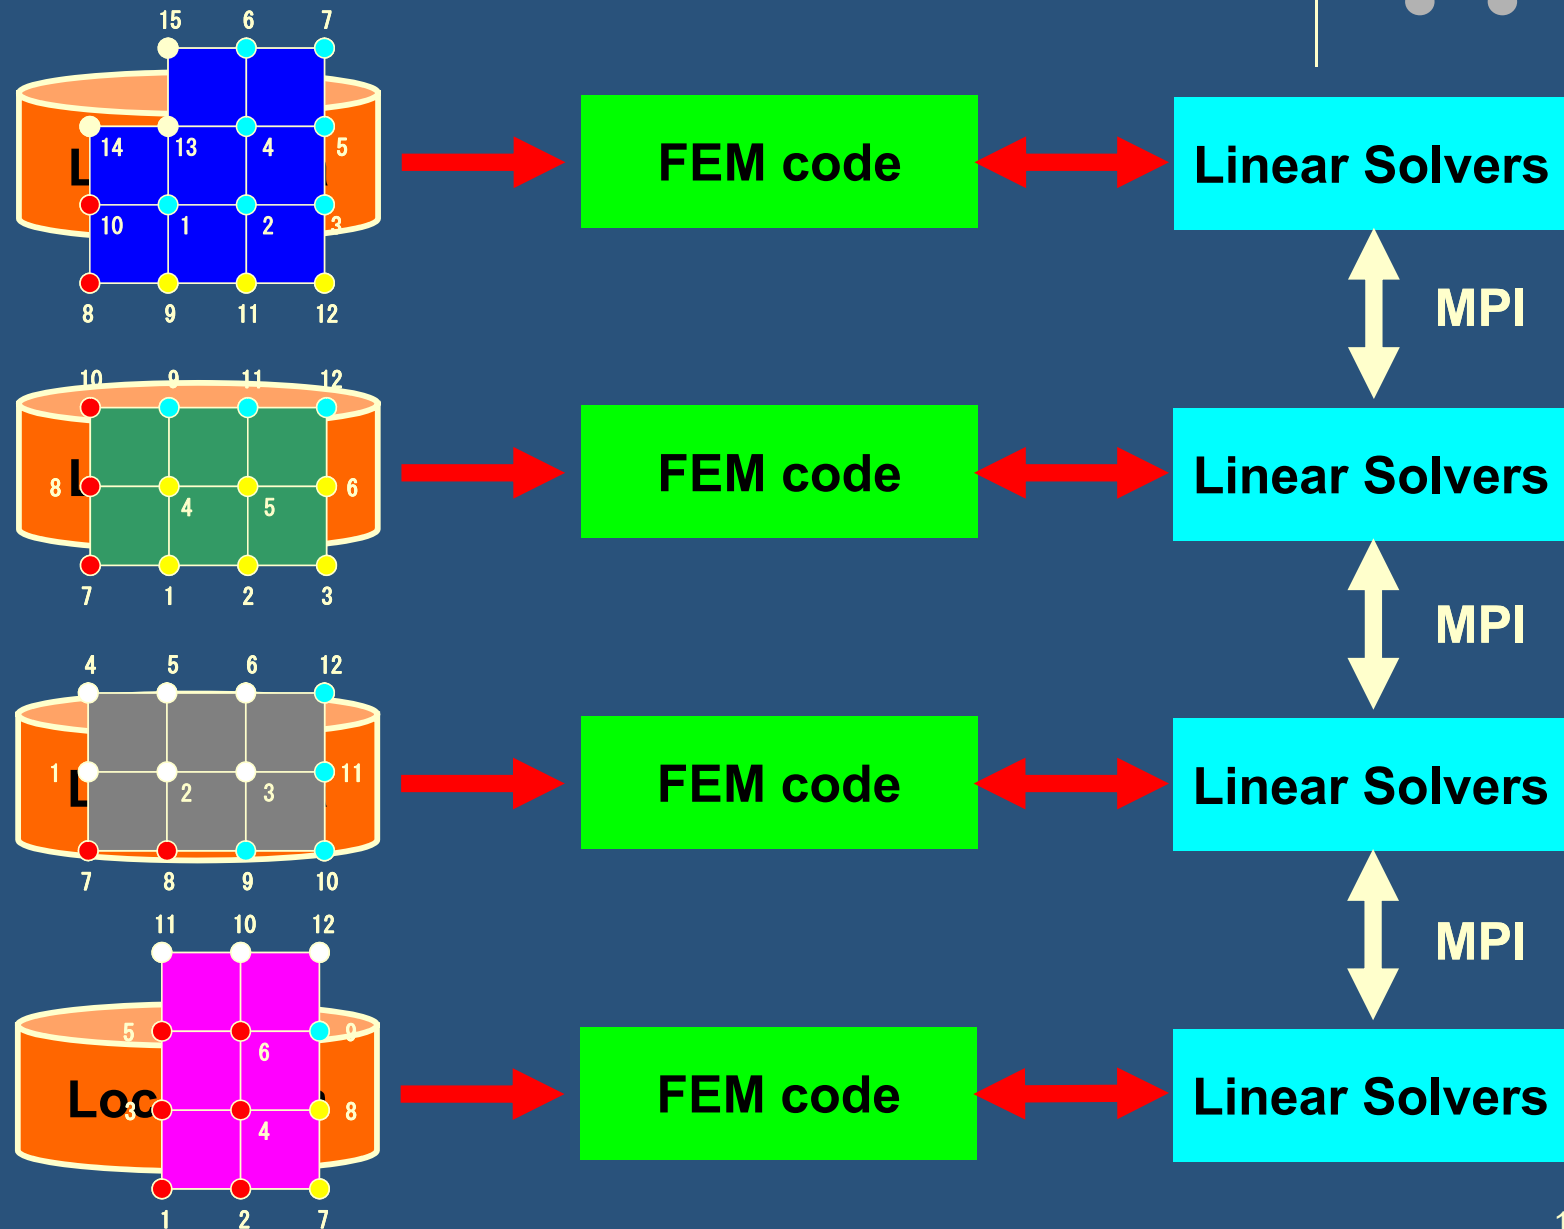




# Parallel Computing in FEM

## SPMD: Single-Program Multiple-Data

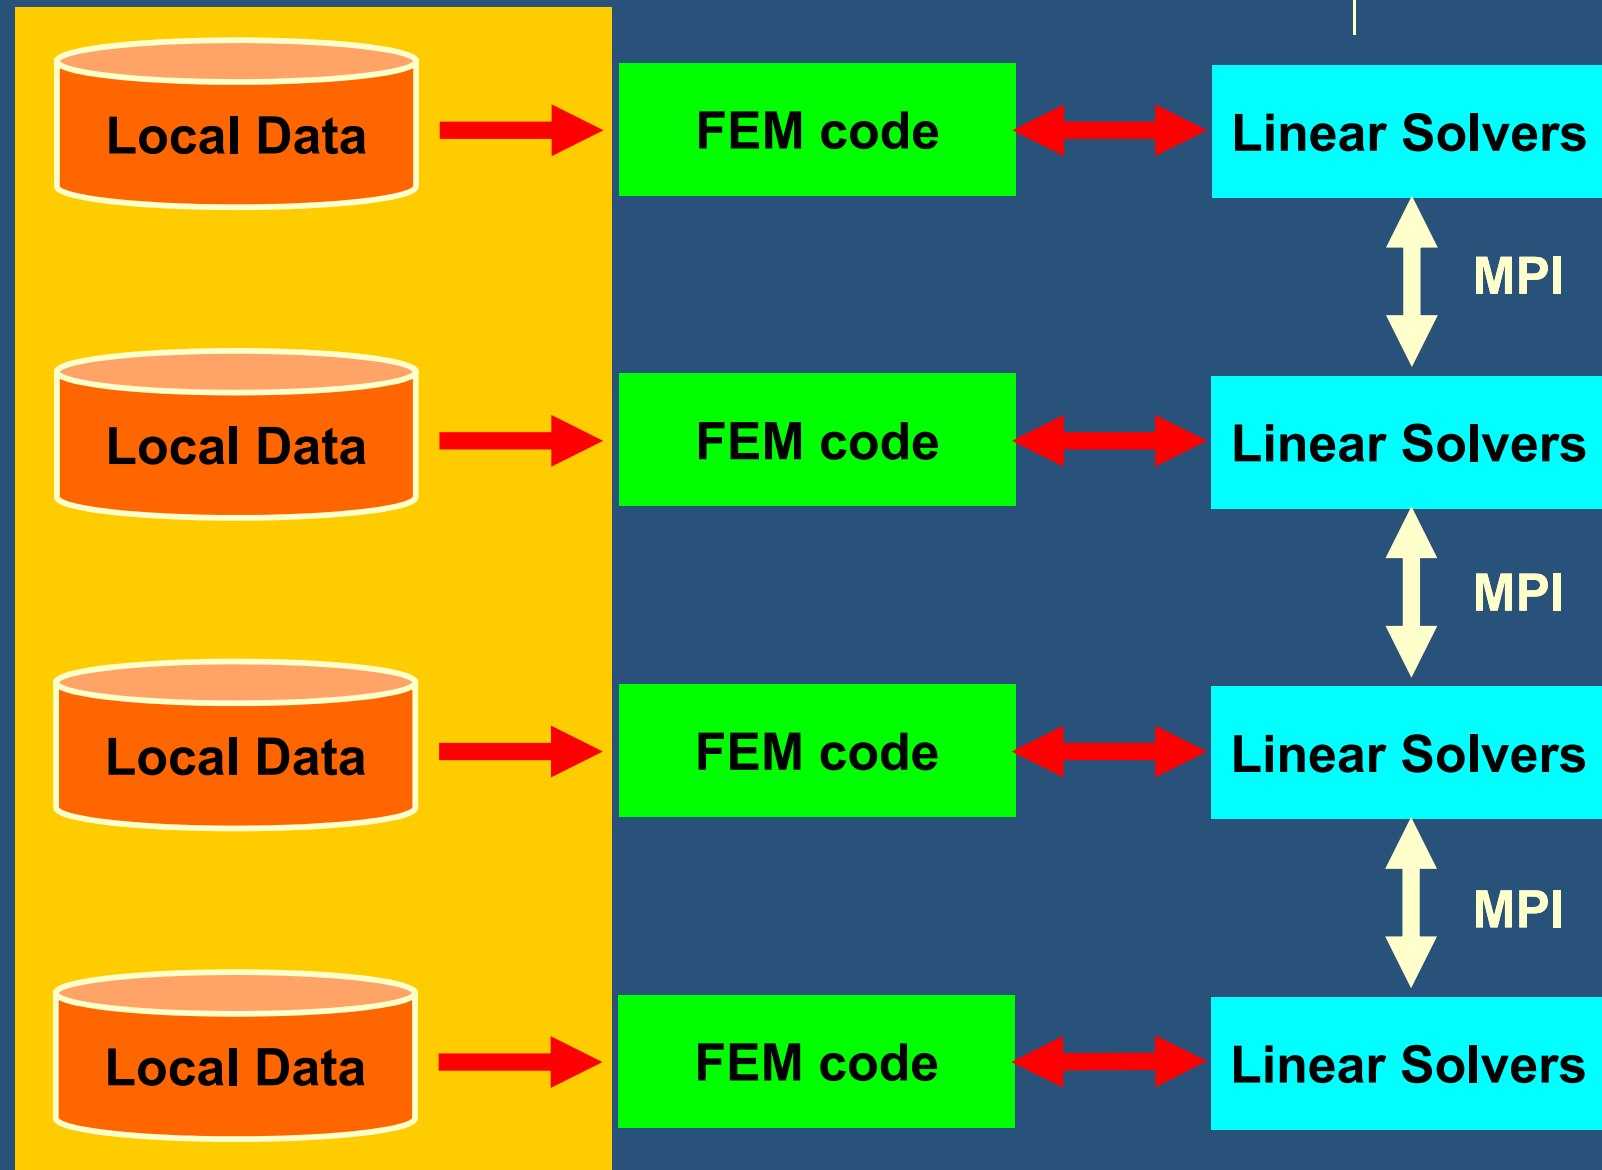


# What is Communications ?




- to get information of “external nodes” from external partitions (local data)
- “Communication tables” contain the information


# 1D FEM: 12 nodes/11 elem's/3 domains

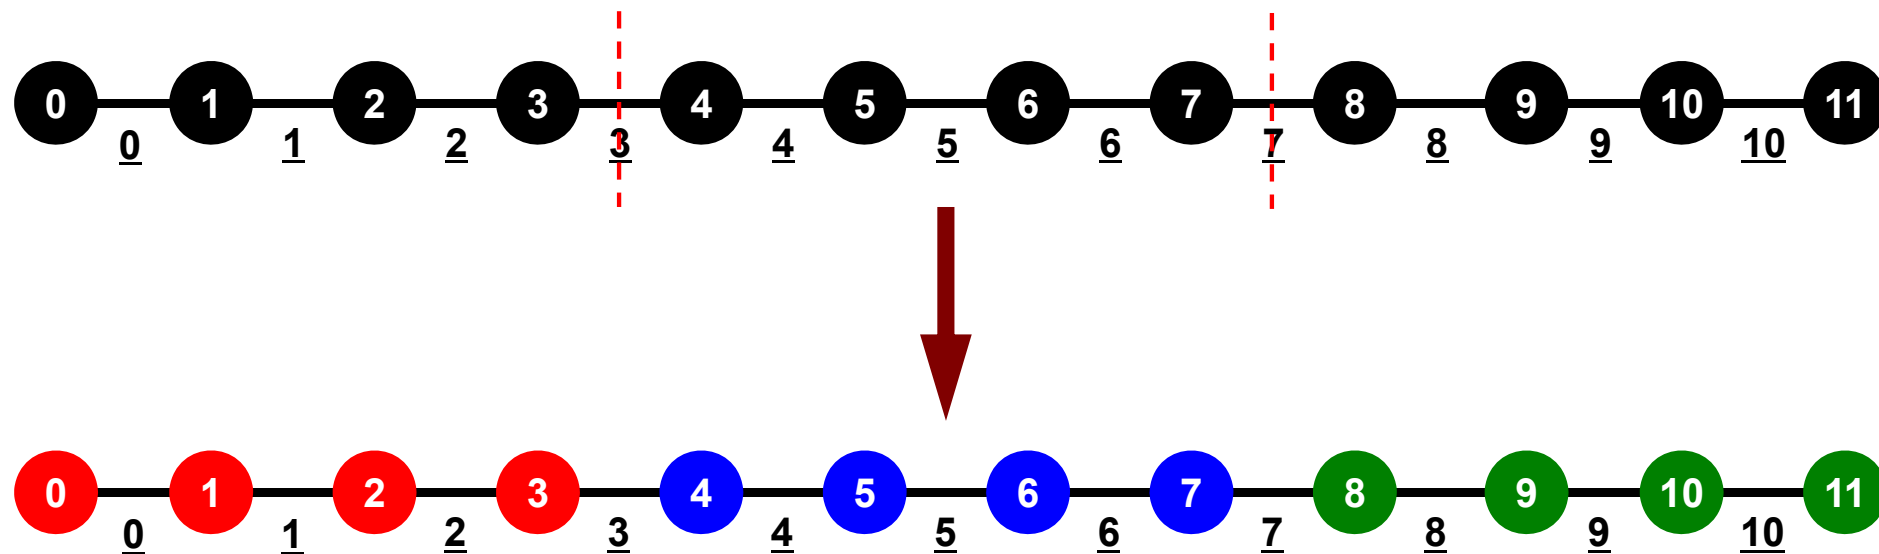

# 1D FEM: 12 nodes/11 elem's/3 domains

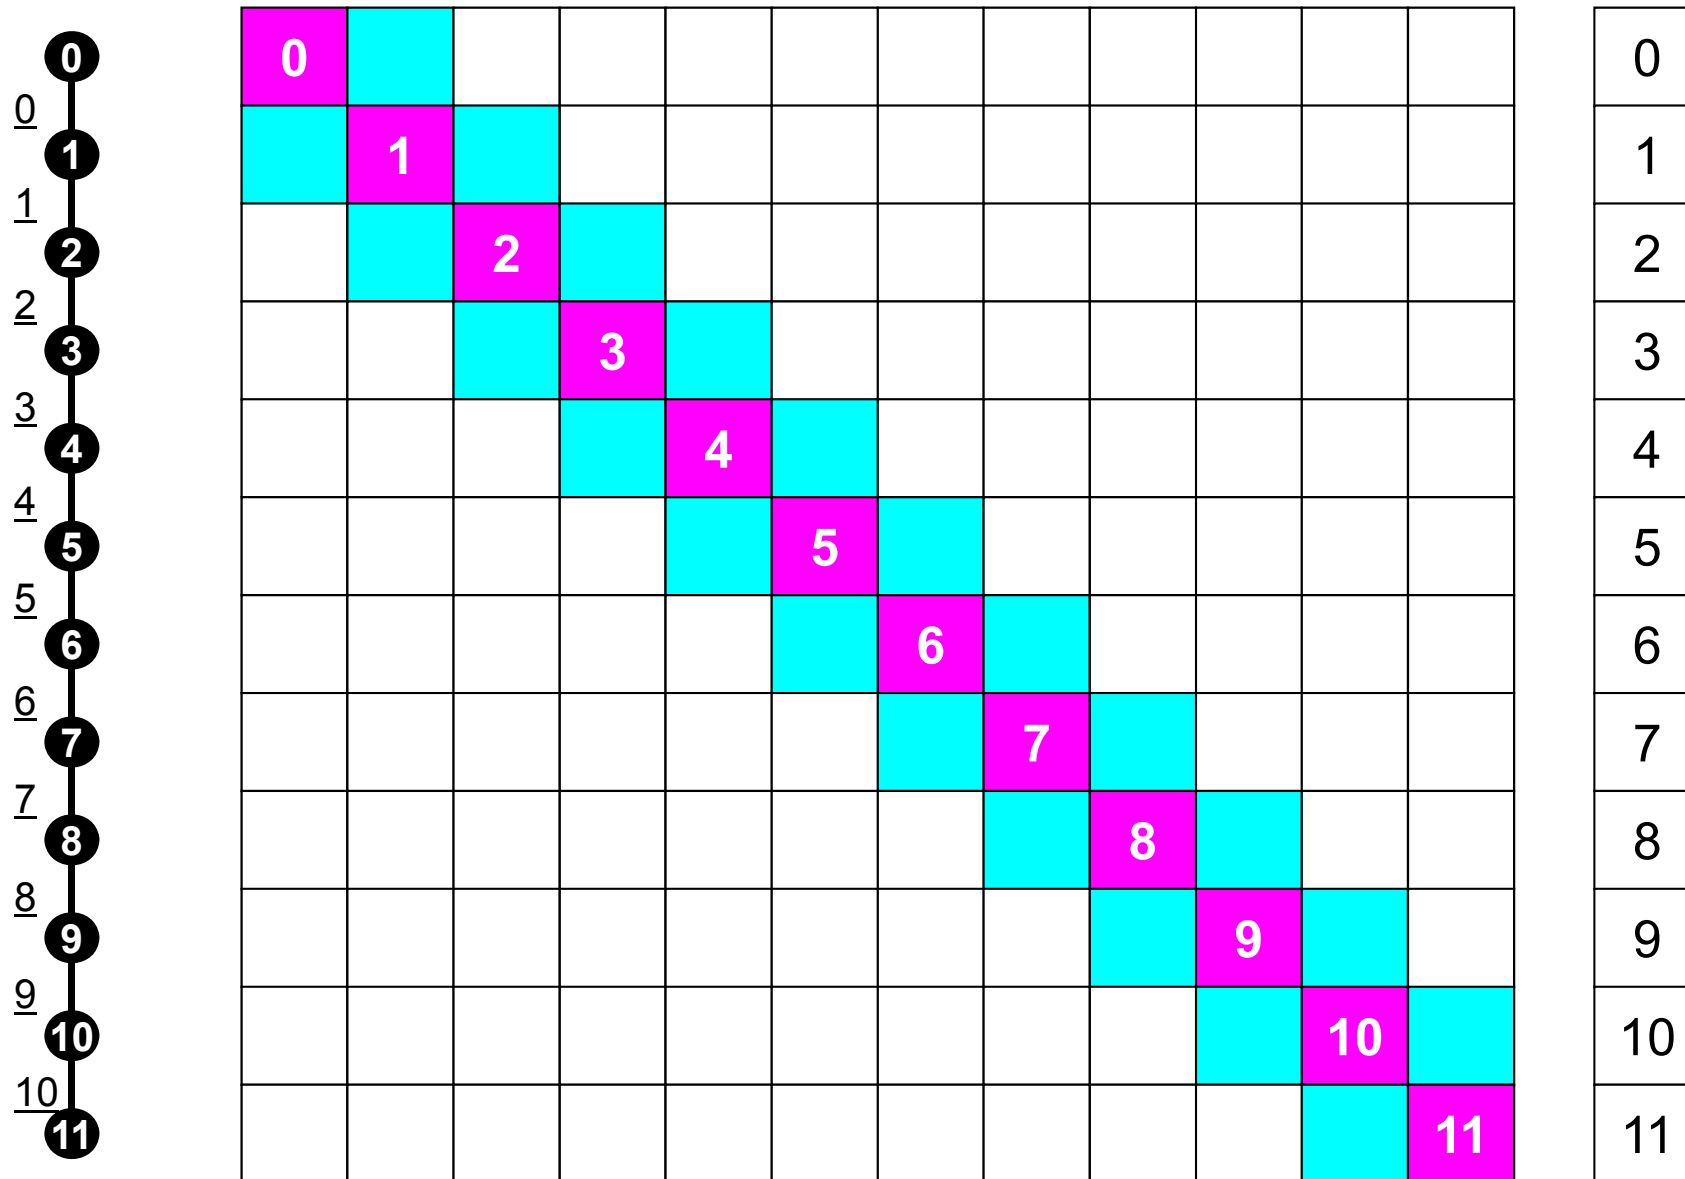

# # “Internal Nodes” should be balanced

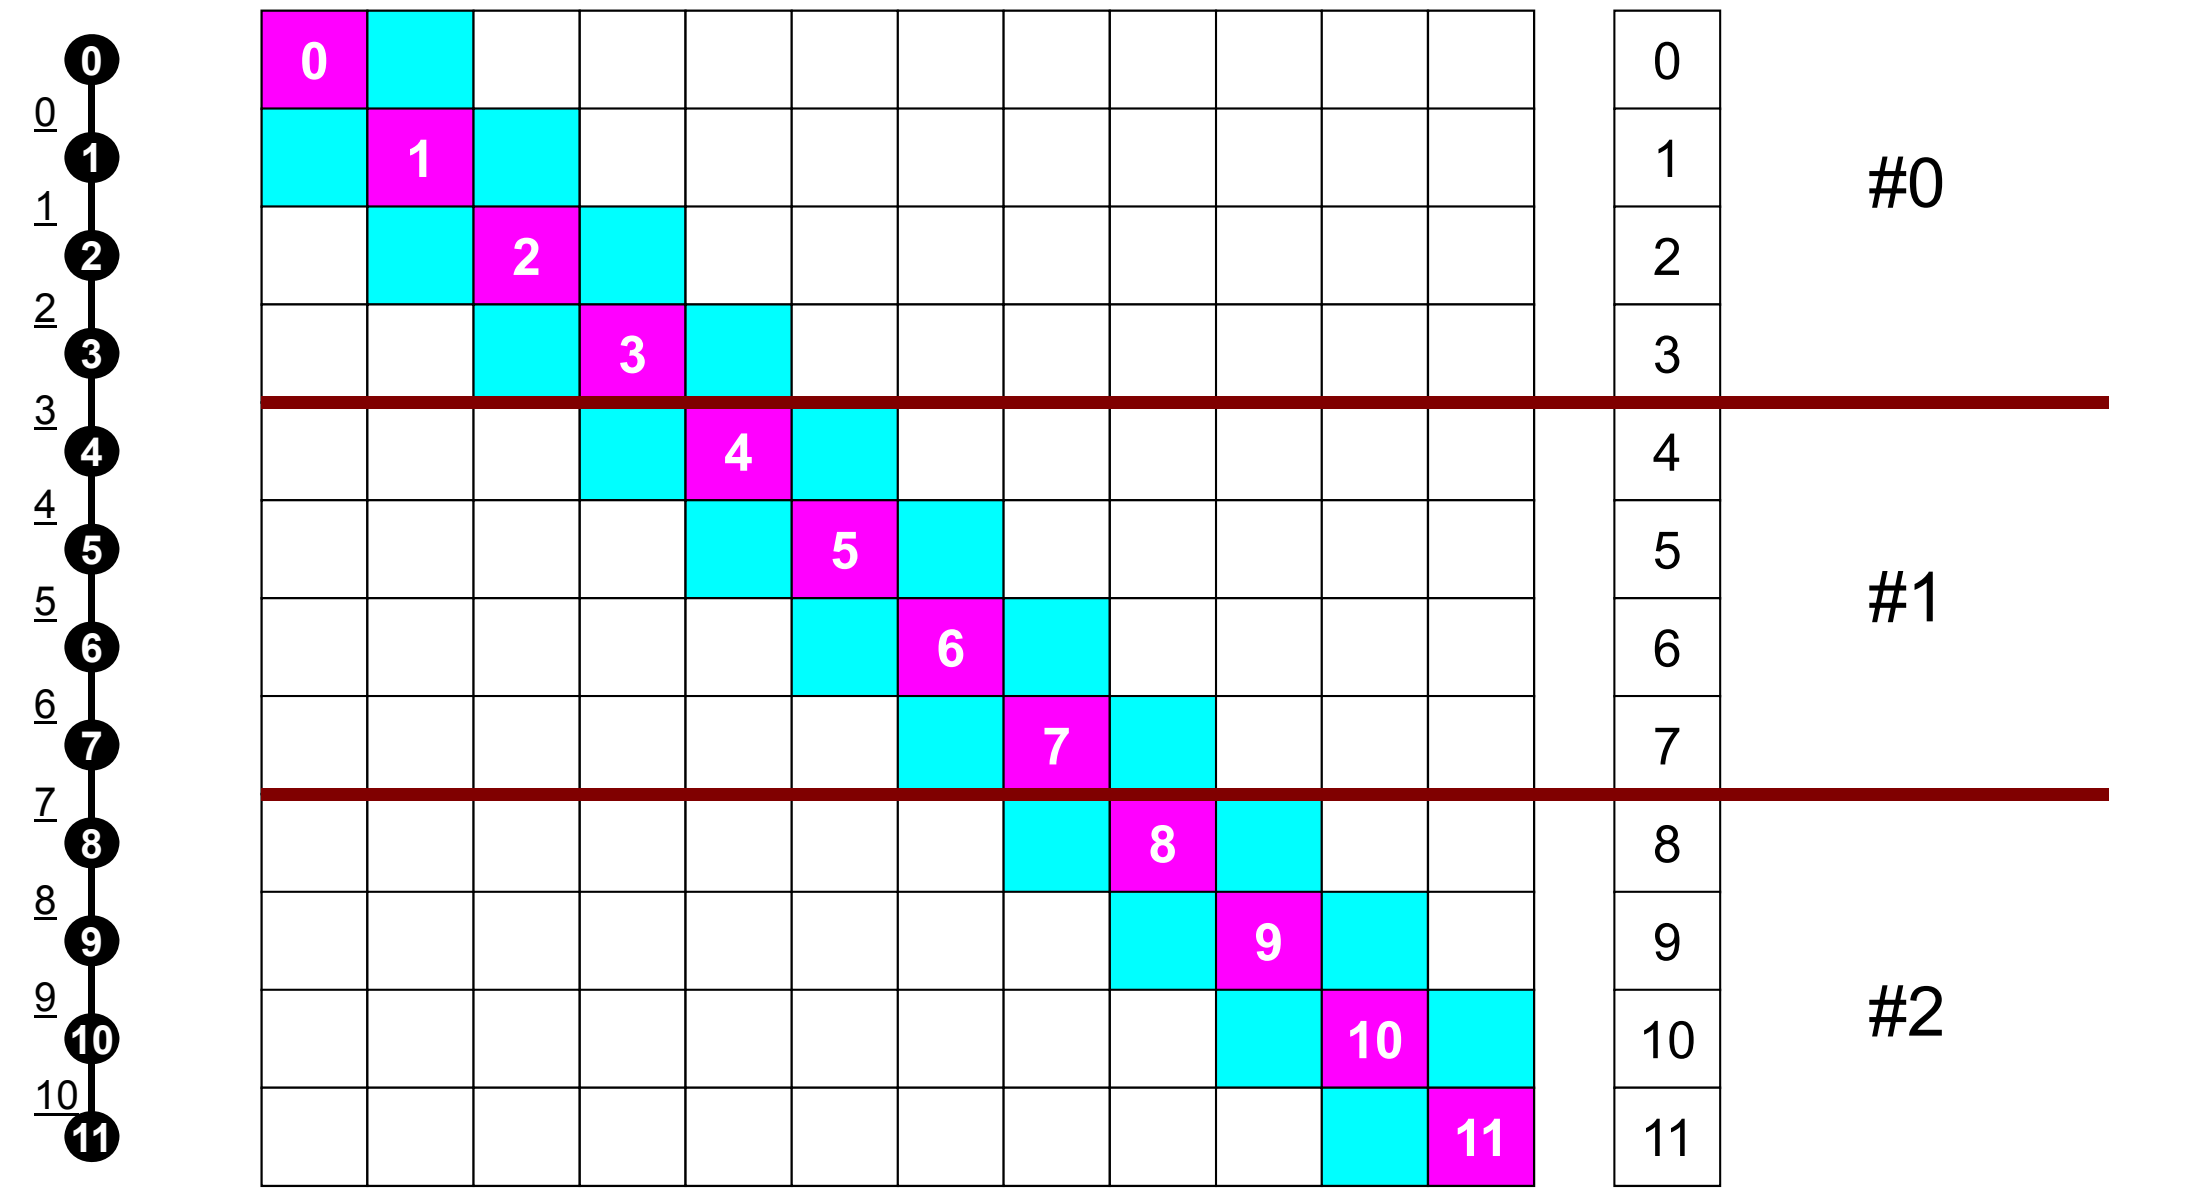


# Matrices are incomplete !

0

1

2

3

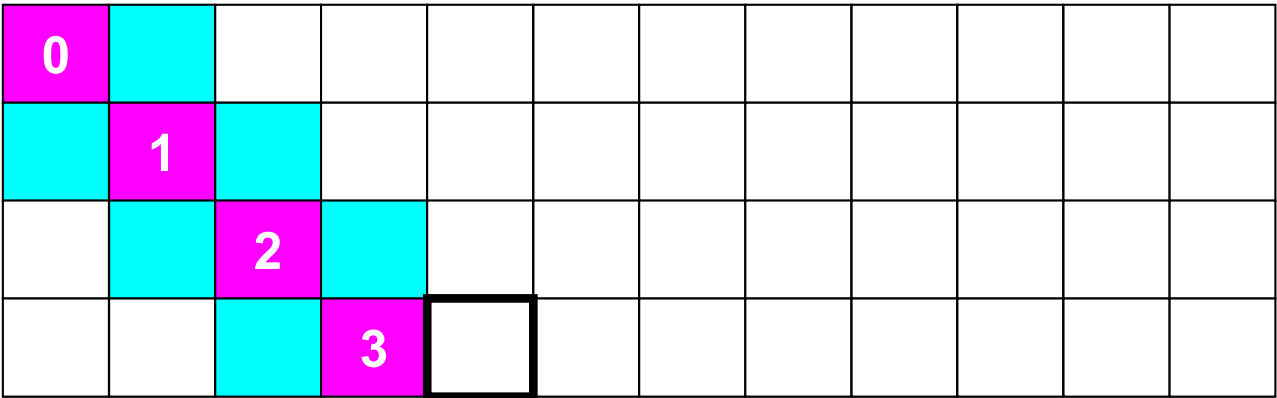


#0

4

5

6

7

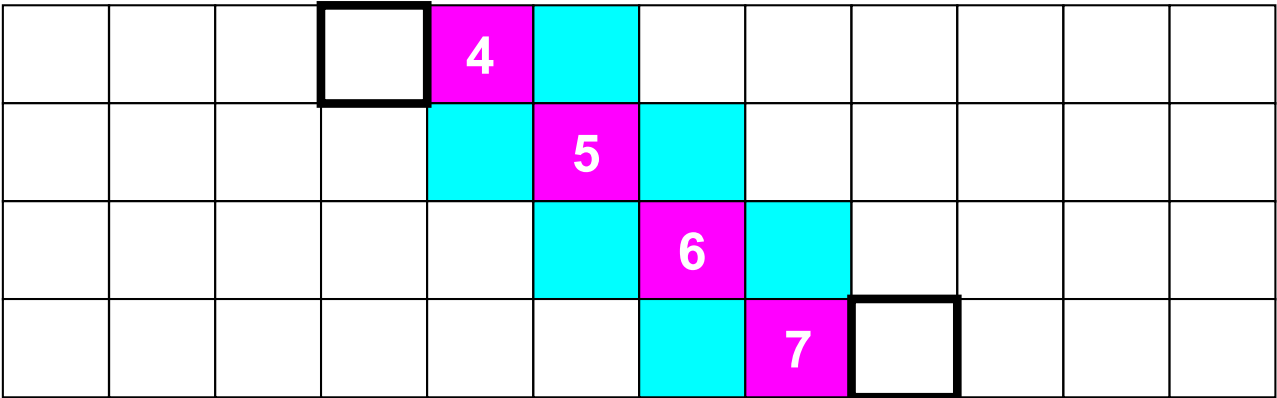


#1

8

9


10

11

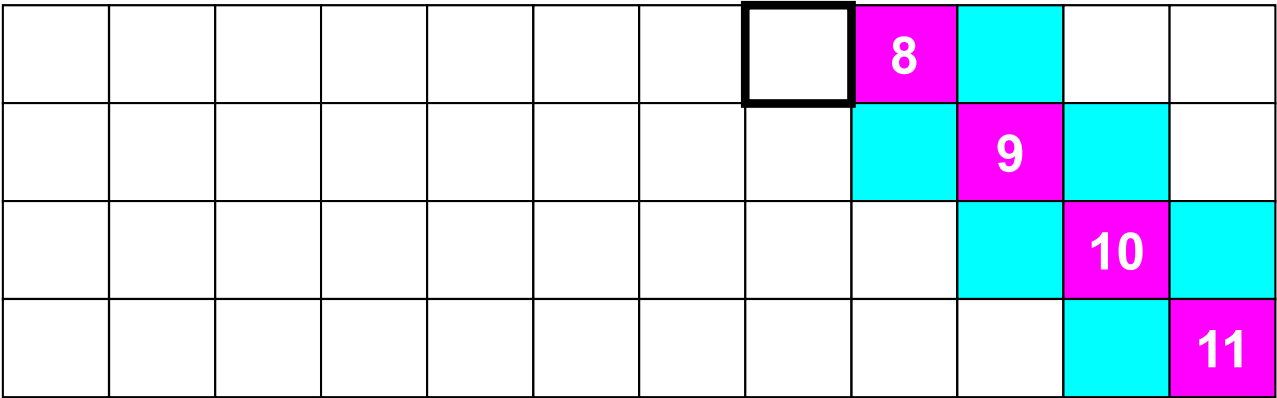


#2


# Connected Elements + External Nodes

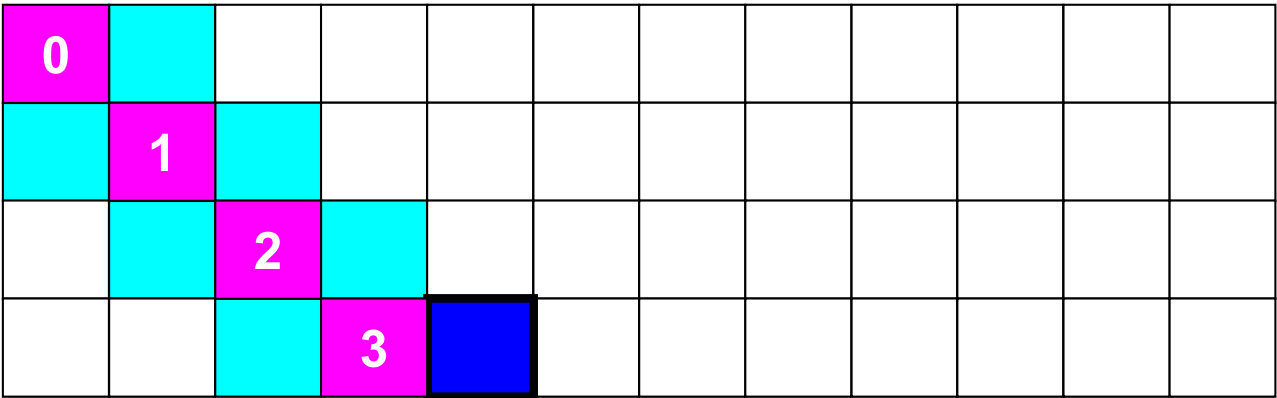




#0

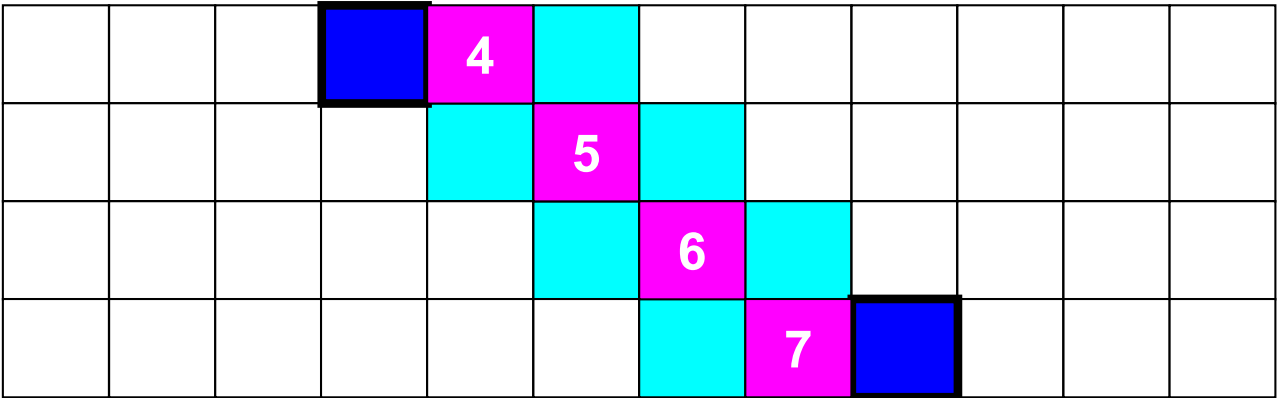


#1

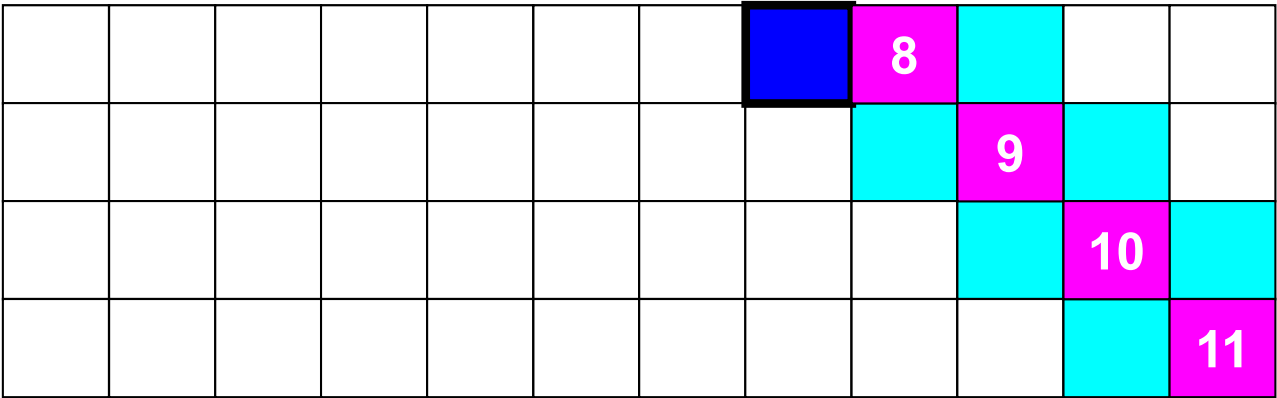

#2




# 1D FEM: 12 nodes/11 elem's/3 domains

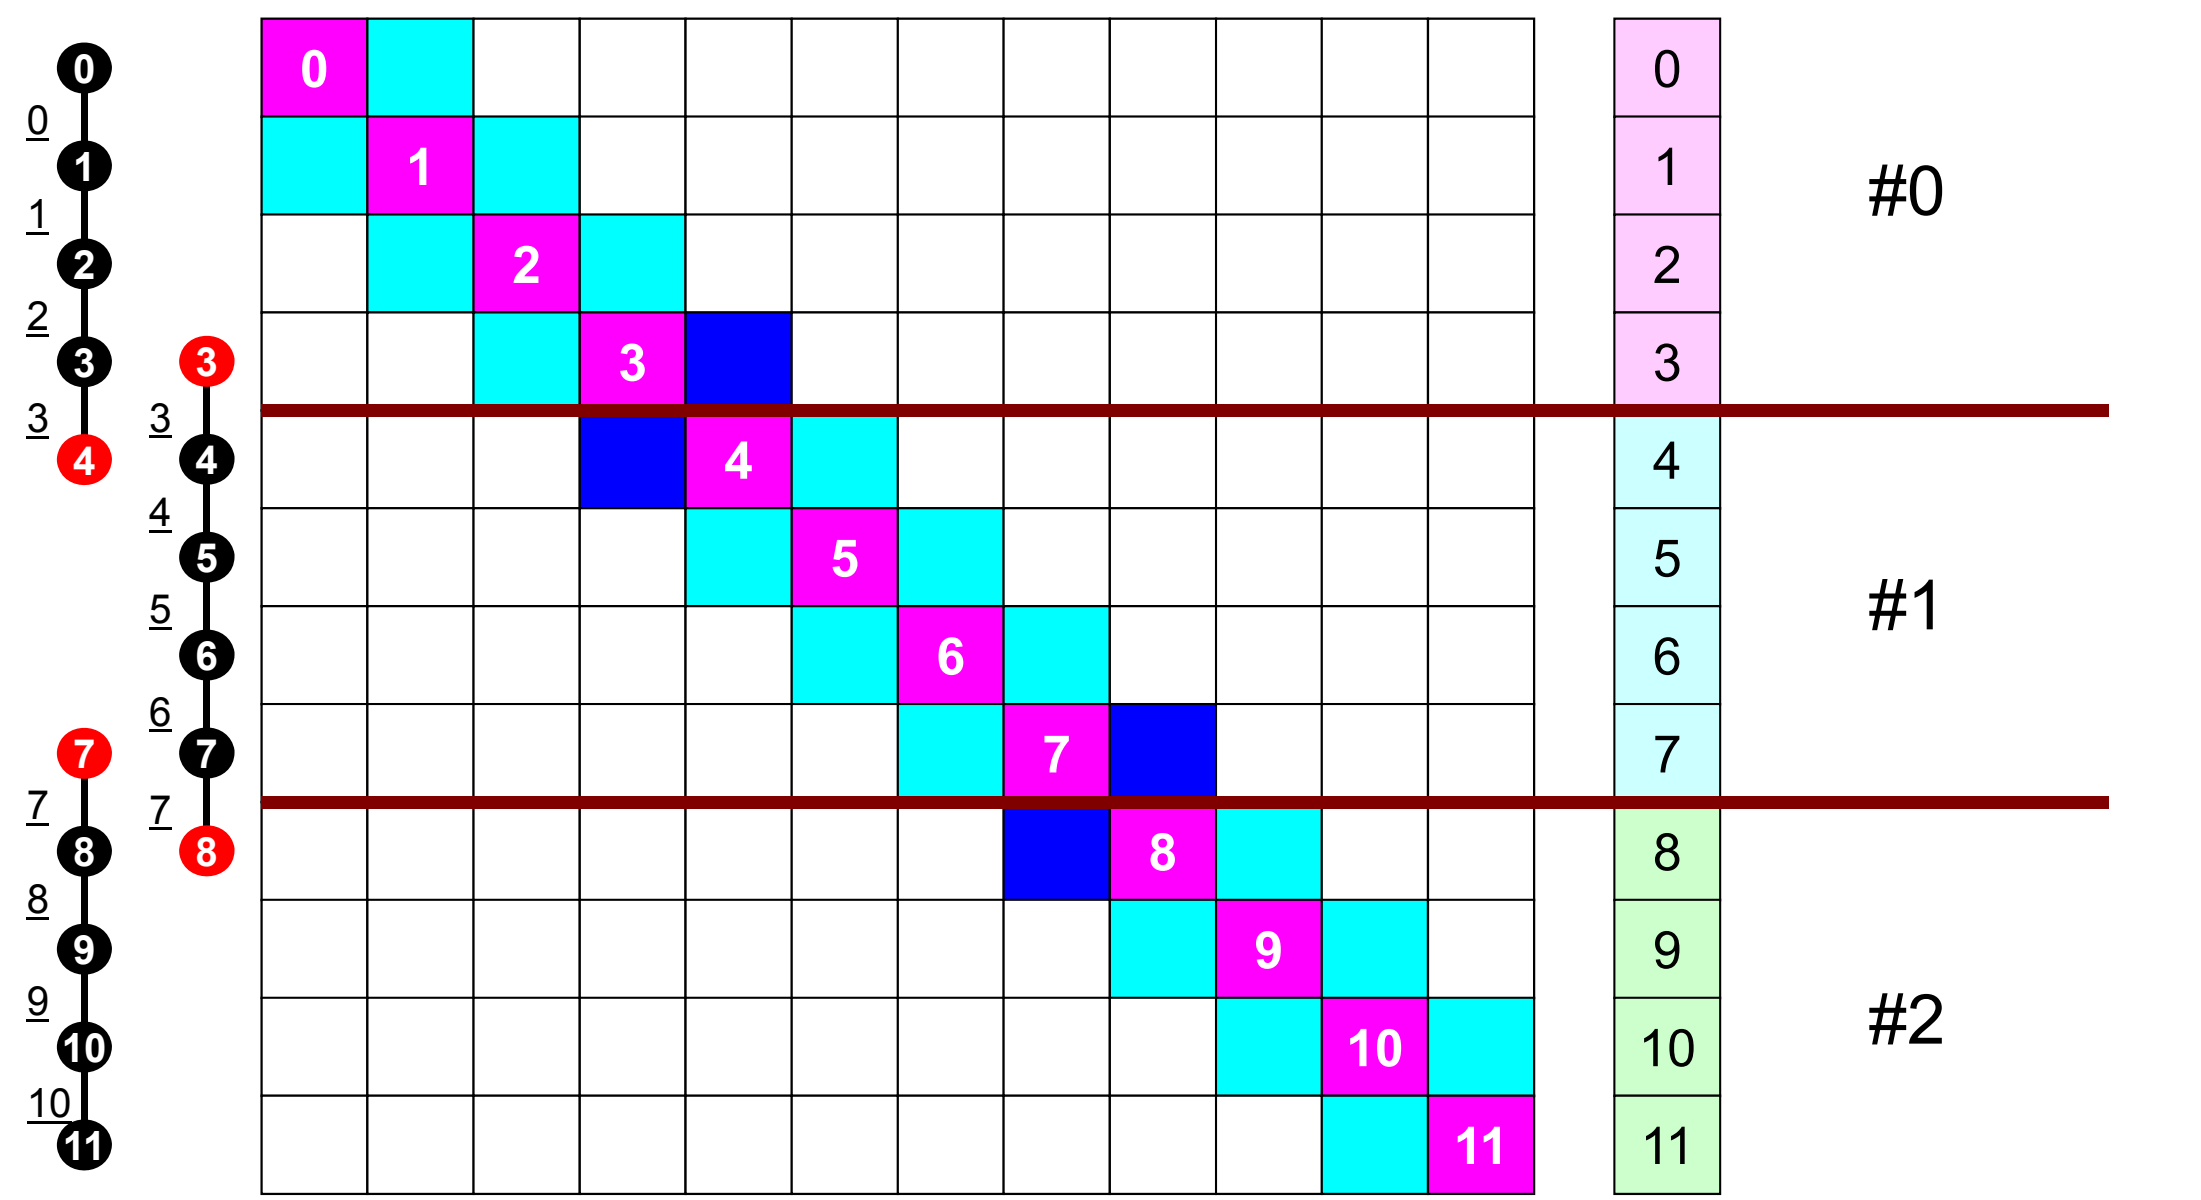




# 1D FEM: 12 nodes/11 elem's/3 domains

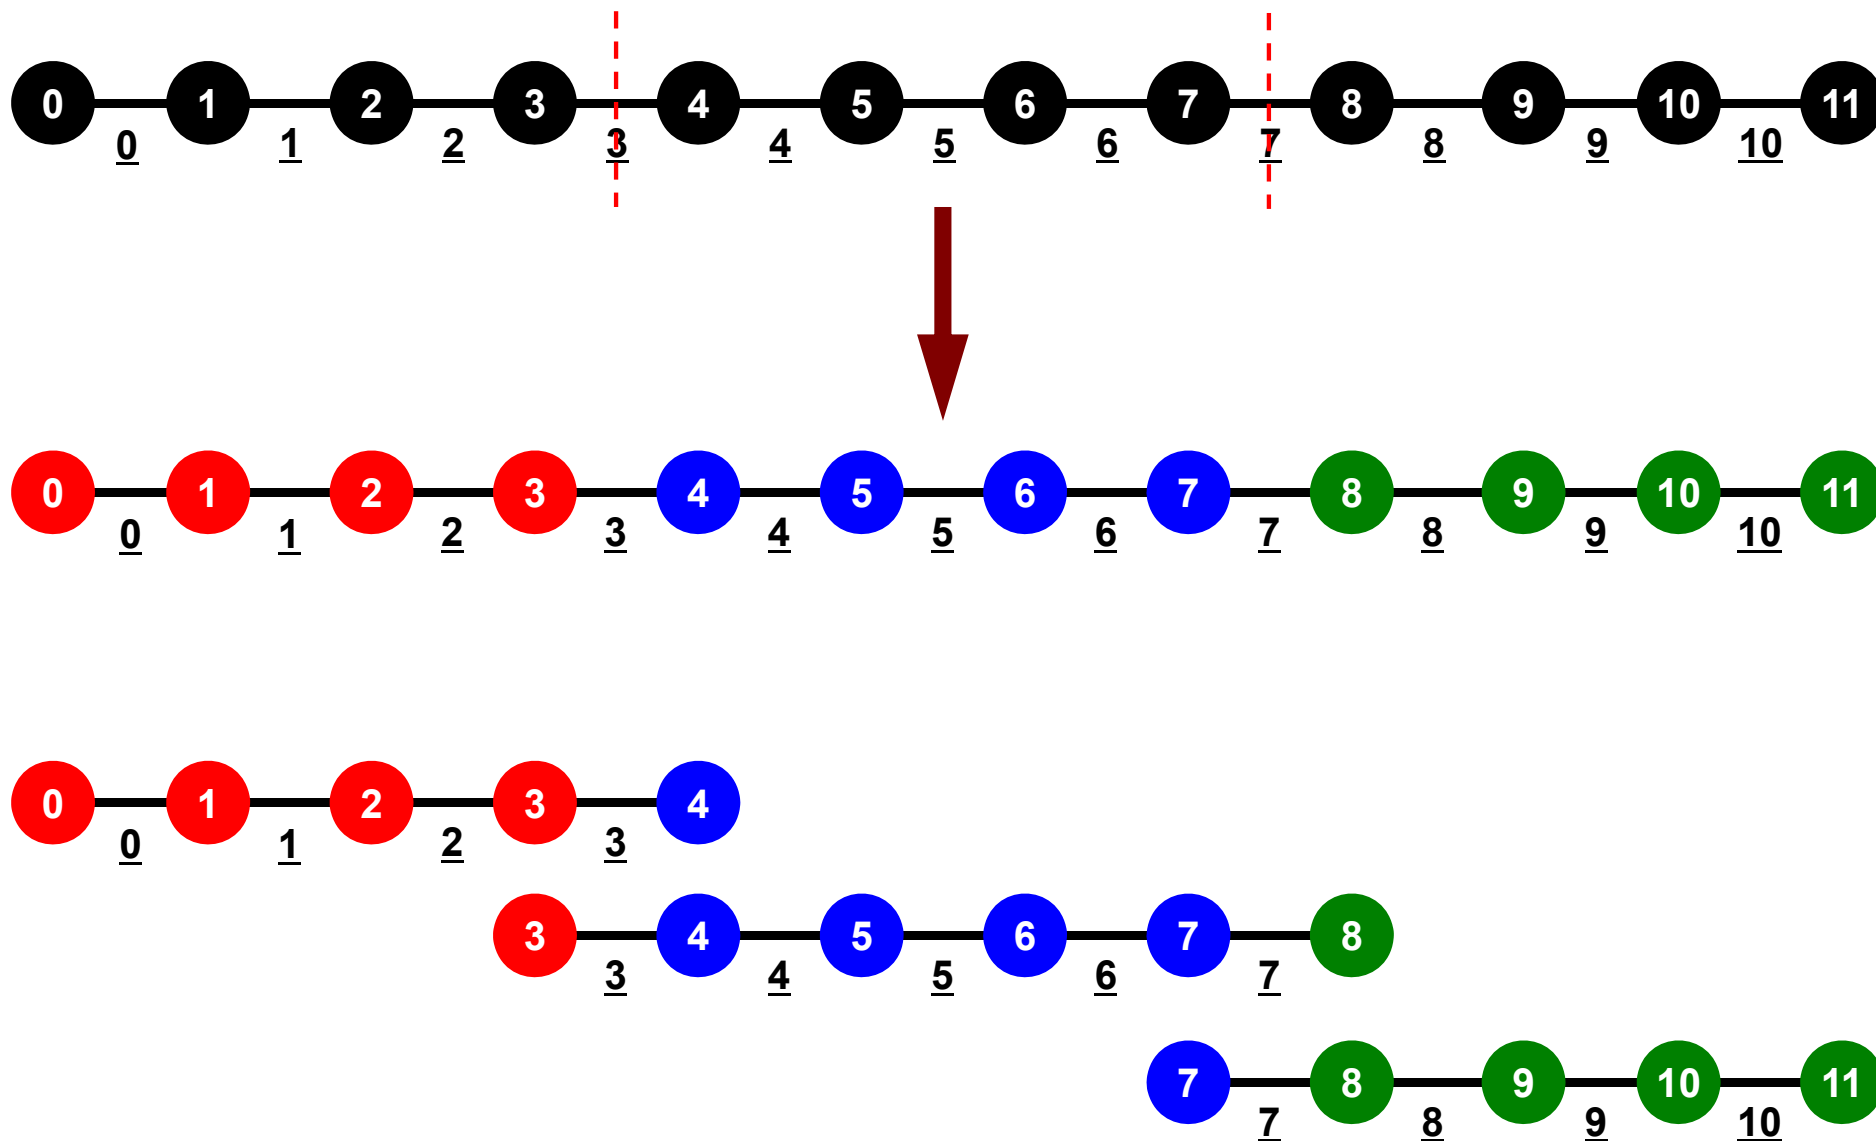

# Local Numbering for SPMD


Numbering of internal nodes is 1-N (0-N-1), same operations in serial program can be applied. How about numbering of external nodes ?

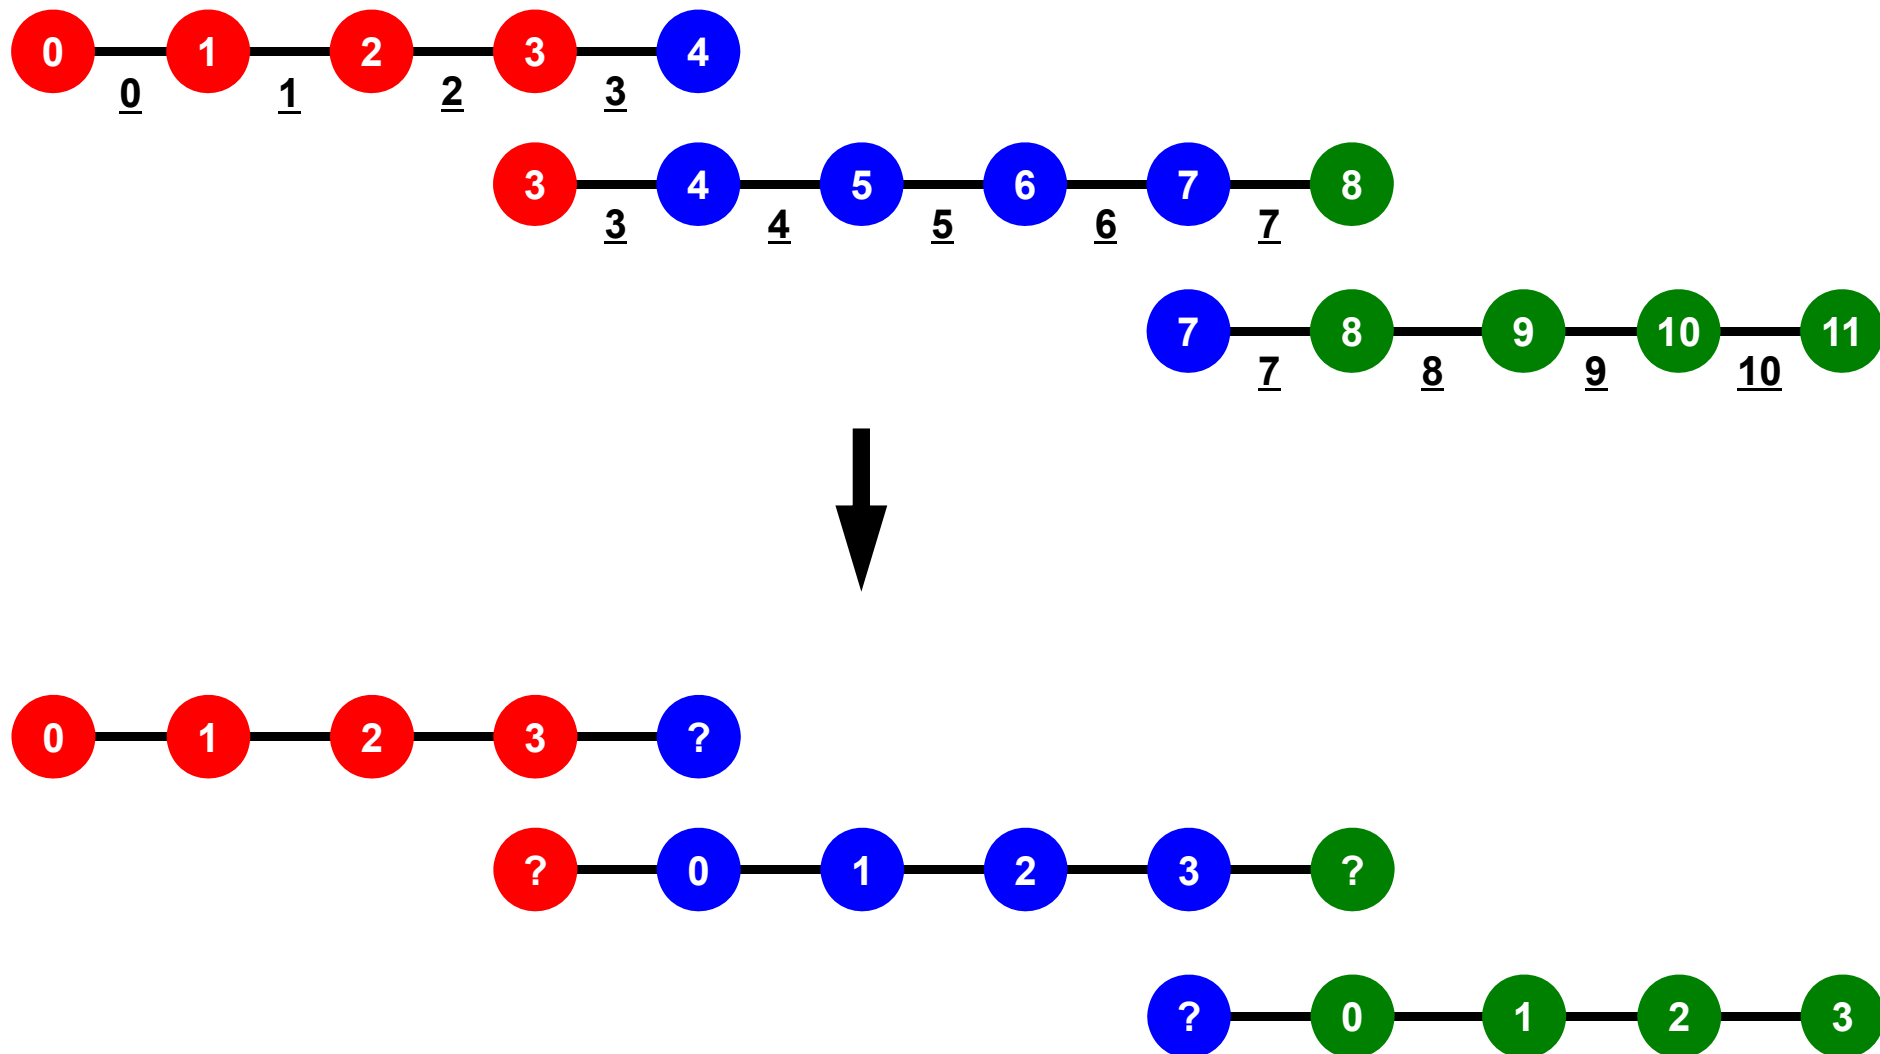

PE: Processing Element  
Processor, Domain, Process

# SPMD

```
mpirun -np M <Program>
```

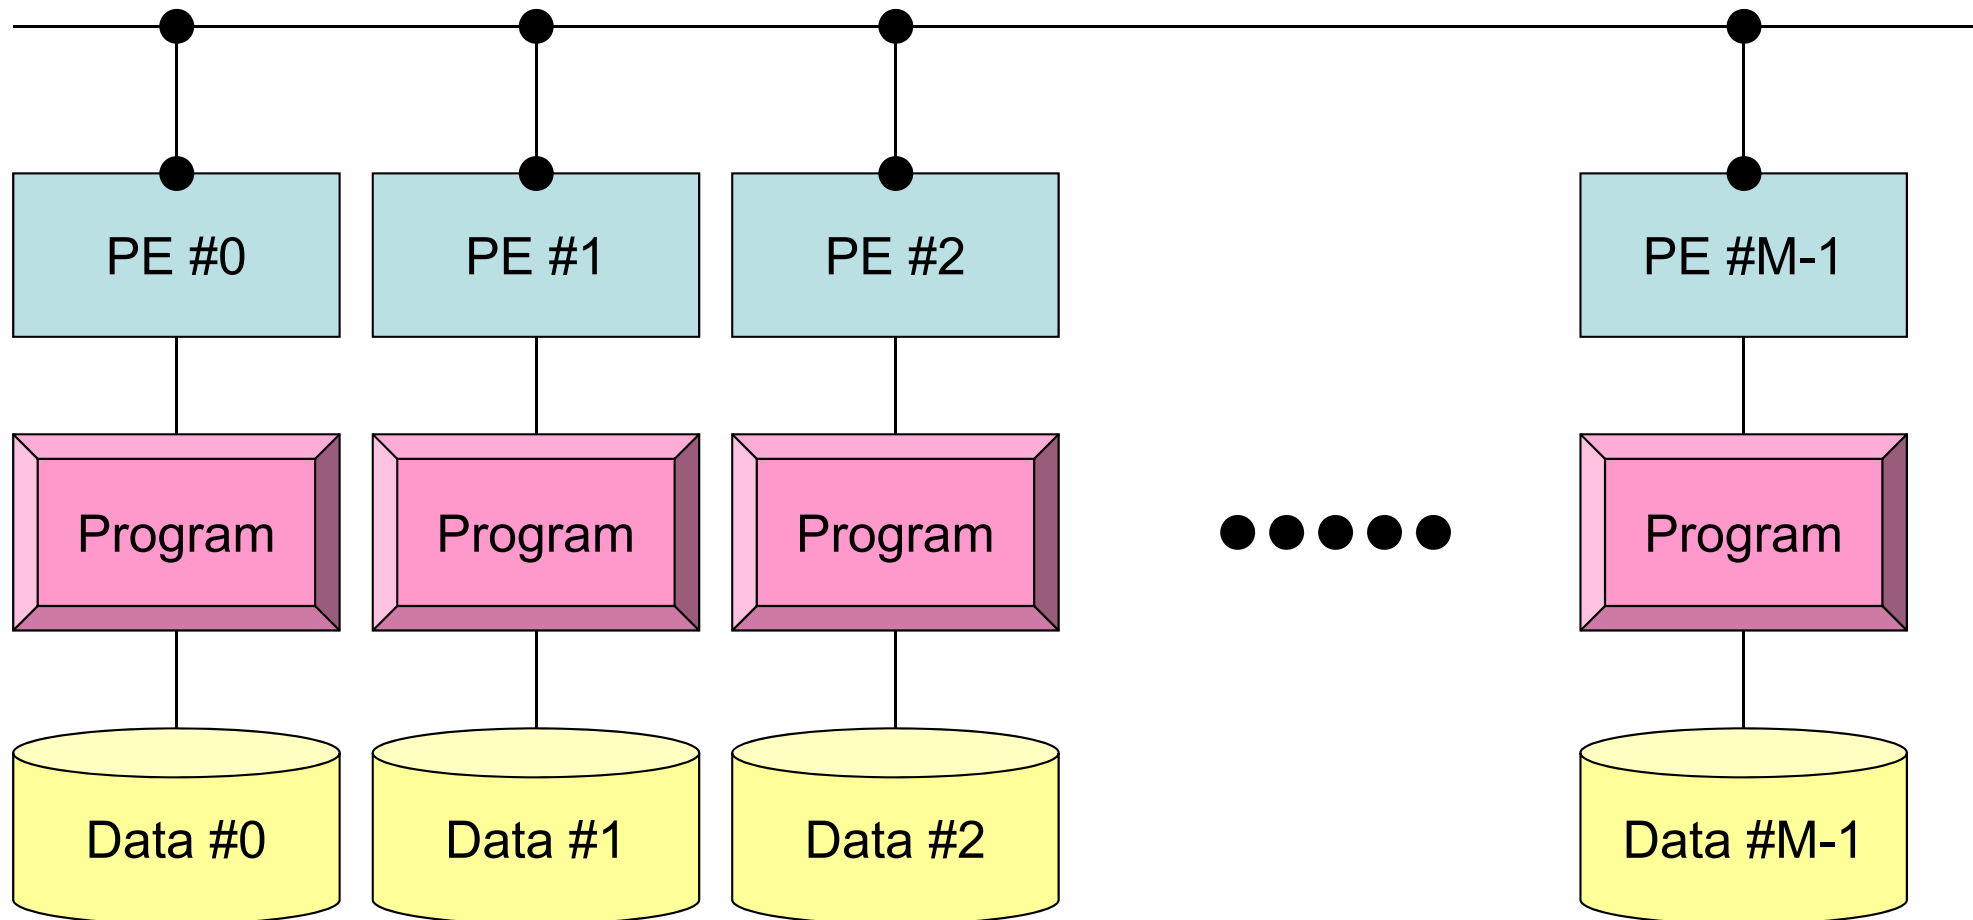


Each process does same operation for different data

Large-scale data is decomposed, and each part is computed by each process

It is ideal that parallel program is not different from serial one except communication.

# Local Numbering for SPMD


Numbering of external nodes:  $N+1$ ,  $N+2$  ( $N, N+1$ )

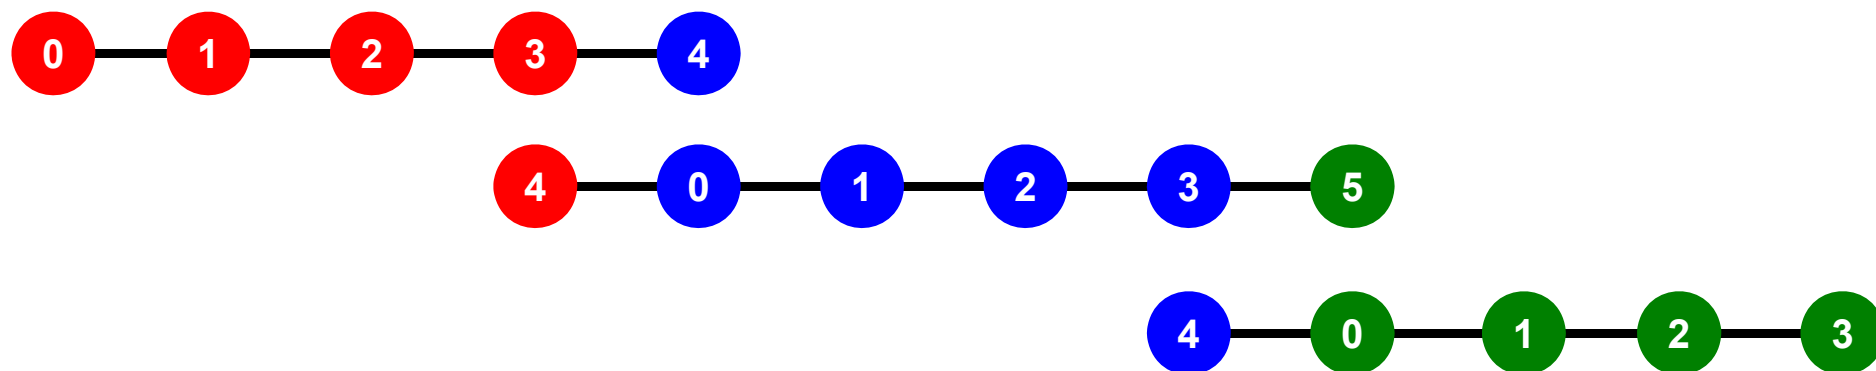

# 1D FEM: 12 nodes/11 elem's/3 domains

Integration on each element, element matrix  $\rightarrow$  global matrix

Operations can be done by info. of internal/external nodes and elements which include these nodes

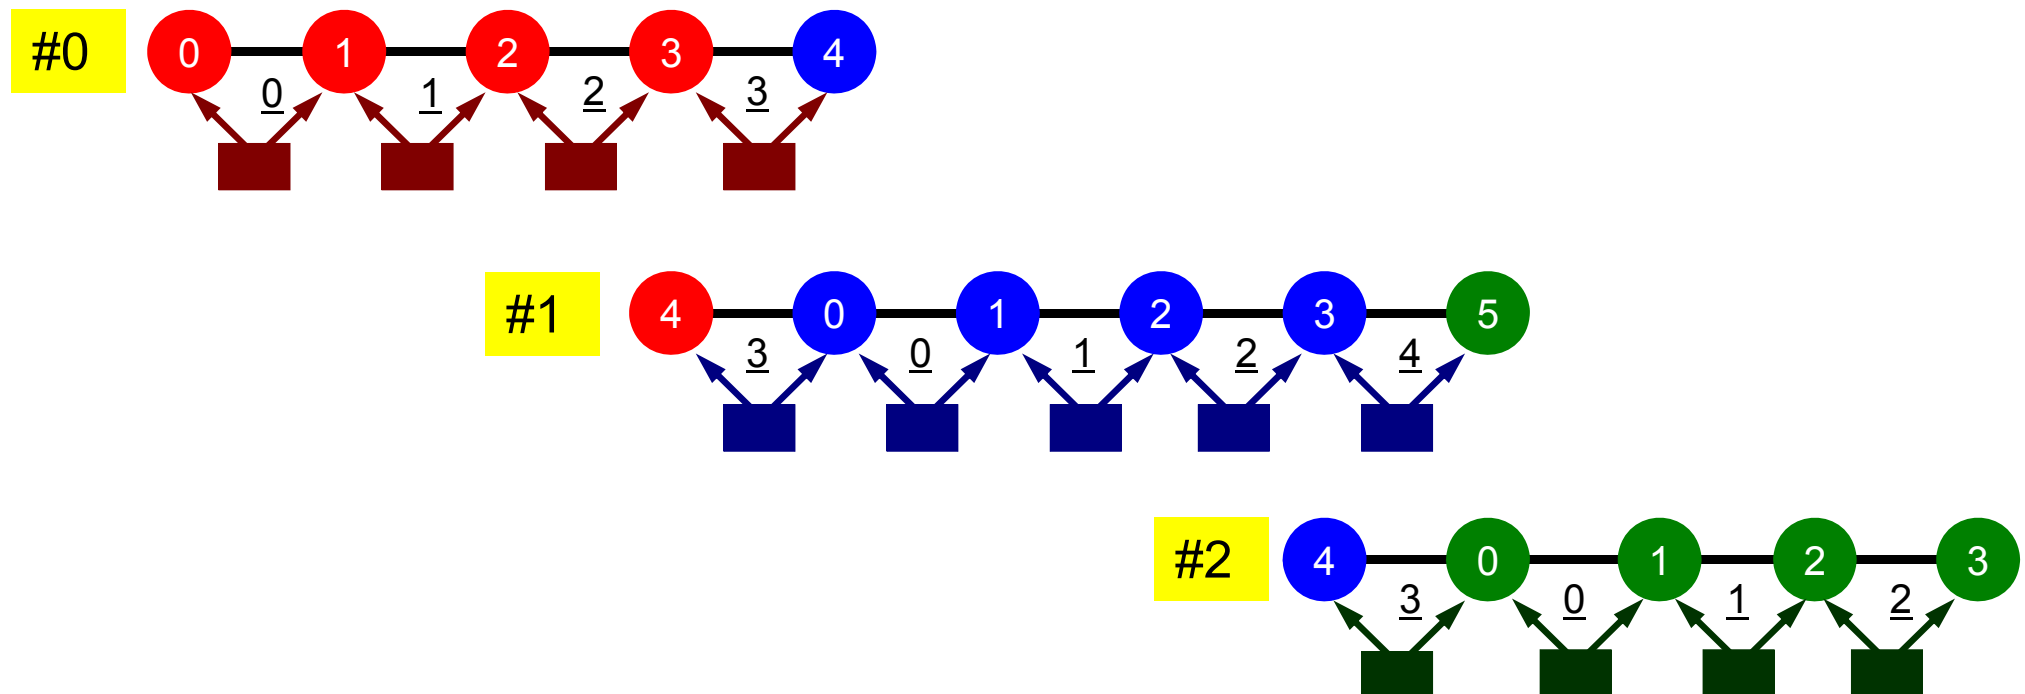

# Finite Element Procedures

- Initialization
  - Control Data
  - Node, Connectivity of Elements (N: Node#, NE: Elem#)
  - Initialization of Arrays (Global/Element Matrices)
  - Element-Global Matrix Mapping (Index, Item)
- Generation of Matrix
  - Element-by-Element Operations (do icel= 1, NE)
    - Element matrices
    - Accumulation to global matrix
  - Boundary Conditions
- Linear Solver
  - Conjugate Gradient Method

# Preconditioned CG Solver

```

Compute  $\mathbf{r}^{(0)} = \mathbf{b} - [\mathbf{A}]\mathbf{x}^{(0)}$ 
for i= 1, 2, ...
  solve  $[\mathbf{M}]\mathbf{z}^{(i-1)} = \mathbf{r}^{(i-1)}$ 
   $\rho_{i-1} = \mathbf{r}^{(i-1)} \cdot \mathbf{z}^{(i-1)}$ 
  if i=1
     $\mathbf{p}^{(1)} = \mathbf{z}^{(0)}$ 
  else
     $\beta_{i-1} = \rho_{i-1} / \rho_{i-2}$ 
     $\mathbf{p}^{(i)} = \mathbf{z}^{(i-1)} + \beta_{i-1} \mathbf{p}^{(i-1)}$ 
  endif
   $\mathbf{q}^{(i)} = [\mathbf{A}]\mathbf{p}^{(i)}$ 
   $\alpha_i = \rho_{i-1} / \mathbf{p}^{(i)} \cdot \mathbf{q}^{(i)}$ 
   $\mathbf{x}^{(i)} = \mathbf{x}^{(i-1)} + \alpha_i \mathbf{p}^{(i)}$ 
   $\mathbf{r}^{(i)} = \mathbf{r}^{(i-1)} - \alpha_i \mathbf{q}^{(i)}$ 
  check convergence  $|\mathbf{r}|$ 
end

```

$$[\mathbf{M}] = \begin{bmatrix} D_1 & 0 & \dots & 0 & 0 \\ 0 & D_2 & & 0 & 0 \\ \dots & & \dots & & \dots \\ 0 & 0 & & D_{N-1} & 0 \\ 0 & 0 & \dots & 0 & D_N \end{bmatrix}$$

# Preconditioning, DAXPY

Local Operations by Only Internal Points: Parallel Processing is possible

```
/*
//-- {z}= [Minv]{r}
*/
for(i=0;i<N;i++){
    W[Z][i] = W[DD][i] * W[R][i];
}
```

```
/*
//-- {x}= {x} + ALPHA*{p}      DAXPY: double a{x} plus {y}
// {r}= {r} - ALPHA*{q}
*/
for(i=0;i<N;i++){
    U[i] += Alpha * W[P][i];
    W[R][i] -= Alpha * W[Q][i];
}
```

0
1
2
3
4
5
6
7
8
9
10
11




# Dot Products

Global Summation needed: Communication ?

```
/*  
/-- ALPHA= RHO / {p} {q}  
*/  
C1 = 0.0;  
for (i=0; i<N; i++) {  
    C1 += W[P][i] * W[Q][i];  
}  
  
Alpha = Rho / C1;
```

0
1
2
3
4
5
6
7
8
9
10
11


# MPI\_Reduce

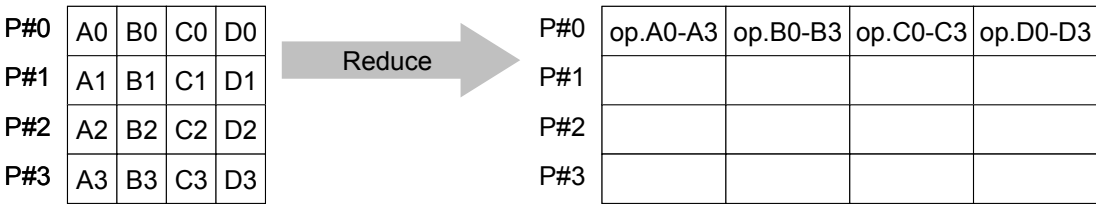

- Reduces values on all processes to a single value
  - Summation, Product, Max, Min etc.
- **MPI\_Reduce (sendbuf,recvbuf,count,datatype,op,root,comm)**
  - sendbuf      choice      I              starting address of send buffer
  - recvbuf      choice      O              starting address receive buffer
  - count          int            I              number of elements in send/receive buffer
  - datatype      MPI\_Datatype I              data type of elements of send/recive buffer
  - FORTRAN      MPI\_INTEGER, MPI\_REAL, MPI\_DOUBLE\_PRECISION, MPI\_CHARACTER etc.
  - C              MPI\_INT, MPI\_FLOAT, MPI\_DOUBLE, MPI\_CHAR etc
  - op              MPI\_Op        I              reduce operation
  - MPI\_MAX, MPI\_MIN, MPI\_SUM, MPI\_PROD, MPI\_LAND, MPI\_BAND etc
  - Users can define operations by MPI\_OP\_CREATE
  - root            int            I              rank of root process
  - comm            MPI\_Comm    I              communicator



# MPI\_Bcast

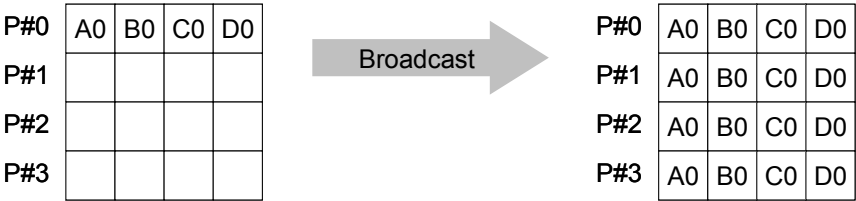

- Broadcasts a message from the process with rank "root" to all other processes of the communicator
- **MPI\_Bcast (buffer, count, datatype, root, comm)**
  - buffer choice I/O starting address of buffer  
type is defined by "datatype"
  - count int I number of elements in send/recv buffer
  - datatype MPI\_Datatype I data type of elements of send/recv buffer
    - FORTTRAN MPI\_INTEGER, MPI\_REAL, MPI\_DOUBLE\_PRECISION, MPI\_CHARACTER etc.
    - C MPI\_INT, MPI\_FLOAT, MPI\_DOUBLE, MPI\_CHAR etc.
  - root int I rank of root process
  - comm MPI\_Comm I communicator



# “op” of MPI\_Reduce/Allreduce

C

## MPI\_Reduce


(sendbuf,recvbuf,count,datatype,op,root,comm)

- MPI\_MAX, MPI\_MIN      Max, Min
- MPI\_SUM, MPI\_PROD      Summation, Product
- MPI\_LAND      Logical AND


# Matrix-Vector Products

## Values at External Points: P-to-P Communication


```
/*  
//-- {q} = [A] {p}  
*/  
for (i=0; i<N; i++) {  
    W[Q][i] = Diag[i] * W[P][i];  
    for (j=Index[i]; j<Index[i+1]; j++) {  
        W[Q][i] += AMat[j]*W[P][Item[j]];  
    }  
}
```



# Mat-Vec Products: Local Op. Possible





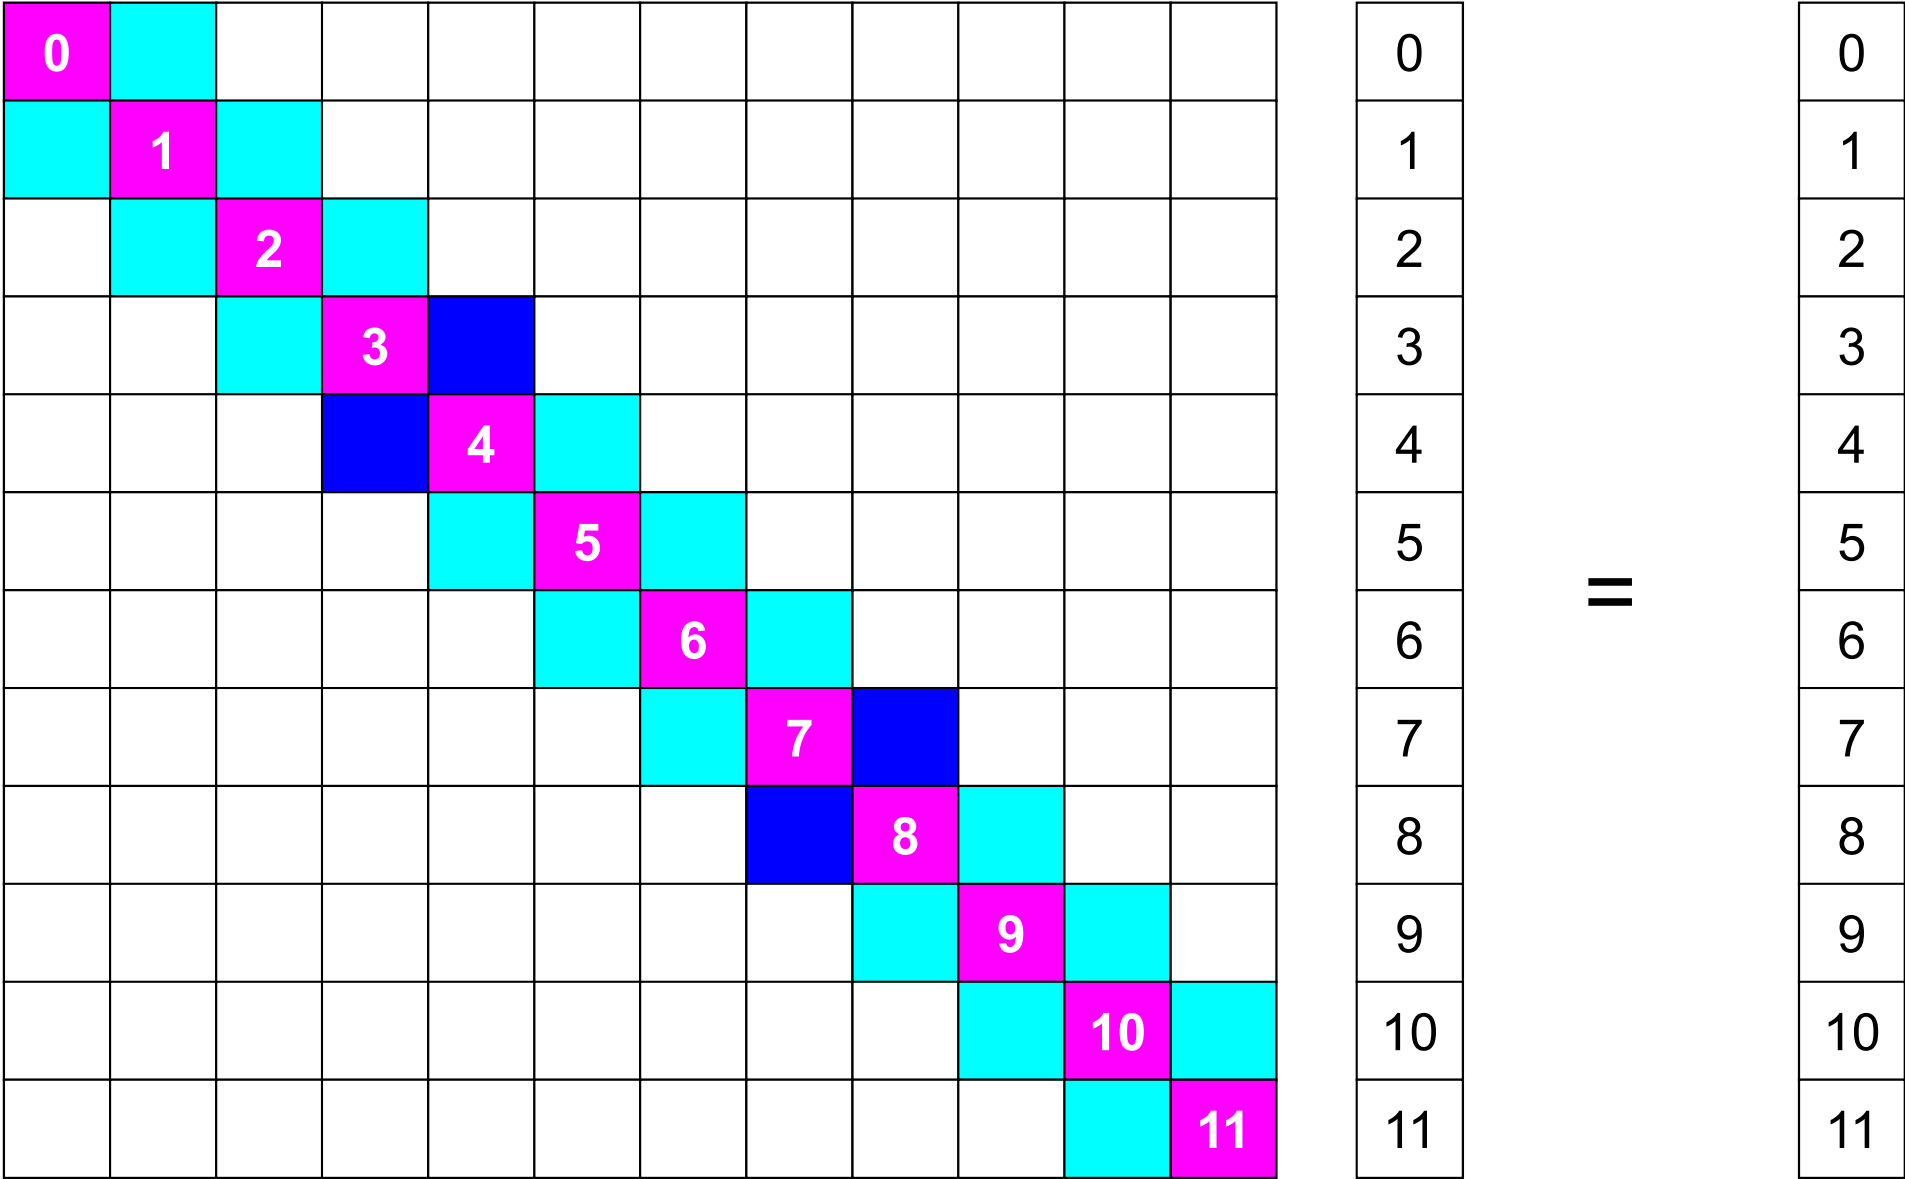


# Mat-Vec Products: Local Op. Possible




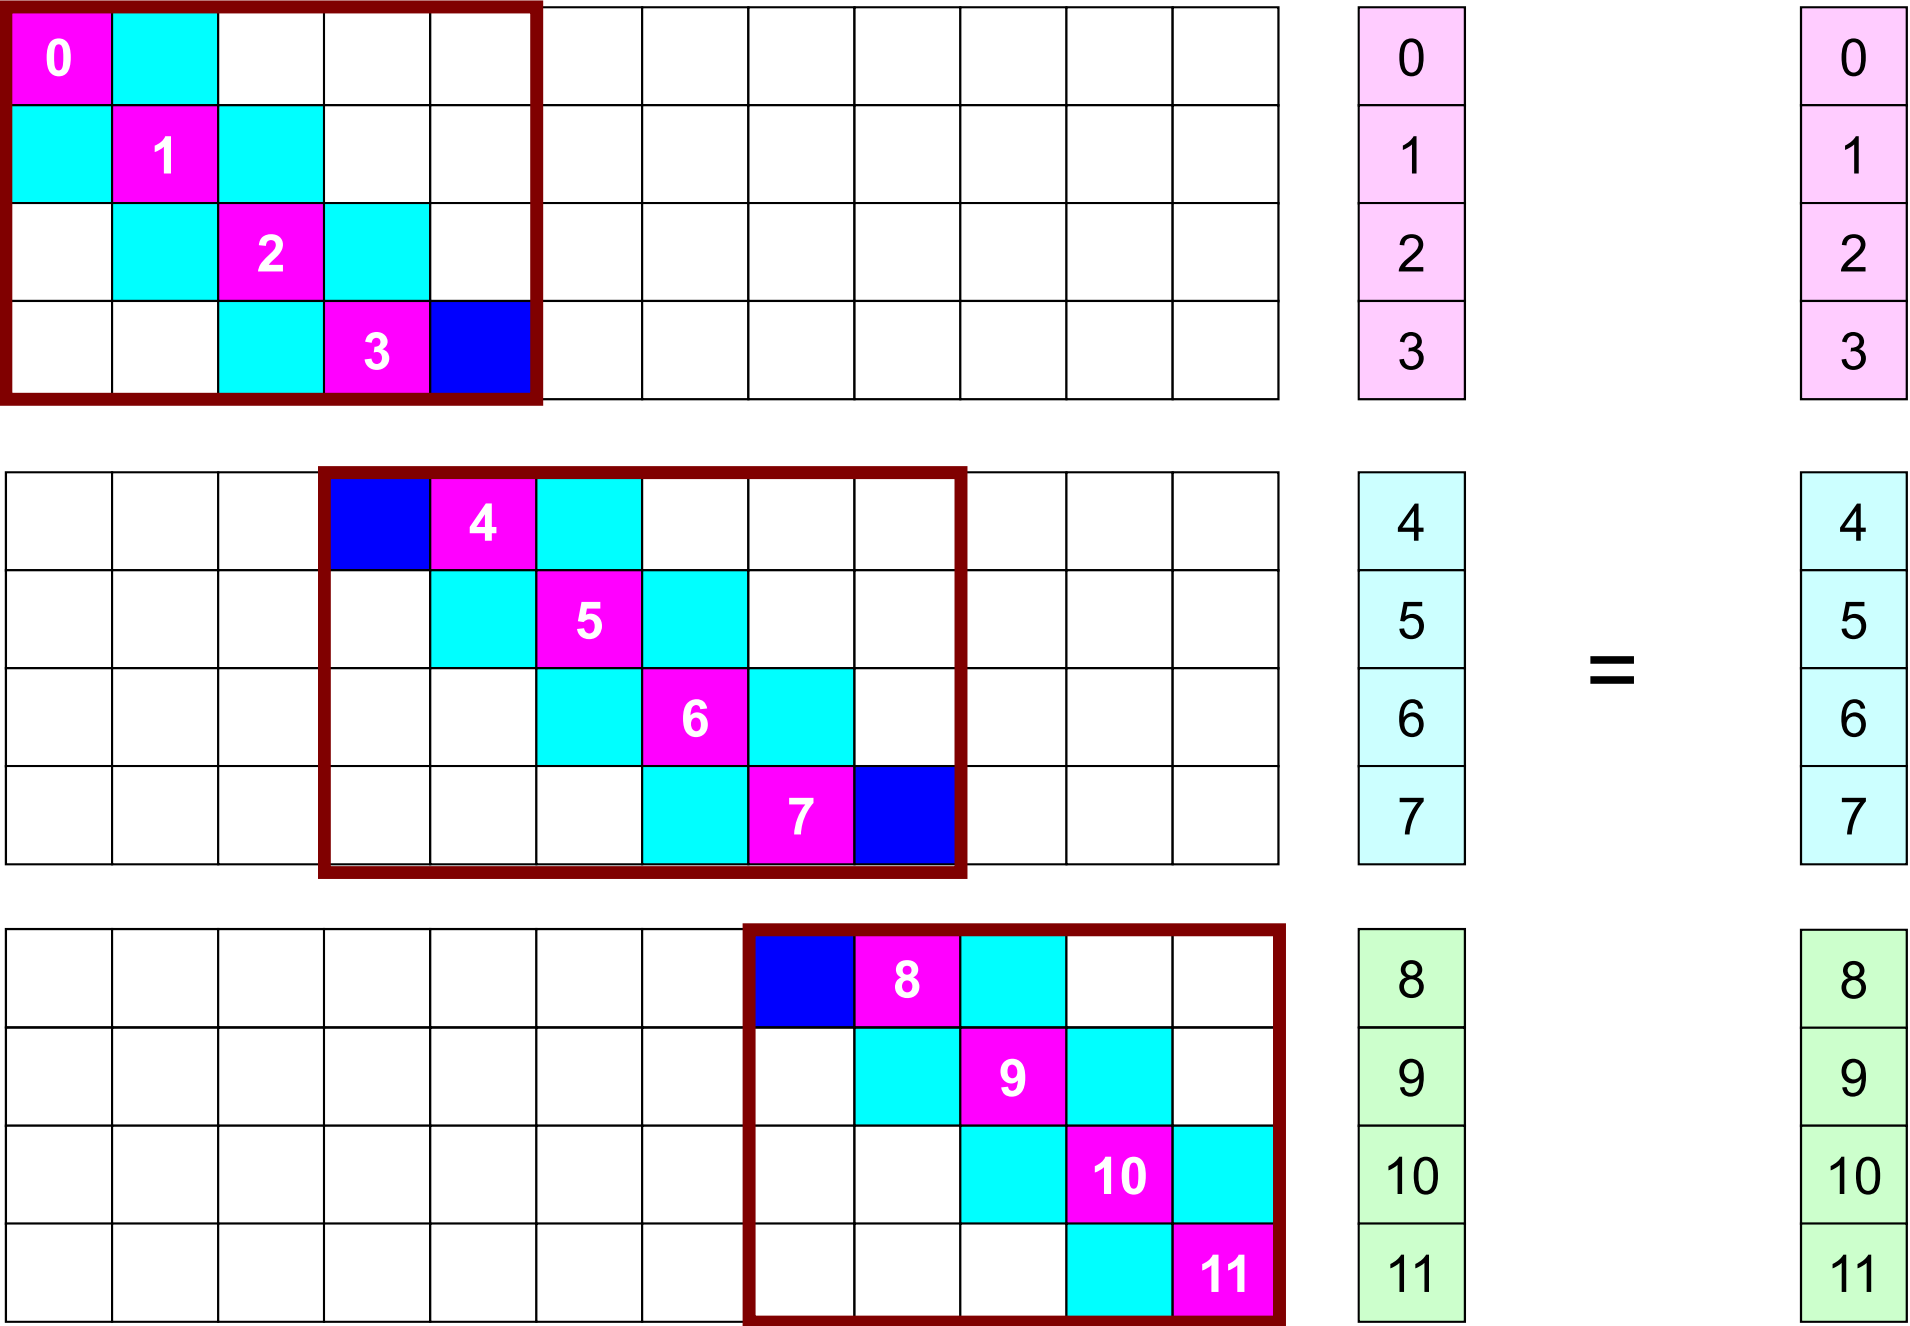





# Mat-Vec Products: Local Op. Possible

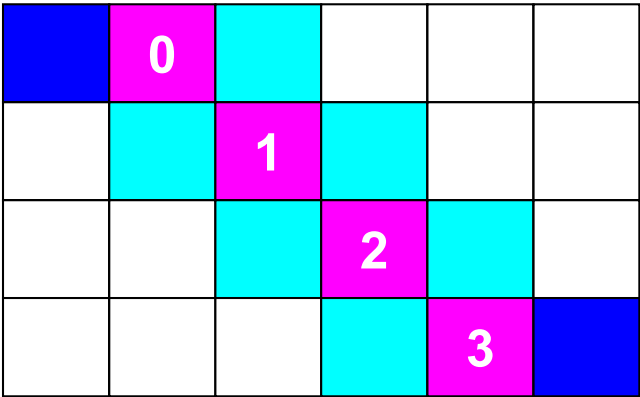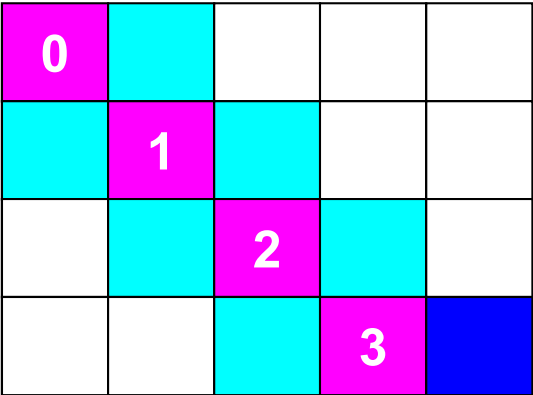




=

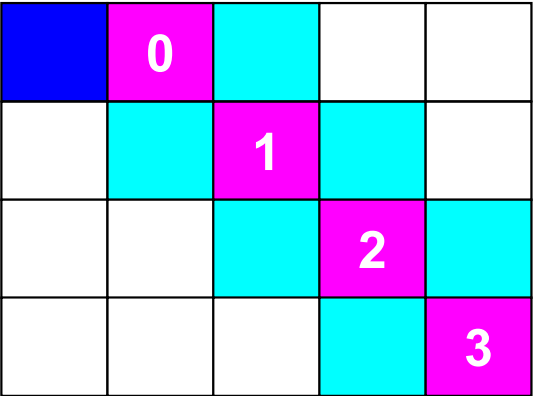



# Mat-Vec Products: Local Op. #0

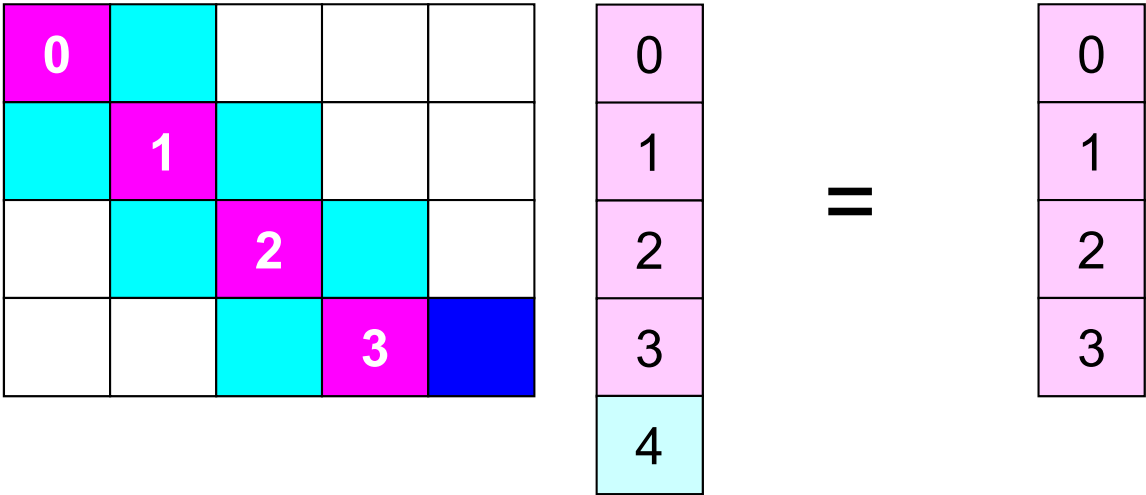


# Mat-Vec Products: Local Op. #1

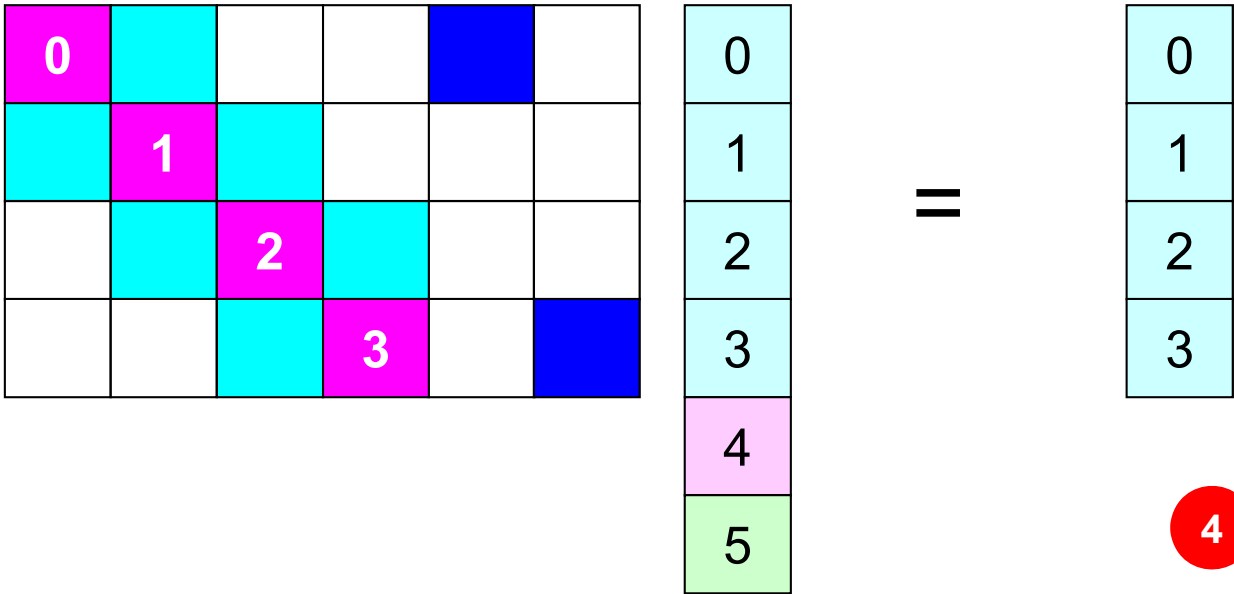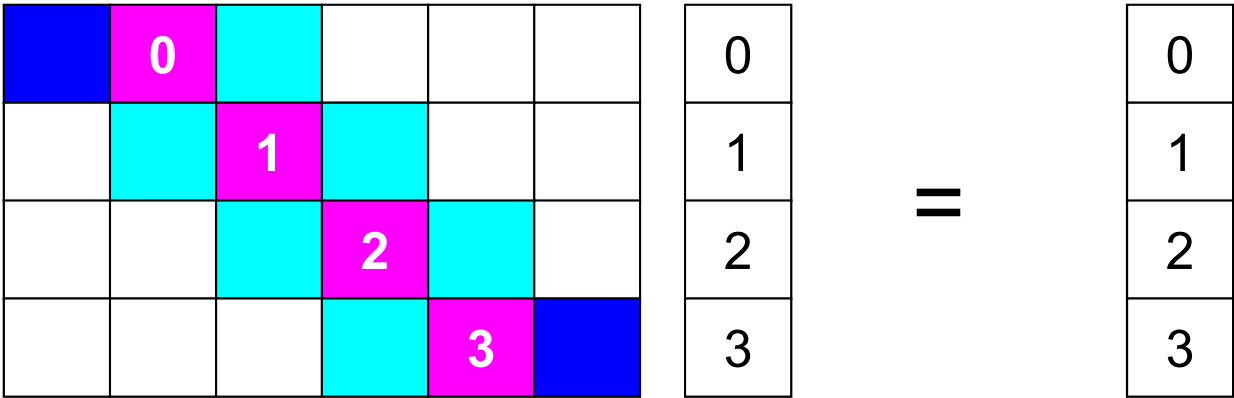

# Mat-Vec Products: Local Op. #2


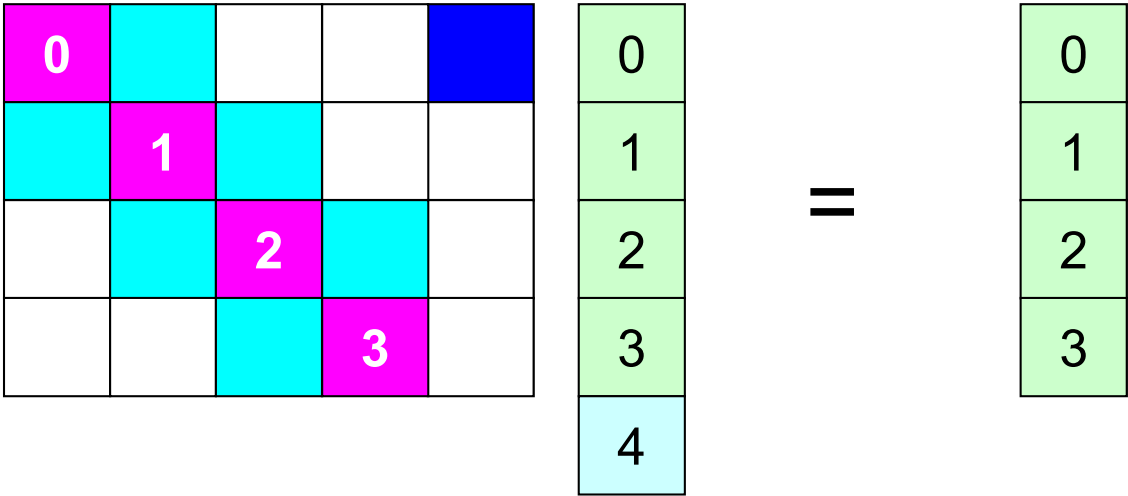
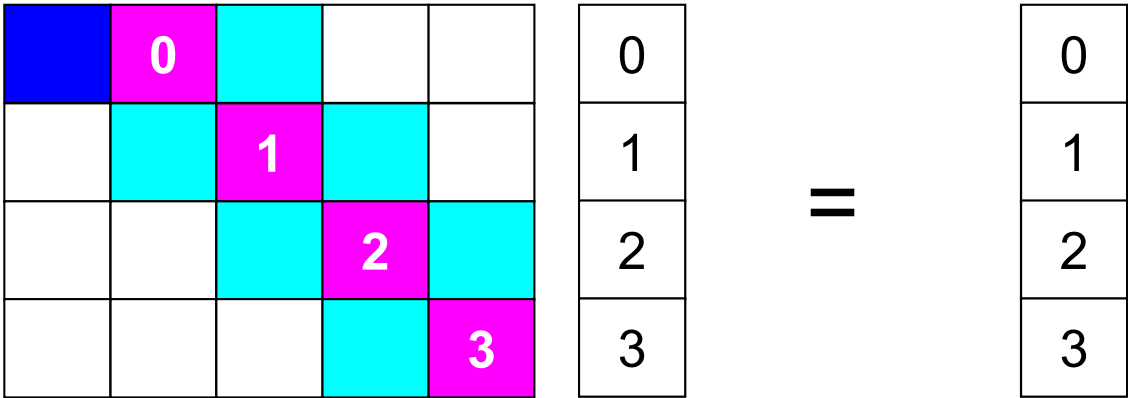


# 1D FEM: 12 nodes/11 elem's/3 domains

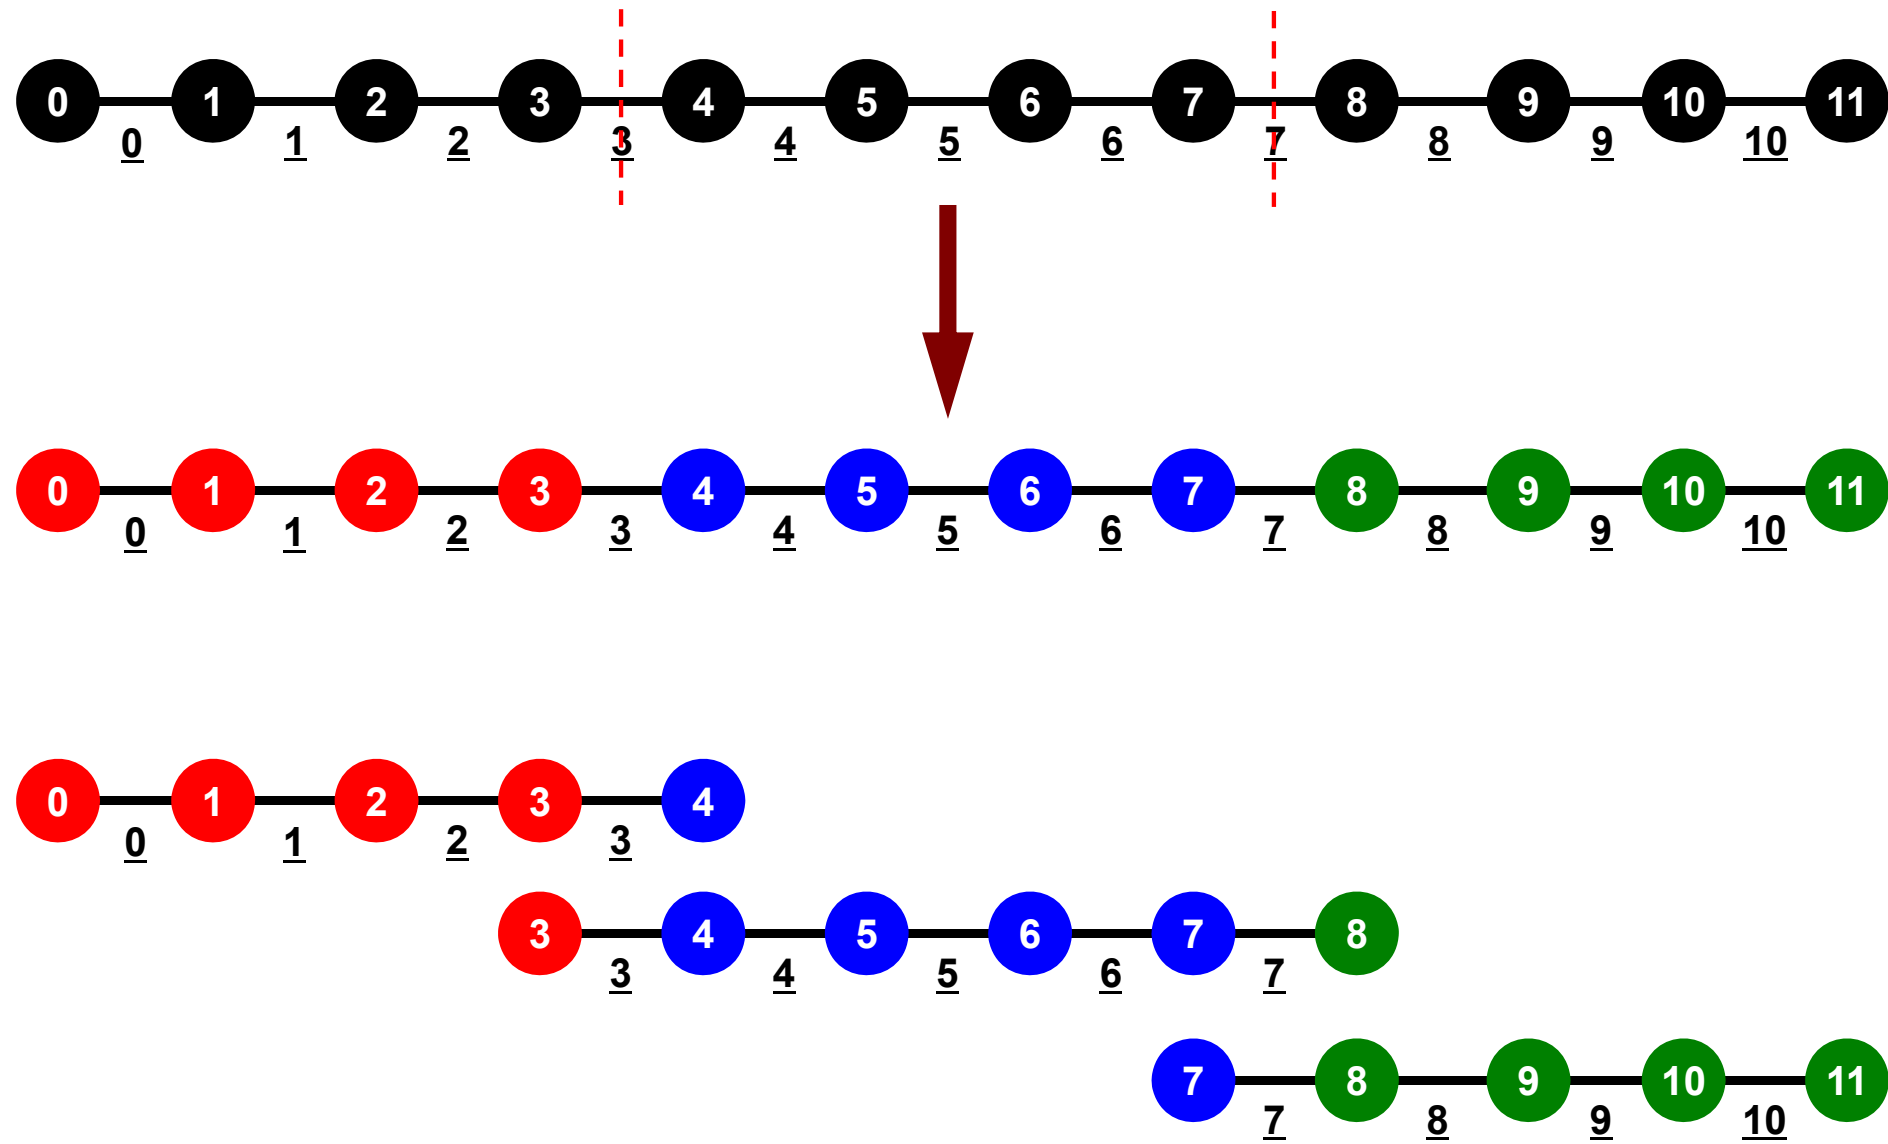


# 1D FEM: 12 nodes/11 elem's/3 domains

Local ID: Starting from 0 for node and elem at each domain




# 1D FEM: 12 nodes/11 elem's/3 domains

Internal/External Nodes

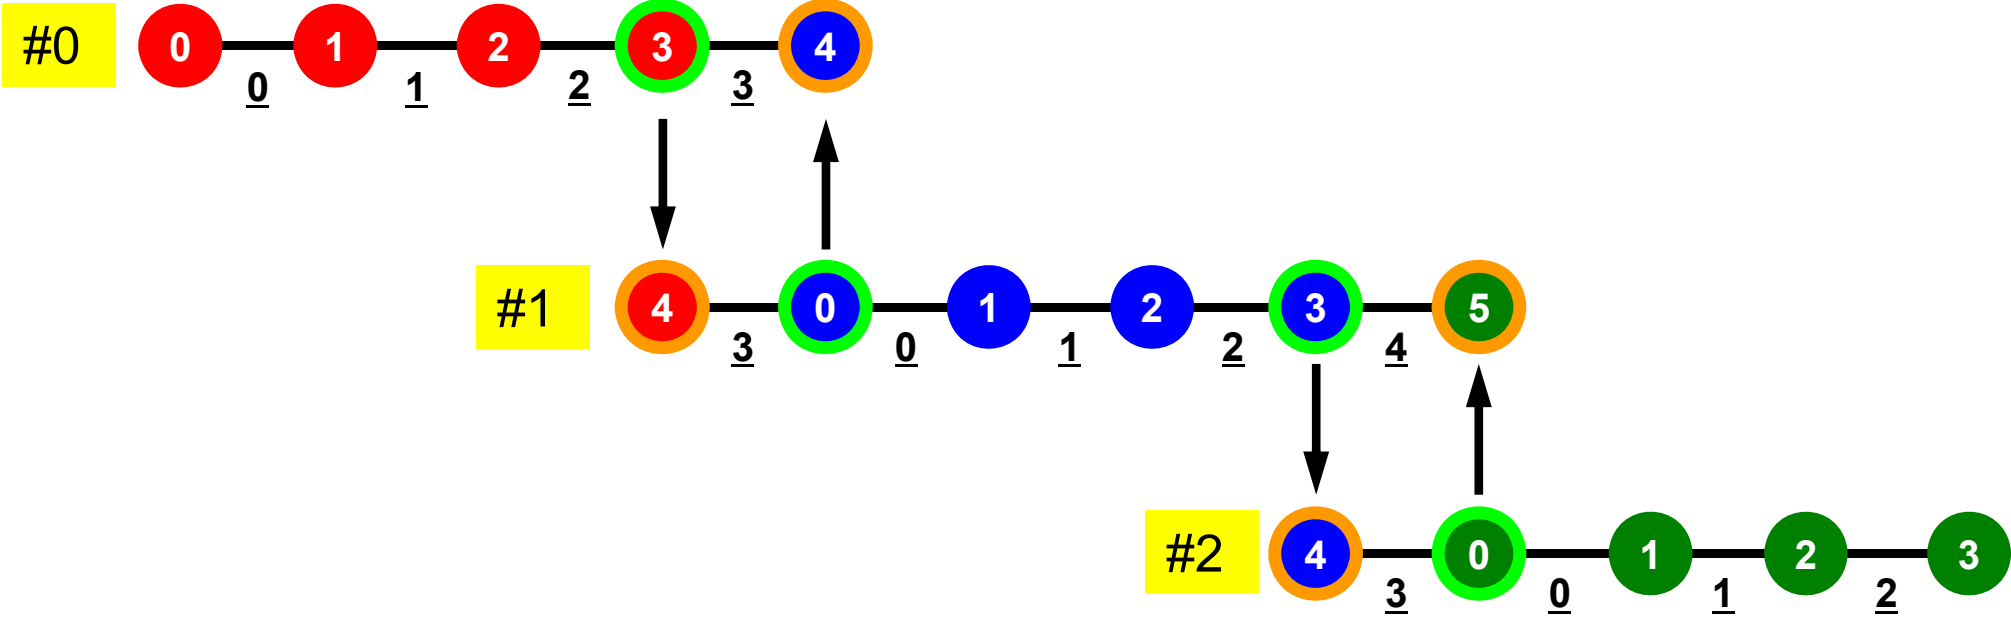

# What is Peer-to-Peer Communication ?

- Collective Communication
  - MPI\_Reduce, MPI\_Scatter/Gather etc.
  - Communications with all processes in the communicator
  - Application Area
    - BEM, Spectral Method, MD: global interactions are considered
    - Dot products, MAX/MIN: Global Summation & Comparison
- Peer-toPeer/Point-to-Point
  - MPI\_Send, MPI\_Receive
  - Communication with limited processes
    - Neighbors
  - Application Area
    - FEM, FDM: Localized Method

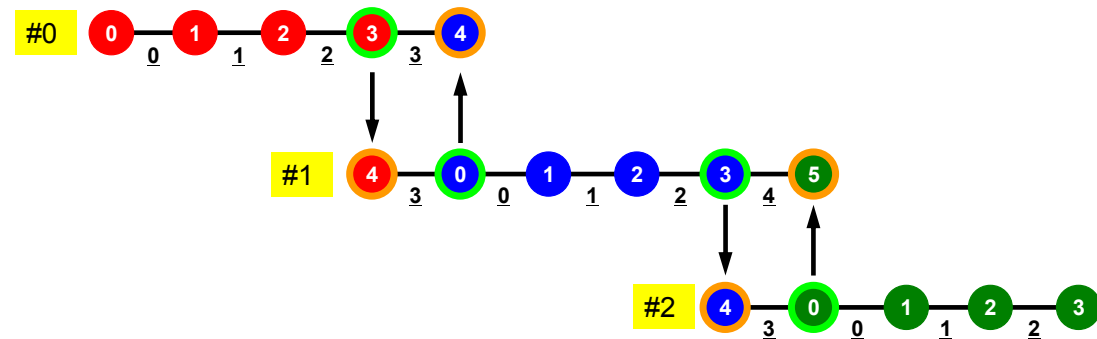





# SEND: sending from boundary nodes

## Send continuous data to send buffer of neighbors

- `MPI_Isend`

`(sendbuf, count, datatype, dest, tag, comm, request)`

- sendbuf    choice    I            starting address of sending buffer
- count       I            I            number of elements sent to each process
- datatype   I            I            data type of elements of sending buffer
- dest         I            I            rank of destination

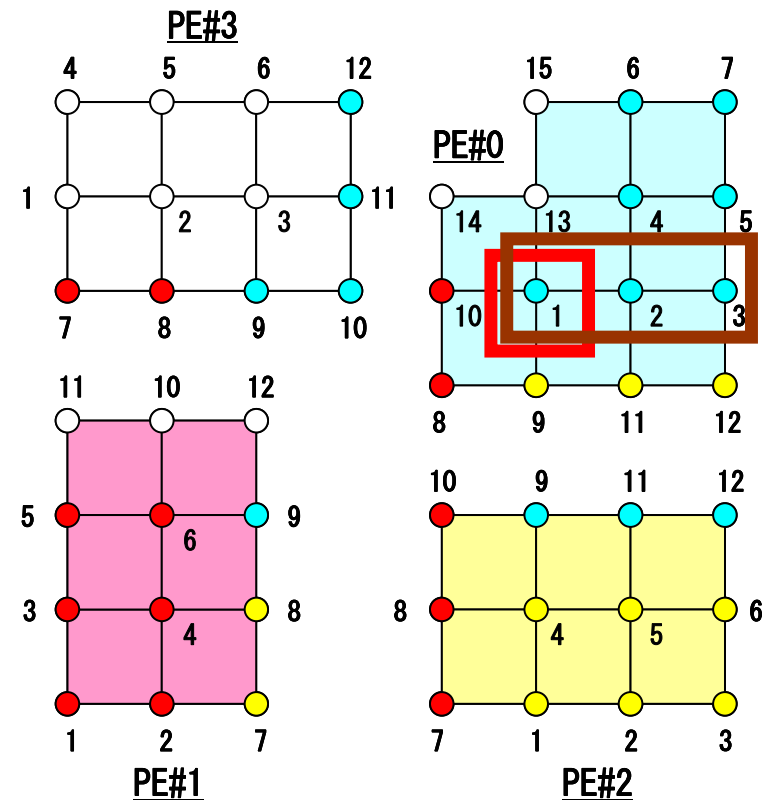



# MPI\_Isend

- Begins a non-blocking send
  - Send the contents of sending buffer (starting from `sendbuf`, number of messages: `count`) to `dest` with `tag` .
  - Contents of sending buffer cannot be modified before calling corresponding `MPI_Waitall`.

- `MPI_Isend`

`( sendbuf , count , datatype , dest , tag , comm , request )`

- sendbuf      choice      I      starting address of sending buffer
- count          int          I      number of elements in sending buffer
- datatype    MPI\_Datatype I      datatype of each sending buffer element
- dest           int          I      rank of destination
- tag            int          I      message tag  
  
This integer can be used by the application to distinguish messages. Communication occurs if `tag`'s of `MPI_Isend` and `MPI_Irecv` are matched. Usually tag is set to be "0" (in this class),
- comm           MPI\_Comm    I      communicator
- request       MPI\_Request O      communication request array used in `MPI_Waitall`


# RECV: receiving to external nodes

Recv. continuous data to recv. buffer from neighbors

- `MPI_Irecv`

`(recvbuf, count, datatype, dest, tag, comm, request)`

- recvbuf    choice    I            starting address of receiving buffer
- count       I            I            number of elements in receiving buffer
- datatype   I            I            data type of elements of receiving buffer
- source       I            I            rank of source

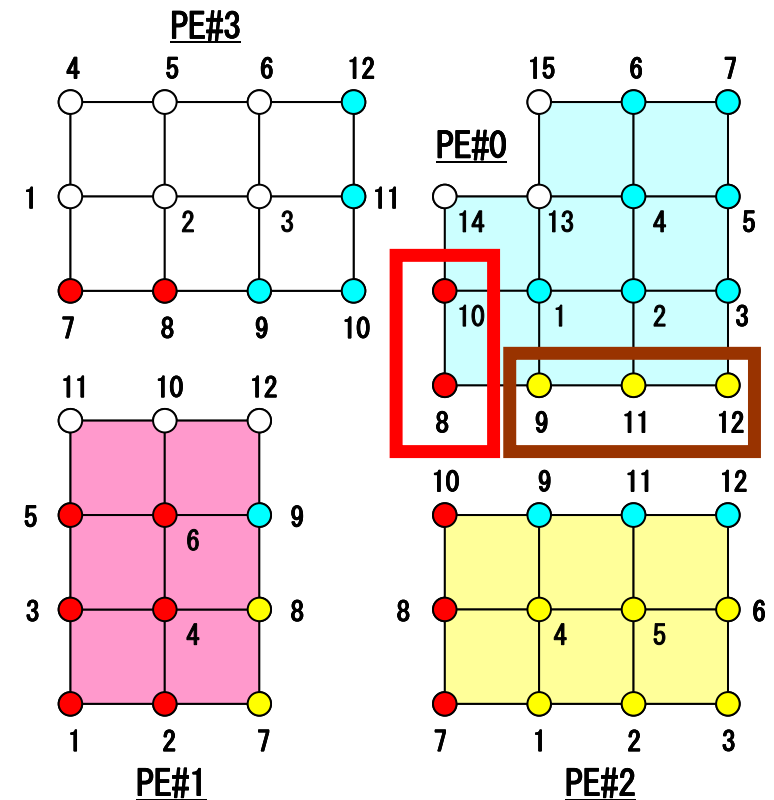



# MPI\_Irecv

- Begins a non-blocking receive
  - Receiving the contents of receiving buffer (starting from `recvbuf`, number of messages: `count`) from `source` with `tag` .
  - Contents of receiving buffer cannot be used before calling corresponding `MPI_Waitall`.

- `MPI_Irecv`

`(recvbuf, count, datatype, source, tag, comm, request)`

- `recvbuf`      choice      I      starting address of receiving buffer
- `count`        int         I      number of elements in receiving buffer
- `datatype`    MPI\_Datatype I      datatype of each receiving buffer element
- `source`       int         I      rank of source
- `tag`           int         I      message tag  
  
This integer can be used by the application to distinguish messages. Communication occurs if `tag`'s of `MPI_Isend` and `MPI_Irecv` are matched. Usually tag is set to be "0" (in this class),
- `comm`         MPI\_Comm    I      communicator
- `request`      MPI\_Request O      communication request array used in `MPI_Waitall`





# MPI\_Waitall

- `MPI_Waitall` blocks until all comm's, associated with request in the array, complete. It is used for synchronizing MPI\_Isend and MPI\_Irecv in this class.
- At sending phase, contents of sending buffer cannot be modified before calling corresponding `MPI_Waitall`. At receiving phase, contents of receiving buffer cannot be used before calling corresponding `MPI_Waitall`.
- MPI\_Isend and MPI\_Irecv can be synchronized simultaneously with a single `MPI_Waitall` if it is consistent.
  - Same request should be used in MPI\_Isend and MPI\_Irecv.
- Its operation is similar to that of `MPI_Barrier` but, `MPI_Waitall` can not be replaced by `MPI_Barrier`.
  - Possible troubles using `MPI_Barrier` instead of `MPI_Waitall`: Contents of request and status are not updated properly, very slow operations etc.
- `MPI_Waitall (count, request, status)`
  - count      int      I      number of processes to be synchronized
  - request    MPI\_Request   I / O      comm. request used in `MPI_Waitall` (array size: count)
  - status     MPI\_Status   O      array of status objects


MPI\_STATUS\_SIZE: defined in 'mpif.h', 'mpi.h'

# Node-based Partitioning

internal nodes - elements - external nodes

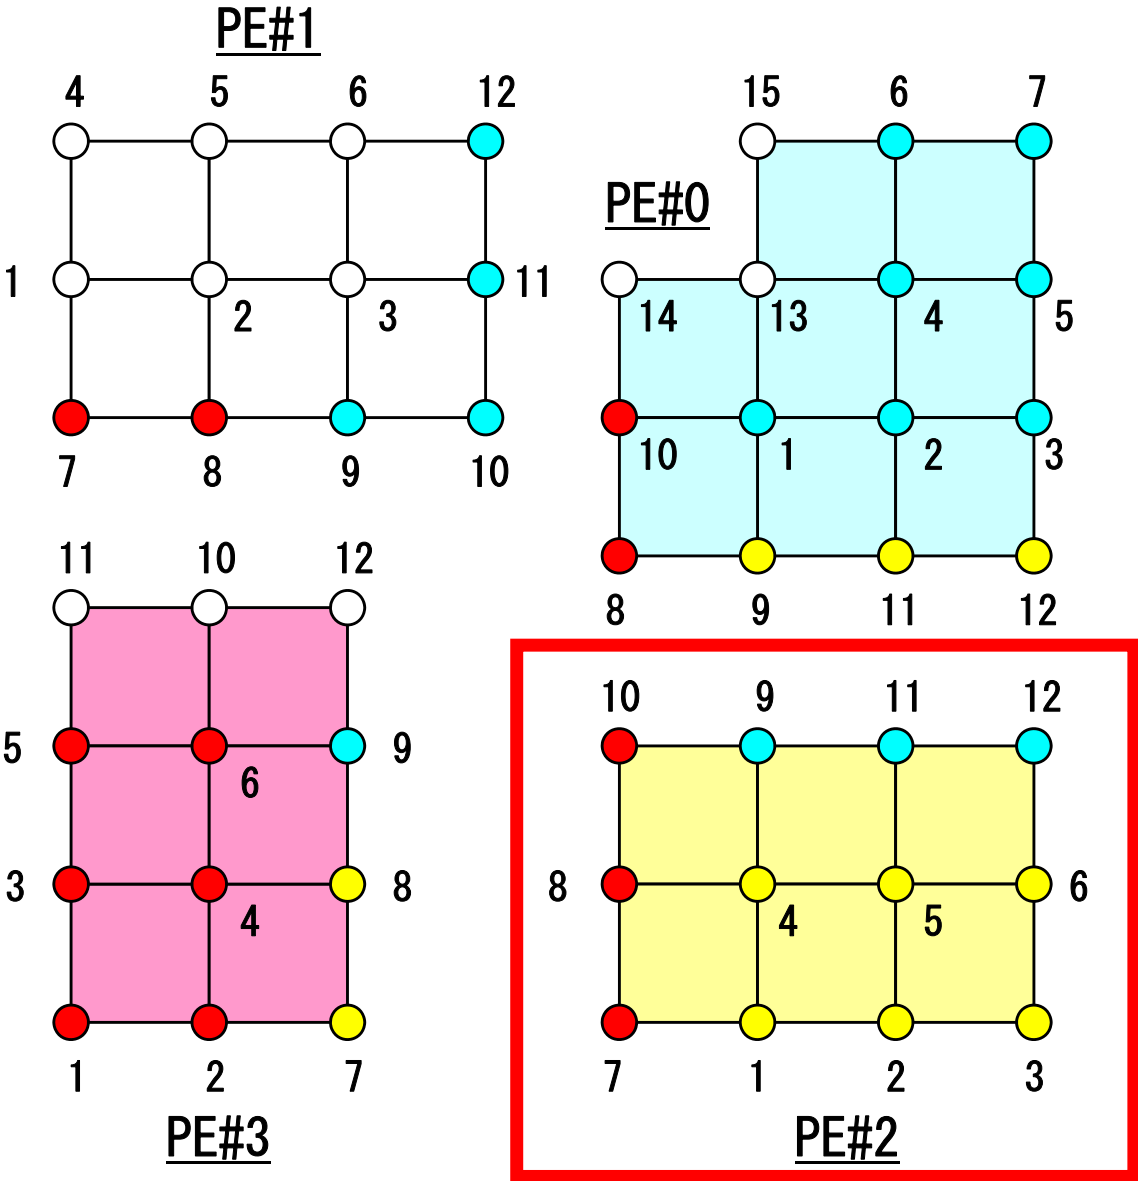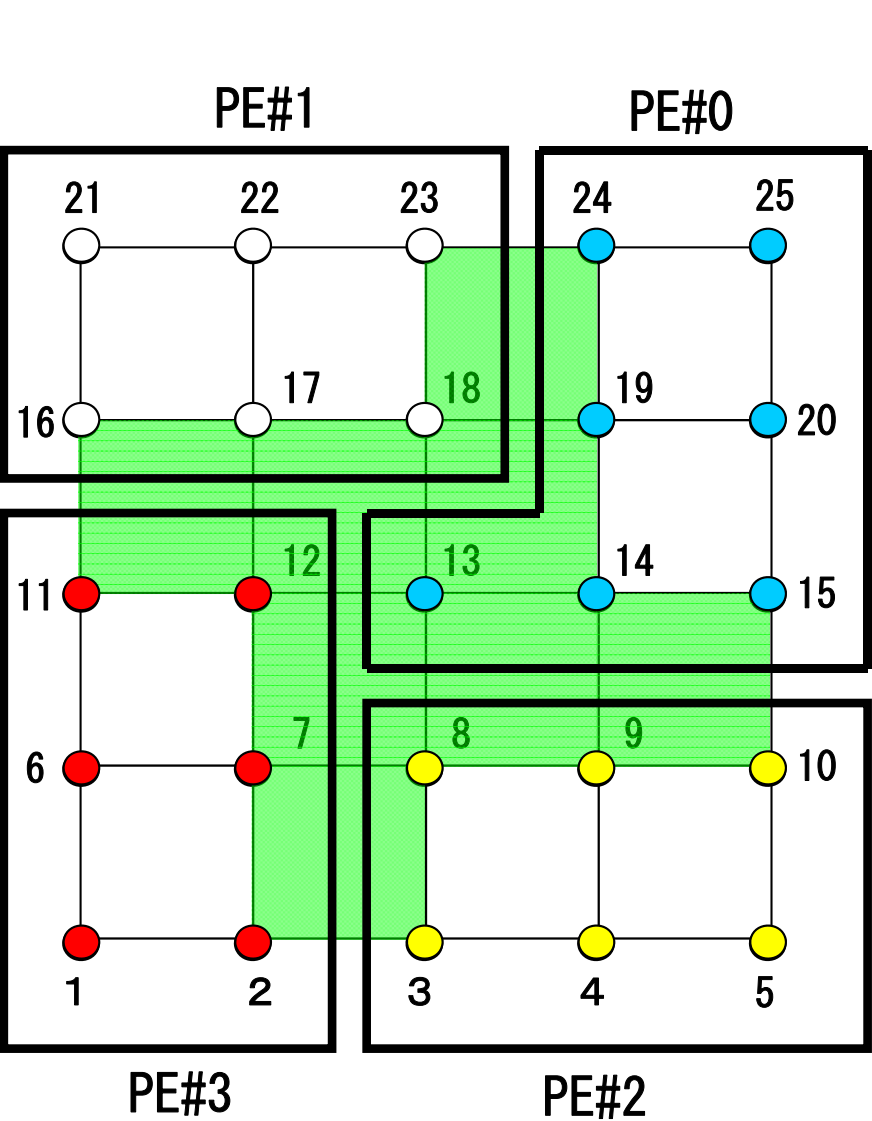


# Description of Distributed Local Data

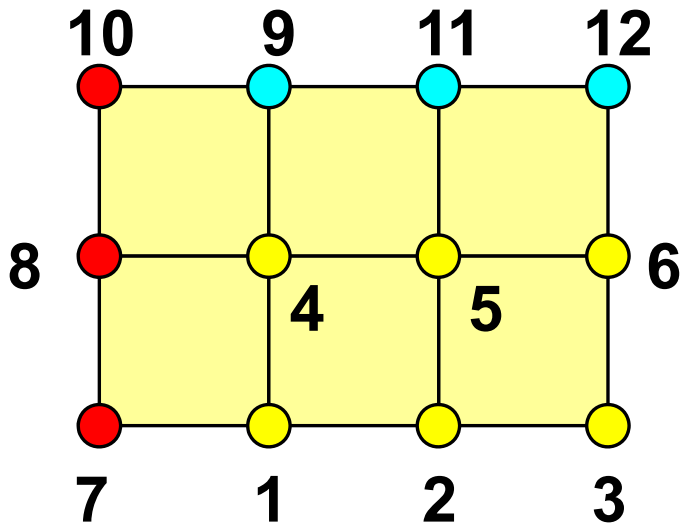

- Internal/External Points
  - Numbering: Starting from internal pts, then external pts after that
- Neighbors
  - Shares overlapped meshes
  - Number and ID of neighbors
- External Points
  - From where, how many, and which external points are received/imported ?
- Boundary Points
  - To where, how many and which boundary points are sent/exported ?


# External Nodes (外点) : RECEIVE

PE#2 : receive information for “external nodes”

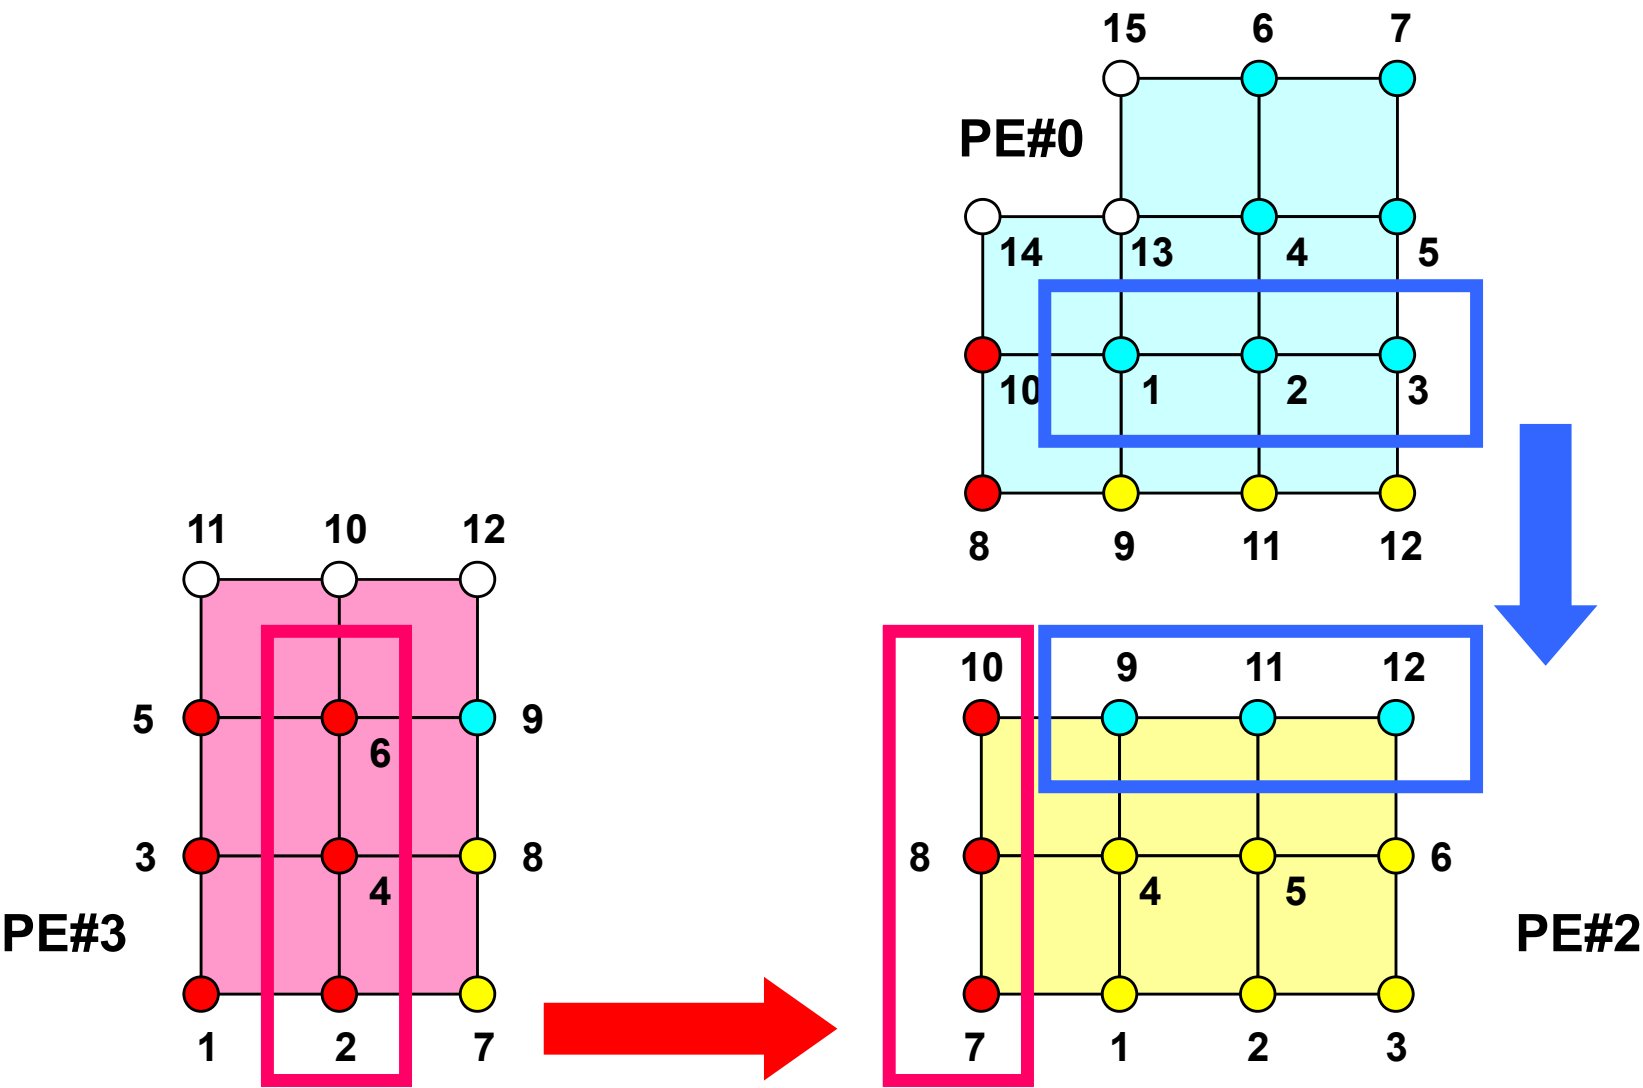



PE#2 : send information on “boundary nodes”

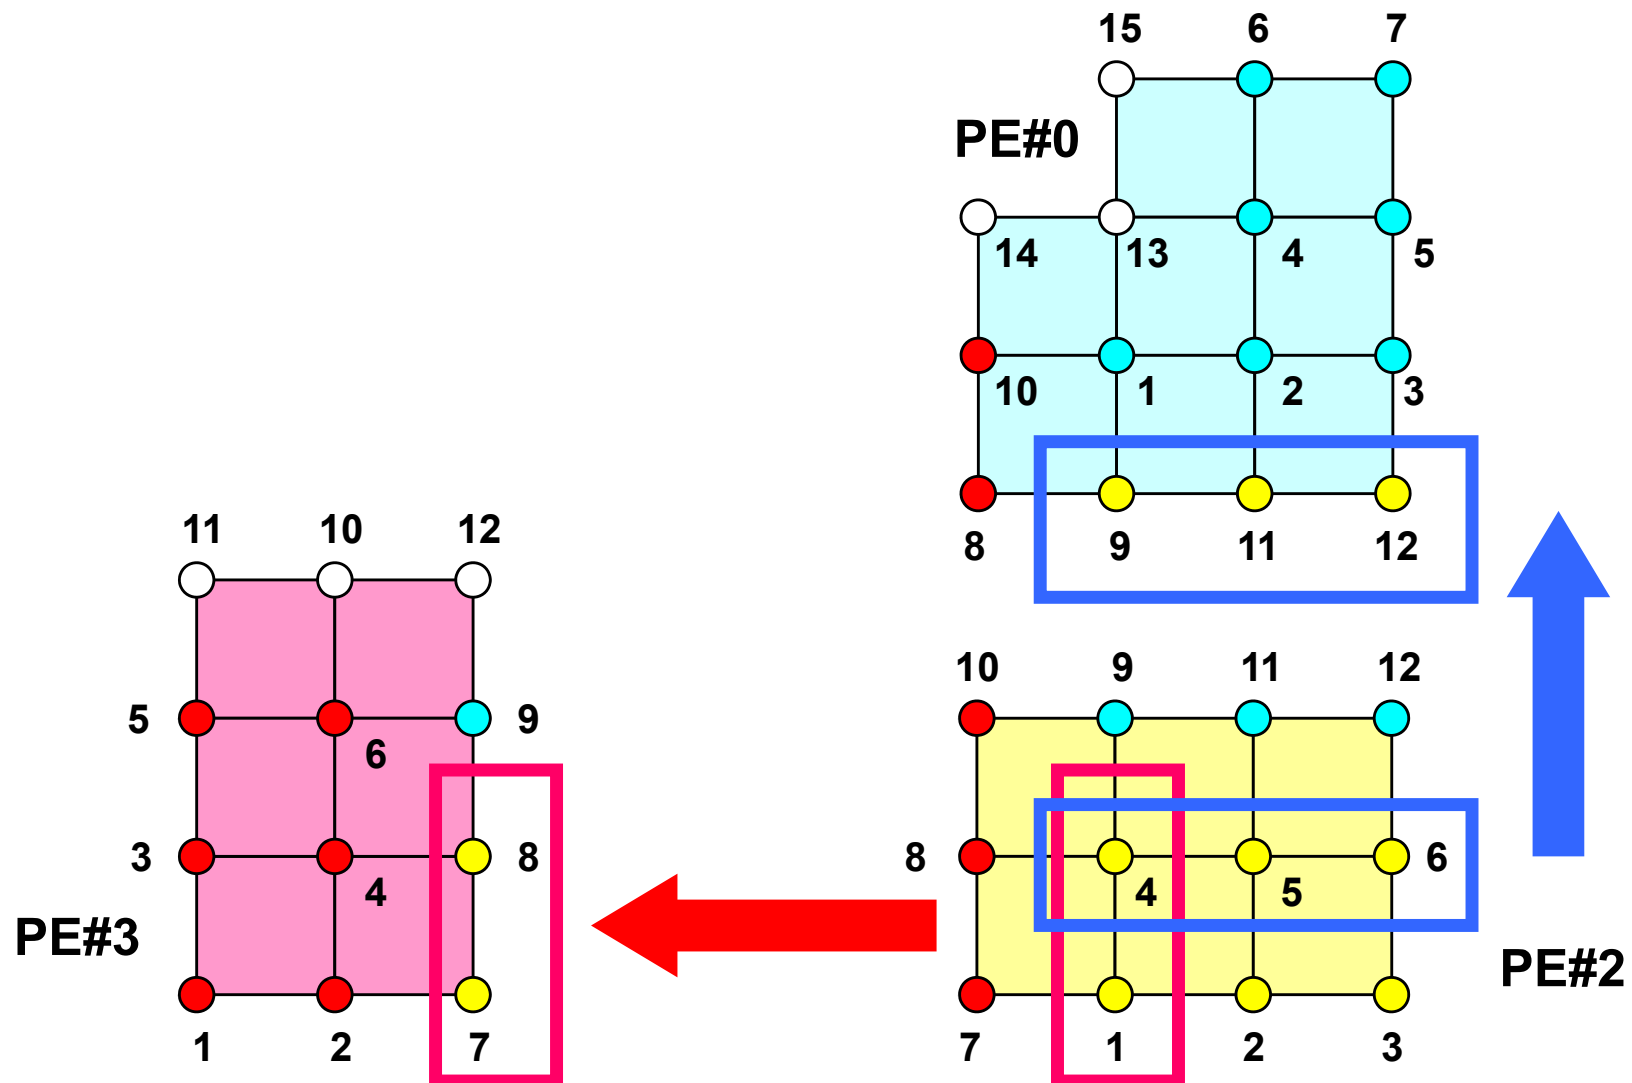

# Distributed Local Data Structure for Parallel Computation

- Distributed local data structure for domain-to-domain communications has been introduced, which is appropriate for such applications with sparse coefficient matrices (e.g. FDM, FEM, FVM etc.).
  - SPMD
  - Local Numbering: Internal pts to External pts
  - Generalized communication table
- Everything is easy, if proper data structure is defined:
  - Values at boundary pts are copied into sending buffers
  - Send/Recv
  - Values at external pts are updated through receiving buffers