


# **3D-FEM in Fortran**

# **Steady State Heat Conduction**

Kengo Nakajima  
RIKEN R-CCS

# 3D Steady-State Heat Conduction


$$\frac{\partial}{\partial x} \left( \lambda \frac{\partial T}{\partial x} \right) + \frac{\partial}{\partial y} \left( \lambda \frac{\partial T}{\partial y} \right) + \frac{\partial}{\partial z} \left( \lambda \frac{\partial T}{\partial z} \right) + \dot{Q}(x, y, z) = 0$$

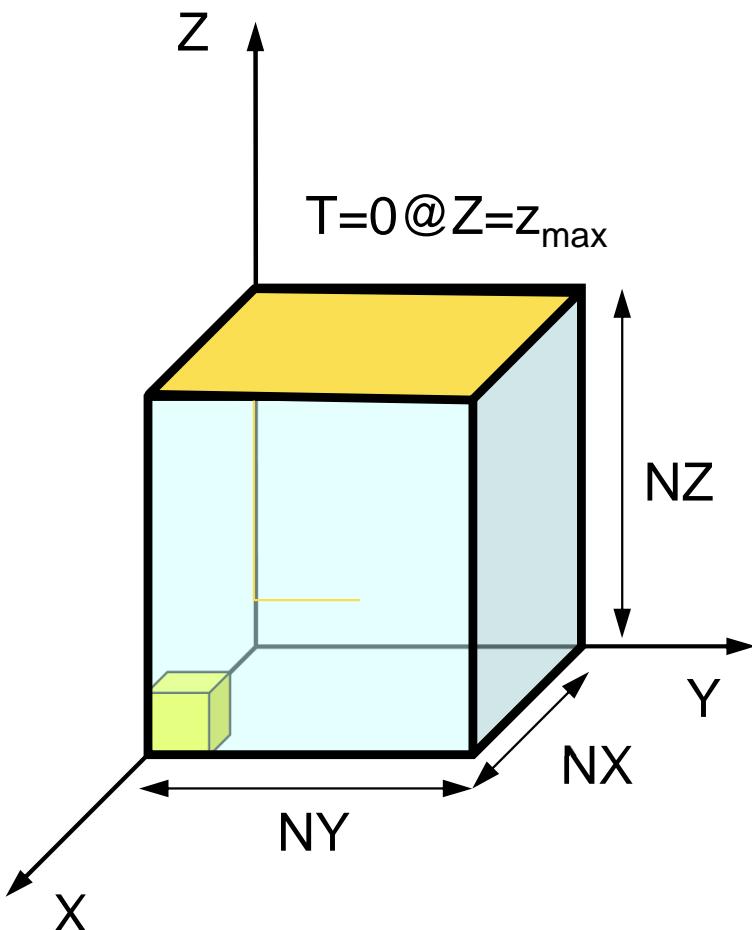

- Heat Generation
- Uniform thermal conductivity  $\lambda$
- HEX meshes
  - 1x1x1 cubes
  - $NX$ ,  $NY$ ,  $NZ$  cubes in each direction
- Boundary Conditions
  - $T=0 @ Z=z_{max}$
- Heat Gen. Rate is a function of location (cell center:  $x_c, y_c$ )
  - $\dot{Q}(x, y, z) = QVOL|x_c + y_c|$

# 3D Steady-State Heat Conduction

$$\frac{\partial}{\partial x} \left( \lambda \frac{\partial T}{\partial x} \right) + \frac{\partial}{\partial y} \left( \lambda \frac{\partial T}{\partial y} \right) + \frac{\partial}{\partial z} \left( \lambda \frac{\partial T}{\partial z} \right) + \dot{Q}(x, y, z) = 0$$

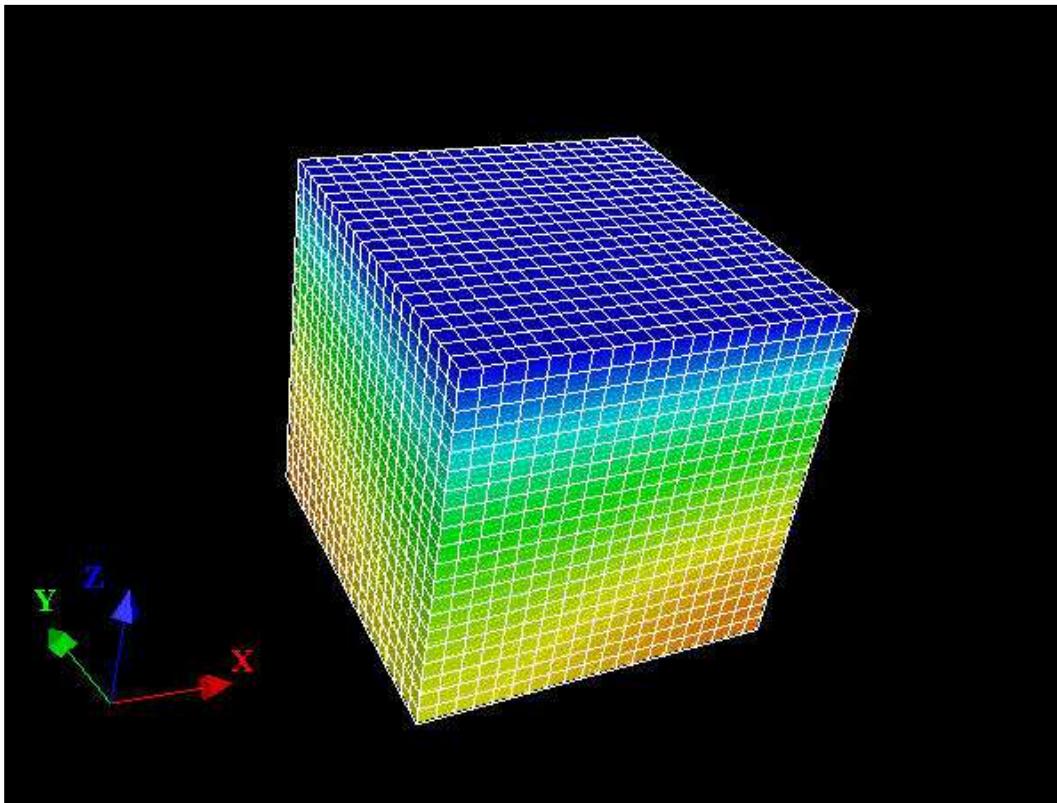

- Higher temperature at nodes far from the origin.
- Heat Gen. Rate is a function of location (cell center:  $x_c, y_c$ )

$$\dot{Q}(x, y, z) = |x_c + y_c|$$

movie

# Finite-Element Procedures

- Governing Equations
- Galerkin Method: Weak Form
- Element-by-Element Integration
  - Element Matrix
- Global Matrix
- Boundary Conditions
- Linear Solver

# FEM Procedures: Program



- Initialization
  - Control Data
  - Node, Connectivity of Elements (N: Node#, NE: Elem#)
  - Initialization of Arrays (Global/Element Matrices)
  - Element-Global Matrix Mapping (Index, Item)
- Generation of Matrix
  - Element-by-Element Operations (do  $icel = 1, NE$ )
    - Element matrices
    - Accumulation to global matrix
  - Boundary Conditions
- Linear Solver
  - Conjugate Gradient Method

- Formulation of 3D Element
- 3D Heat Equations
  - Galerkin Method
  - Element Matrices
- Running the Code
- Data Structure
- Overview of the Program

# Extension to 2D Prob.: Triangles

三角形要素


- Triangles can handle arbitrarily shaped object
- “Linear” triangular elements provide low accuracy, therefore they are not used in practical applications.

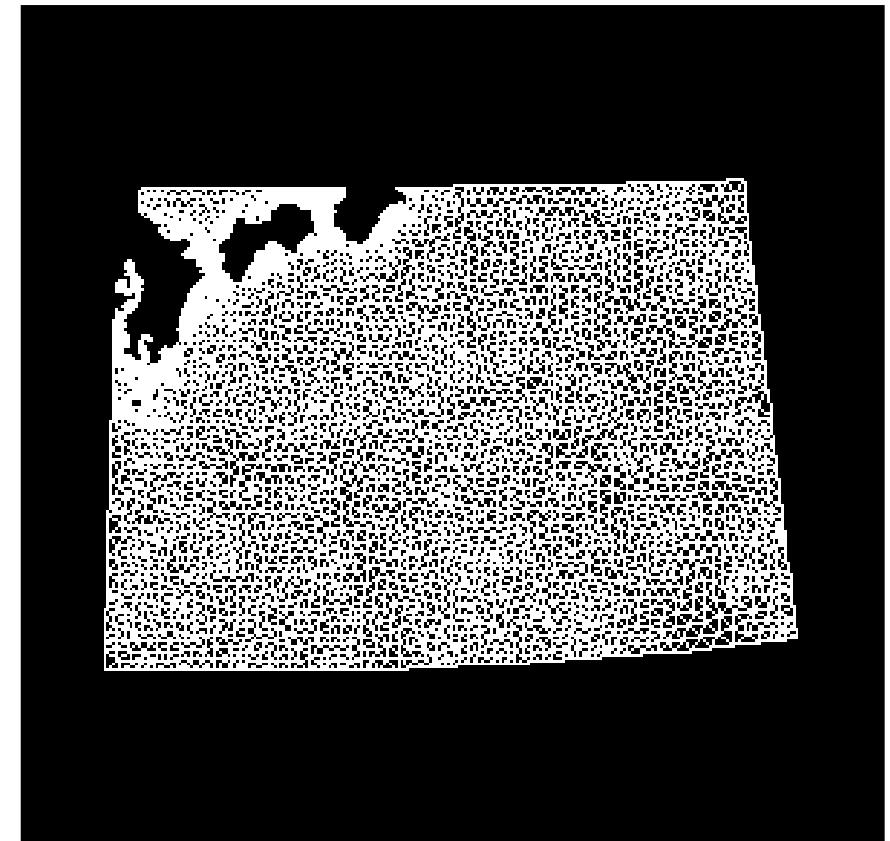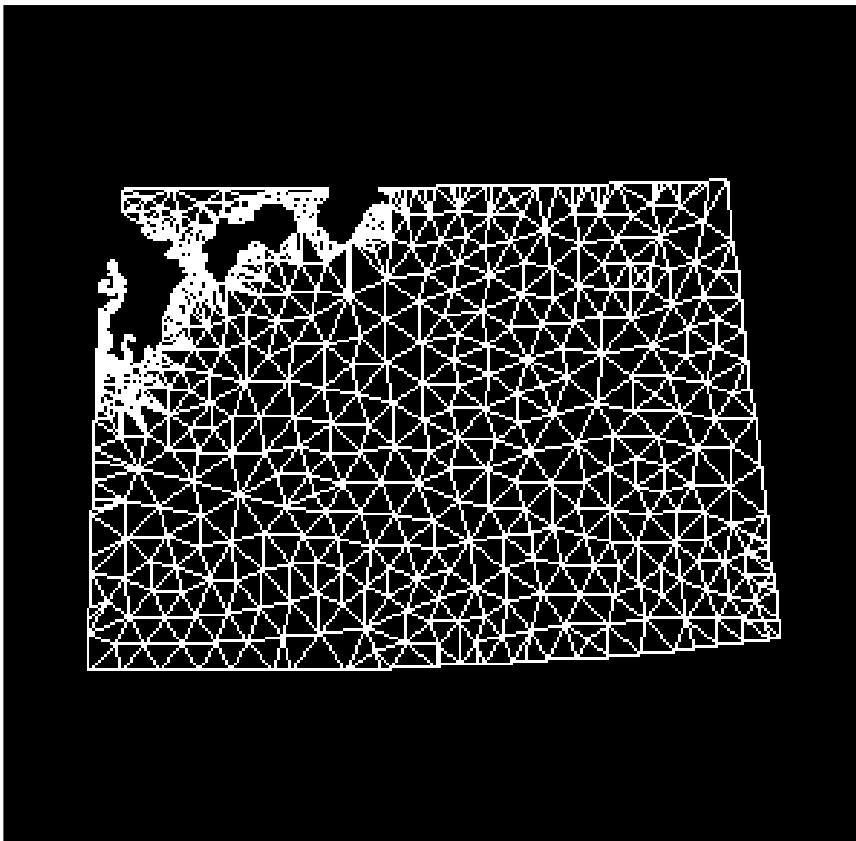

# Extension to 2D Prob.: Quadrilaterals

## 四角形要素

- Formulation of quad. elements is possible if same shape functions in 1D elements are applied along X- and Y- axis.
  - More accurate than triangles
- Each edge must be “parallel” with X- and Y- axis.
  - Similar to FDM

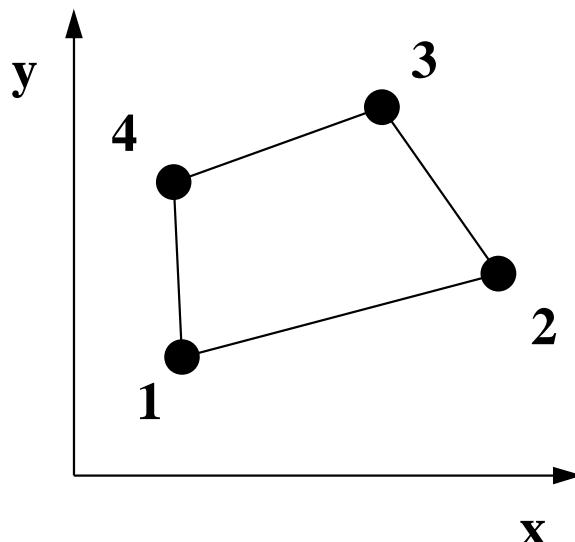


- This type of elements cannot be considered.

# Natural/Local/Element Coordinate (1/2)

自然/局所/要素座標系


- Each element is mapped to square element  $[\pm 1, \pm 1]$  on natural/local/element coordinate  $(\xi, \eta)$

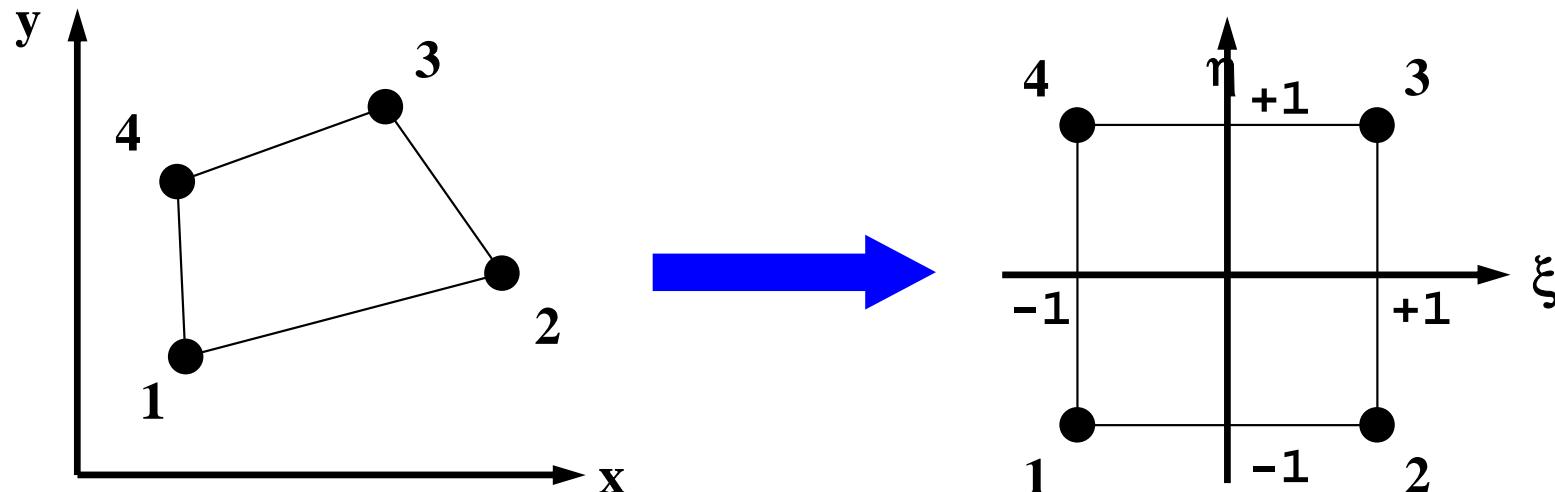

- Components of global coordinate system of each node  $(x, y)$  for certain kinds of elements are defined by shape functions  $[N]$  on natural/local coordinate system, where shape functions  $[N]$  are also used for interpolation of dependent variables.

# Natural/Local/Element Coordinate (2/2)

自然/局所/要素座標系

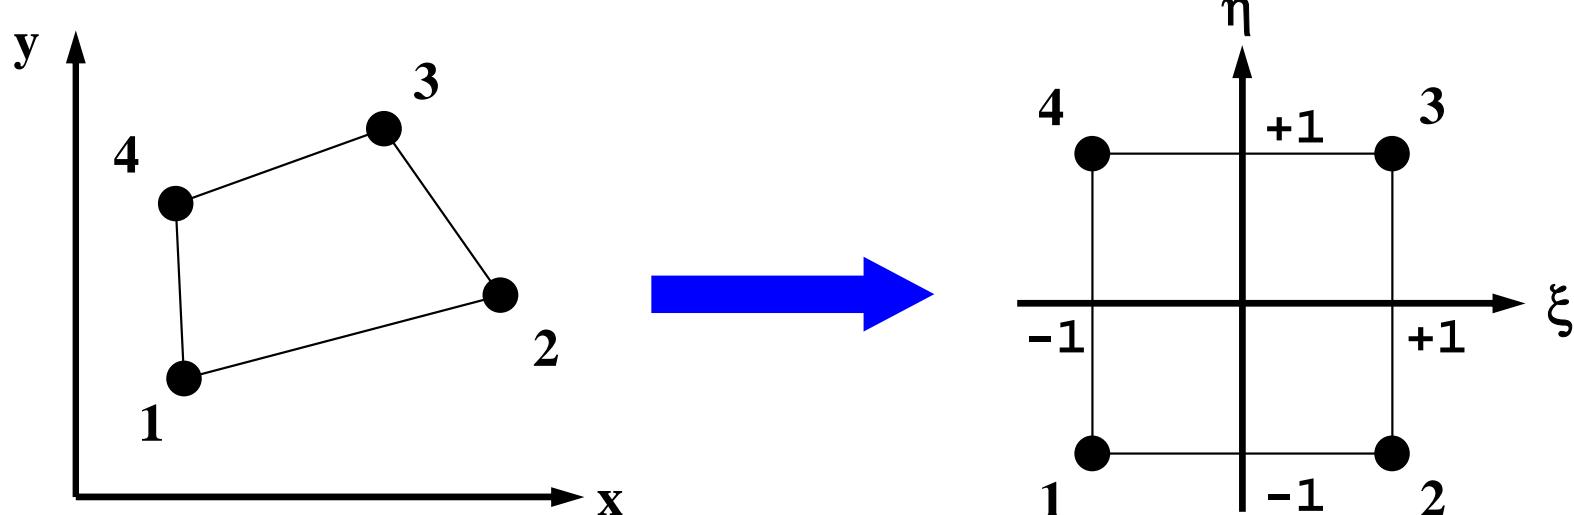


- Coordinate of each node:  $(x_1, y_1), (x_2, y_2), (x_3, y_3), (x_4, y_4)$
- Temperature at each node:  $T_1, T_2, T_3, T_4$

$$T = \sum_{i=1}^4 N_i(\xi, \eta) \cdot T_i, \quad x = \sum_{i=1}^4 N_i(\xi, \eta) \cdot x_i, \quad y = \sum_{i=1}^4 N_i(\xi, \eta) \cdot y_i$$

- Isoparametric Elements:  $N_i$  for  $(x_i, y_i)$  and  $N_i$  for  $T_i$  are same

# Isoparametric Element

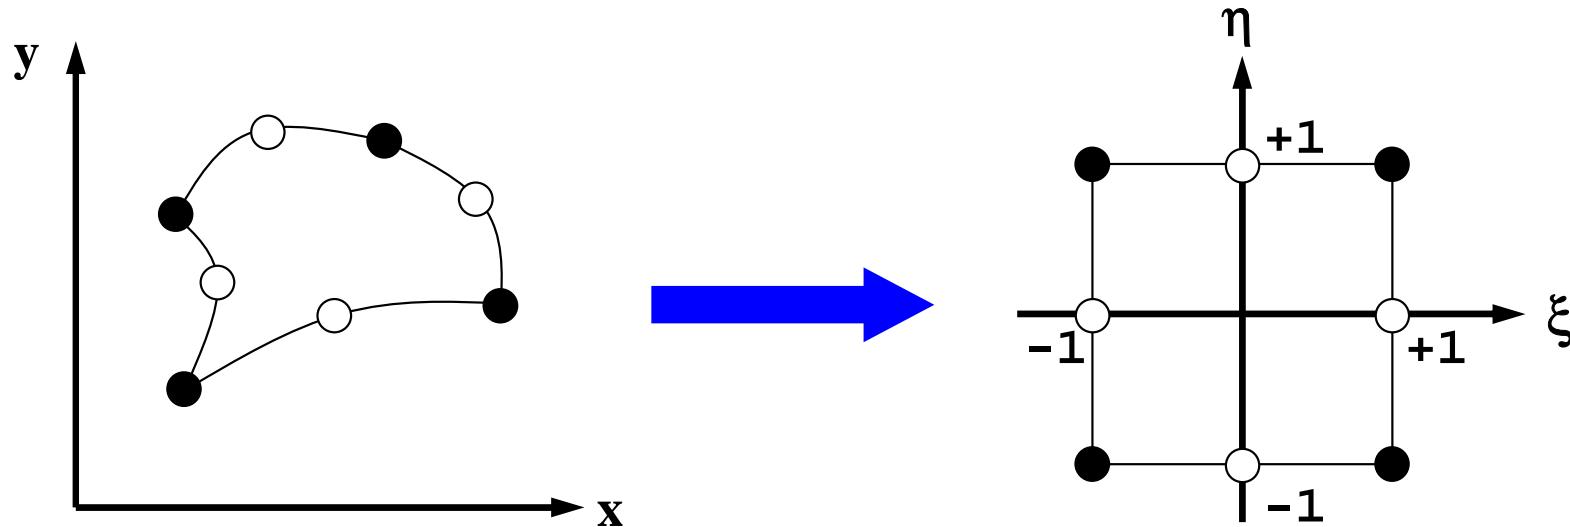


- Higher-order shape function can handle curved lines/surfaces.
- “Natural” coordinate system
- Super-Parametric: Higher-Order  $N_i$  for  $(x,y)$
- Sub-Parametric: Lower-Order  $N_i$  for  $(x,y)$

# Shape Fn's on 2D Natural Coord. (1/3)

- Polynomial shape functions on squares of natural coordinate:

$$T = \alpha_1 + \alpha_2 \xi + \alpha_3 \eta + \alpha_4 \xi \eta$$

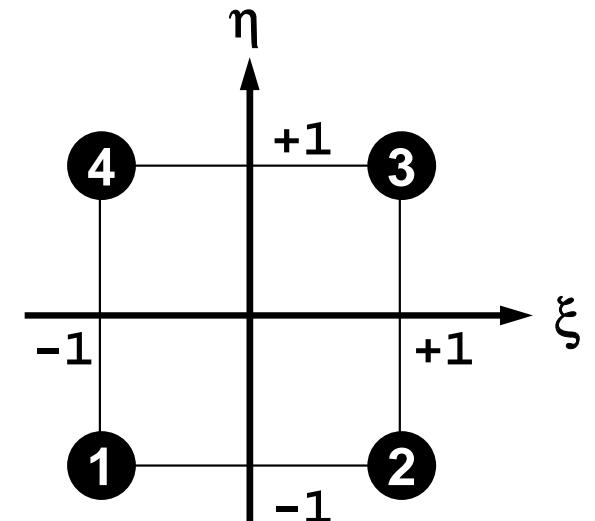


- Coefficients are calculated as follows:

$$\alpha_1 = \frac{T_1 + T_2 + T_3 + T_4}{4}, \quad \alpha_2 = \frac{-T_1 + T_2 + T_3 - T_4}{4},$$

$$\alpha_3 = \frac{-T_1 - T_2 + T_3 + T_4}{4}, \quad \alpha_4 = \frac{T_1 - T_2 + T_3 - T_4}{4}$$

# Shape Fn's on 2D Natural Coord. (2/3)

$$\begin{aligned}
 T &= \alpha_1 + \alpha_2 \xi + \alpha_3 \eta + \alpha_4 \xi \eta \\
 &= \frac{T_1 + T_2 + T_3 + T_4}{4} + \frac{-T_1 + T_2 + T_3 - T_4}{4} \xi + \\
 &\quad \frac{-T_1 - T_2 + T_3 + T_4}{4} \eta + \frac{T_1 - T_2 + T_3 - T_4}{4} \xi \eta \\
 &= \frac{1}{4} (1 - \xi - \eta + \xi \eta) T_1 + \frac{1}{4} (1 + \xi - \eta - \xi \eta) T_2 + \\
 &\quad \frac{1}{4} (1 + \xi + \eta + \xi \eta) T_3 + \frac{1}{4} (1 - \xi + \eta - \xi \eta) T_4 \\
 &= \frac{1}{4} (1 - \xi)(1 - \eta) T_1 + \frac{1}{4} (1 + \xi)(1 - \eta) T_2 + \\
 &\quad \frac{1}{4} (1 + \xi)(1 + \eta) T_3 + \frac{1}{4} (1 - \xi)(1 + \eta) T_4
 \end{aligned}$$

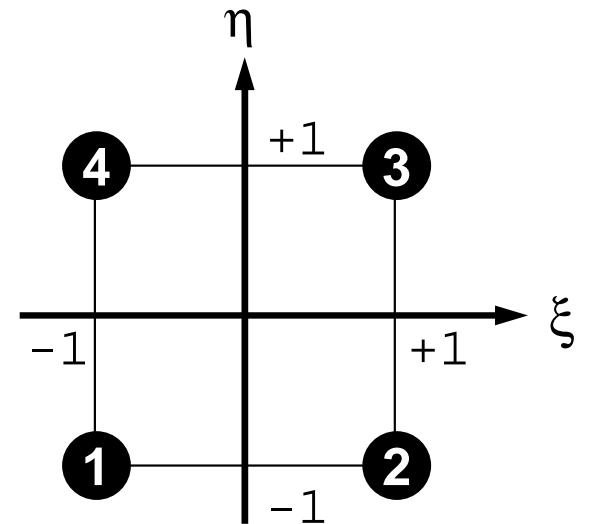


# Shape Fn's on 2D Natural Coord. (2/3)

$$\begin{aligned}
 T &= \alpha_1 + \alpha_2 \xi + \alpha_3 \eta + \alpha_4 \xi \eta \\
 &= \frac{T_1 + T_2 + T_3 + T_4}{4} + \frac{-T_1 + T_2 + T_3 - T_4}{4} \xi + \\
 &\quad \frac{-T_1 - T_2 + T_3 + T_4}{4} \eta + \frac{T_1 - T_2 + T_3 - T_4}{4} \xi \eta \\
 &= \frac{1}{4} (1 - \xi - \eta + \xi \eta) T_1 + \frac{1}{4} (1 + \xi - \eta - \xi \eta) T_2 + \\
 &\quad \frac{1}{4} (1 + \xi + \eta + \xi \eta) T_3 + \frac{1}{4} (1 - \xi + \eta - \xi \eta) T_4
 \end{aligned}$$

$$N_1 = \boxed{\frac{1}{4} (1 - \xi)(1 - \eta)} T_1 + \boxed{\frac{1}{4} (1 + \xi)(1 - \eta)} T_2 + N_2$$

$$N_3 = \boxed{\frac{1}{4} (1 + \xi)(1 + \eta)} T_3 + \boxed{\frac{1}{4} (1 - \xi)(1 + \eta)} T_4 N_4$$

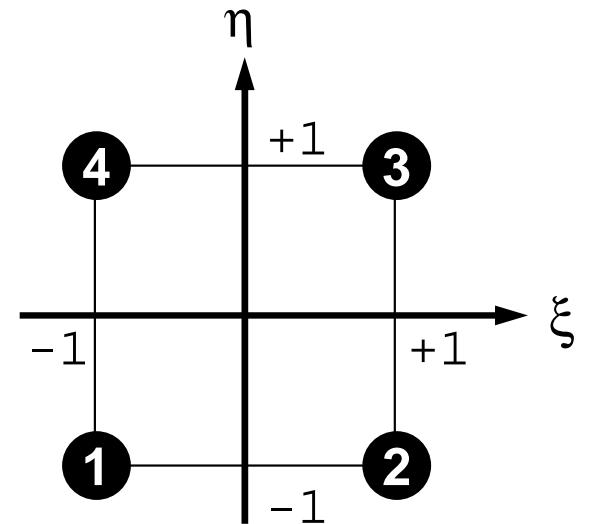

# Shape Fn's on 2D Natural Coord. (3/3)

- $T$  is defined as follows according to  $T_i$  :


$$T = N_1 T_1 + N_2 T_2 + N_3 T_3 + N_4 T_4$$

- Shape functions  $N_i$  :

$$N_1(\xi, \eta) = \frac{1}{4}(1-\xi)(1-\eta), \quad N_2(\xi, \eta) = \frac{1}{4}(1+\xi)(1-\eta),$$

$$N_3(\xi, \eta) = \frac{1}{4}(1+\xi)(1+\eta), \quad N_4(\xi, \eta) = \frac{1}{4}(1-\xi)(1+\eta)$$

- Also known as “bi-linear” interpolation
- Calculate  $N_i$  at each node

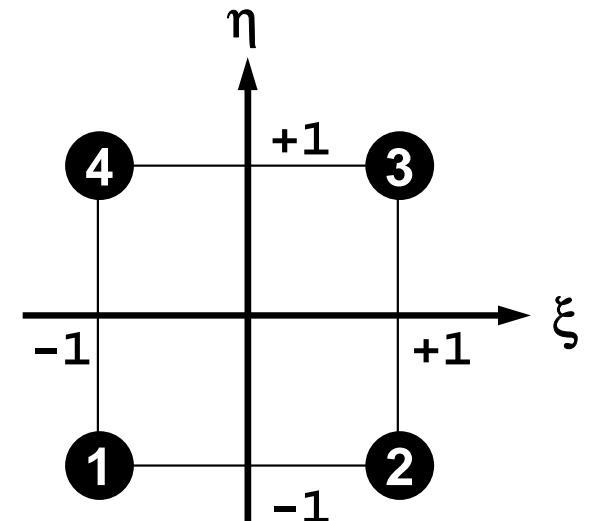

# Extension to 3D Problems

- Tetrahedron/Tetrahedra (四面体) : Triangles in 2D
  - can handle arbitrary shape objects
  - Linear elements are generally less accurate, not practical
  - Higher-order tetrahedral elements are widely used.
- In this class, “tri-linear” hexahedral elements (isoparametric) are used (六面体要素)

# Shape Fn's: 3D Natural/Local Coord.

$$N_1(\xi, \eta, \zeta) = \frac{1}{8}(1-\xi)(1-\eta)(1-\zeta)$$

$$N_5(\xi, \eta, \zeta) = \frac{1}{8}(1-\xi)(1-\eta)(1+\zeta)$$

$$N_2(\xi, \eta, \zeta) = \frac{1}{8}(1+\xi)(1-\eta)(1-\zeta)$$

$$N_6(\xi, \eta, \zeta) = \frac{1}{8}(1+\xi)(1-\eta)(1+\zeta)$$

$$N_3(\xi, \eta, \zeta) = \frac{1}{8}(1+\xi)(1+\eta)(1-\zeta)$$

$$N_7(\xi, \eta, \zeta) = \frac{1}{8}(1+\xi)(1+\eta)(1+\zeta)$$


$$N_4(\xi, \eta, \zeta) = \frac{1}{8}(1-\xi)(1+\eta)(1-\zeta)$$

$$N_8(\xi, \eta, \zeta) = \frac{1}{8}(1-\xi)(1+\eta)(1+\zeta)$$

$$x = \sum_{i=1}^8 N_i(\xi, \eta, \zeta) \cdot x_i, \quad T = \sum_{i=1}^8 N_i(\xi, \eta, \zeta) \cdot T_i$$

$$y = \sum_{i=1}^8 N_i(\xi, \eta, \zeta) \cdot y_i$$

$$z = \sum_{i=1}^8 N_i(\xi, \eta, \zeta) \cdot z_i$$

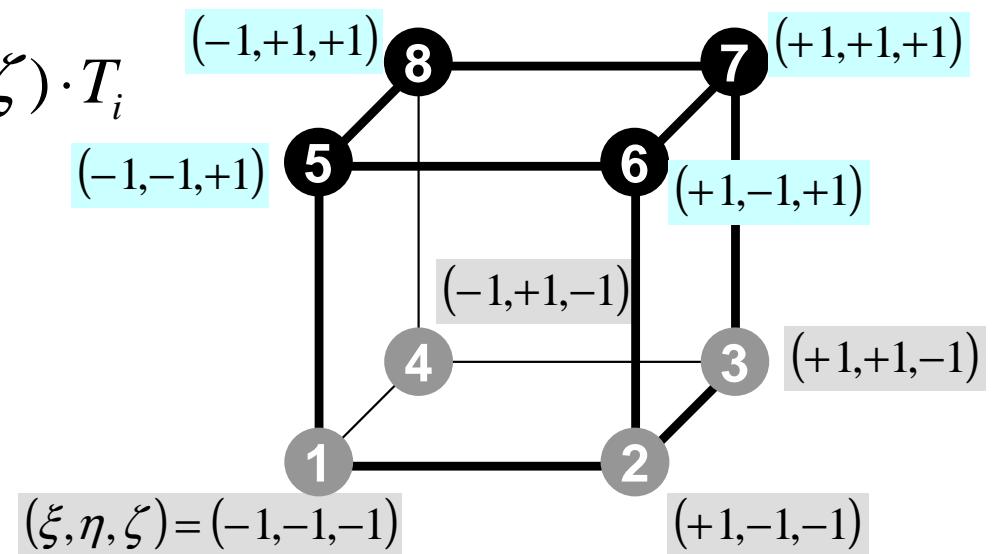

- Formulation of 3D Element
- **3D Heat Equations**
  - Galerkin Method
  - Element Matrices
- Running the Code
- Data Structure
- Overview of the Program

# Galerkin Method (1/3)

- Governing Equation for 3D Steady State Heat Conduction Problems (uniform  $\lambda$ ):

$$\left( \lambda \frac{\partial^2 T}{\partial x^2} \right) + \left( \lambda \frac{\partial^2 T}{\partial y^2} \right) + \left( \lambda \frac{\partial^2 T}{\partial z^2} \right) + \dot{Q} = 0$$

$T = [N]\{\phi\}$  Distribution of temperature in each element (matrix form),  $\phi$ : Temperature at each node

- Following integral equation is obtained at each element by Galerkin method, where  $[N]$ 's are also weighting functions:

$$\int_V [N]^T \left\{ \lambda \left( \frac{\partial^2 T}{\partial x^2} \right) + \lambda \left( \frac{\partial^2 T}{\partial y^2} \right) + \lambda \left( \frac{\partial^2 T}{\partial z^2} \right) + \dot{Q} \right\} dV = 0$$

# Galerkin Method (2/3)

- Green's Theorem (3D)

$$\int_V A \left( \frac{\partial^2 B}{\partial x^2} + \frac{\partial^2 B}{\partial y^2} + \frac{\partial^2 B}{\partial z^2} \right) dV = \int_S A \frac{\partial B}{\partial n} dS - \int_V \left( \frac{\partial A}{\partial x} \frac{\partial B}{\partial x} + \frac{\partial A}{\partial y} \frac{\partial B}{\partial y} + \frac{\partial A}{\partial z} \frac{\partial B}{\partial z} \right) dV$$

- Apply this to the 1st 3-parts of the equation with 2<sup>nd</sup>-order diff. (surface integration terms are ignored):

$$\begin{aligned} & \int_V [N]^T \{ \lambda(T_{,xx}) + \lambda(T_{,yy}) + \lambda(T_{,zz}) \} dV \\ &= - \int_V \{ \lambda([N_{,x}]^T T_{,x}) + \lambda([N_{,y}]^T T_{,y}) + \lambda([N_{,z}]^T T_{,z}) \} dV \end{aligned}$$

- Consider the following terms:

$$T = [N]\{\phi\}, \quad T_{,x} = [N_{,x}]\{\phi\}, \quad T_{,y} = [N_{,y}]\{\phi\}, \quad T_{,z} = [N_{,z}]\{\phi\}$$

# Galerkin Method (3/3)

- Finally, following equation is obtained by considering heat generation term  $\dot{Q}$  :

$$-\int_V \left\{ \lambda([N_{,x}]^T [N_{,x}]) + \lambda([N_{,y}]^T [N_{,y}]) + \lambda([N_{,z}]^T [N_{,z}]) \right\} dV \cdot \{\phi\} + \int_V \dot{Q}[N] dV = 0$$

- This is called “weak form (弱形式)”. Original PDE consists of terms with 2<sup>nd</sup>-order diff., but this “weak form” only includes 1<sup>st</sup>-order diff by Green’s theorem.
  - Requirements for shape functions are “weaker” in “weak form”. Linear functions can describe effects of 2<sup>nd</sup>-order differentiation.
  - Same as 1D problem


# Weak Form with B.C.: on each elem.

$$[k]^{(e)} \{\phi\}^{(e)} = \{f\}^{(e)}$$


$$\begin{aligned} [k]^{(e)} &= \int_V \lambda \left( [N_{,x}]^T [N_{,x}] \right) dV + \int_V \lambda \left( [N_{,y}]^T [N_{,y}] \right) dV \\ &\quad + \int_V \lambda \left( [N_{,z}]^T [N_{,z}] \right) dV \end{aligned}$$

$$[f]^{(e)} = \int_V \dot{\mathcal{Q}} [N]^T dV$$

# Element Matrix: 8x8

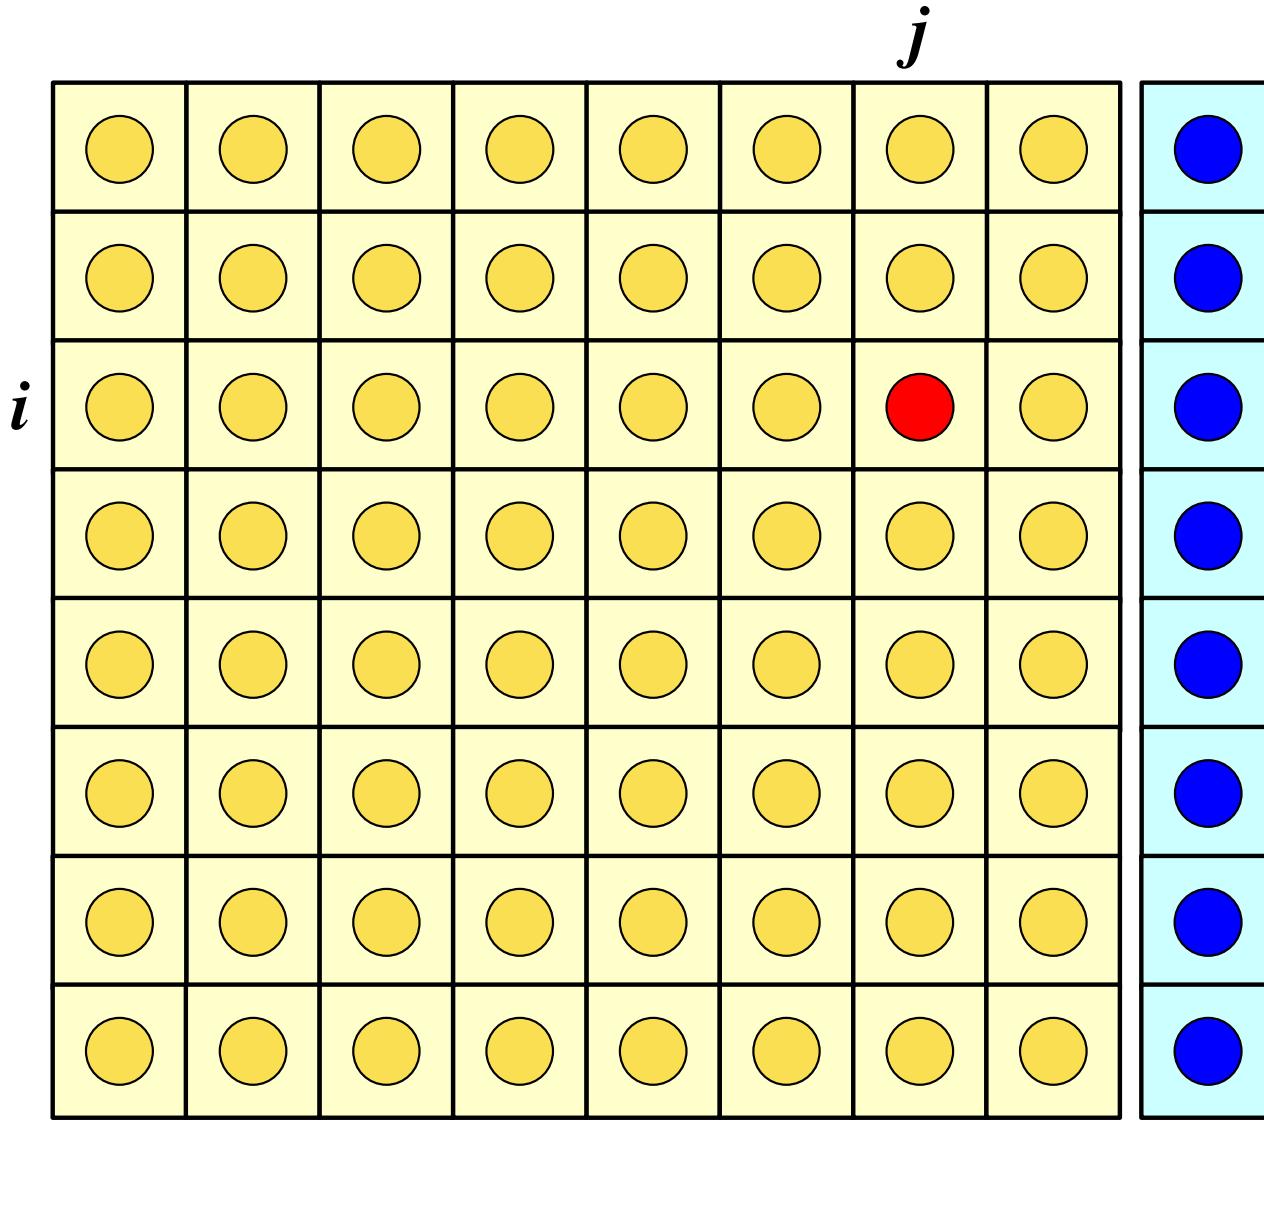


$$[k_{ij}] \quad (i, j = 1 \dots 8)$$

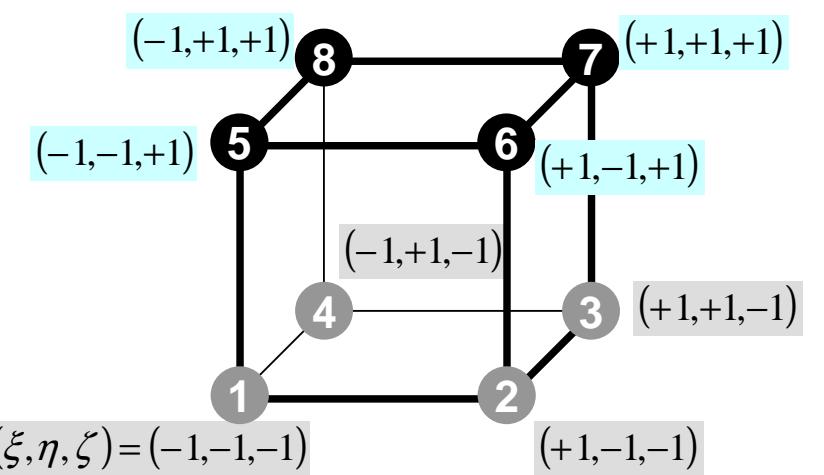

# Element Matrix: $k_{ij}$

$$\begin{bmatrix} k_{ij} \end{bmatrix} \quad (i, j = 1 \dots 8)$$

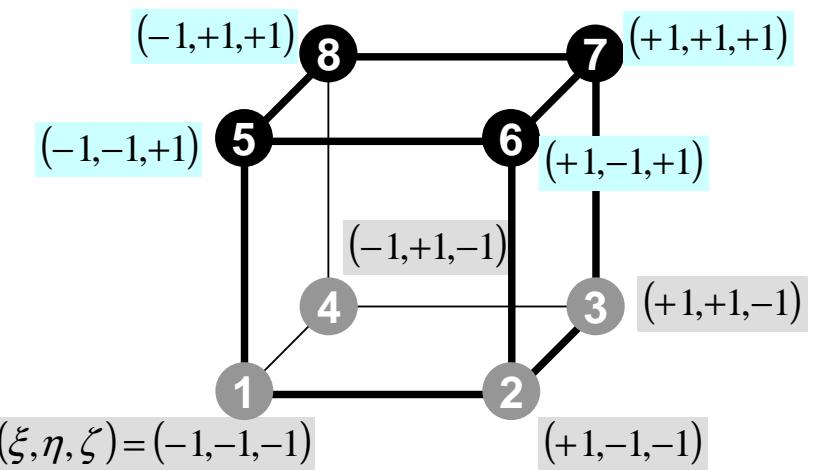

$$[k]^{(e)} = \int_V \lambda \left( [N_{,x}]^T [N_{,x}] \right) dV + \int_V \lambda \left( [N_{,y}]^T [N_{,y}] \right) dV$$

$$+ \int_V \lambda \left( [N_{,z}]^T [N_{,z}] \right) dV$$




$$k_{ij} = - \int_V \left\{ \lambda \cdot N_{i,x} \cdot N_{j,x} \right\} dV$$

$$k_{ij} = - \int_V \left\{ \lambda \cdot N_{i,x} \cdot N_{j,x} + \lambda \cdot N_{i,y} \cdot N_{j,y} + \lambda \cdot N_{i,z} \cdot N_{j,z} \right\} dV$$

# Methods for Numerical Integration

- Trapezoidal Rule
- Simpson's Rule
- Gaussian Quadrature (or Gauss-Legendre)
  - accurate
- Values of functions at finite numbers of sample points are utilized:


$$\int_{X_1}^{X_2} f(x)dx \Rightarrow \sum_{k=1}^m [w_k \cdot f(x_k)]$$

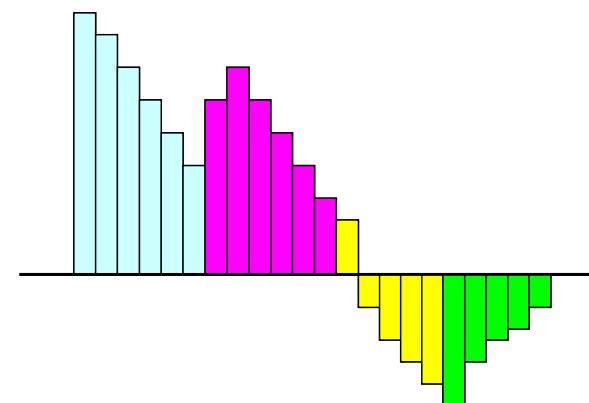

# Gaussian Quadrature in 1D


more accurate than Simpson's rule

**Simpson's**

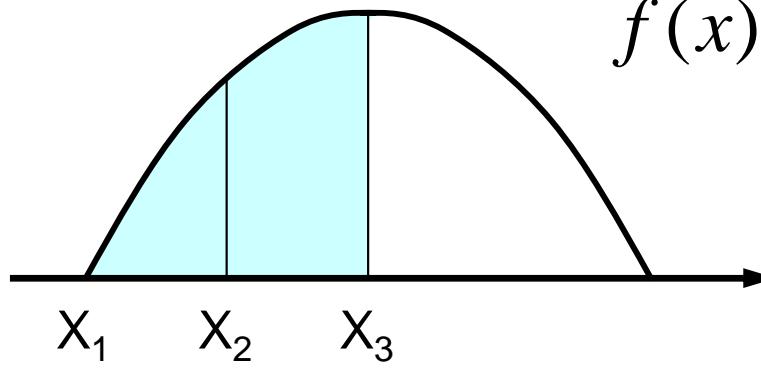

**Gauss**

$$f(x) = \sin(x)$$

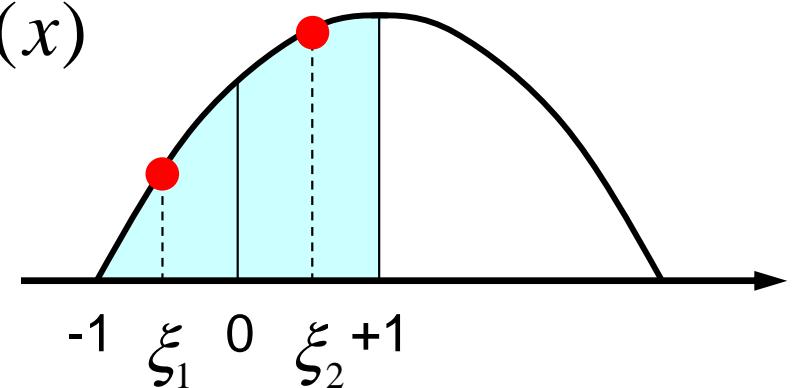

$$X_1 = 0, \quad X_2 = \frac{\pi}{4}, \quad X_3 = \frac{\pi}{2}$$

$$h = X_2 - X_1 = X_3 - X_1 = \frac{\pi}{4}$$

$$S = \frac{h}{3} [f(X_1) + 4f(X_2) + f(X_3)] = 1.0023$$

$$\xi_1, \xi_2 = \pm 0.5773502692$$

$$S = \int_0^{\pi/2} f(x) dx = \int_{-1}^{+1} f(\xi) h d\xi$$


$$\cong h \sum_{k=1}^2 W_k \cdot f(\xi_k) = 0.99847$$

# Gaussian Quadrature

## ガウスの積分公式

- On normalized “natural (or local)” coordinate system [-1,+1] (自然座標系, 局所座標系)
- Can approximate up to  $(2m-1)$ -th order of functions by  $m$  quadrature points ( $m=2$  is enough for quadratic shape functions).

$$\int_{-1}^{+1} f(\xi) d\xi = \sum_{k=1}^m [w_k \cdot f(\xi_k)]$$

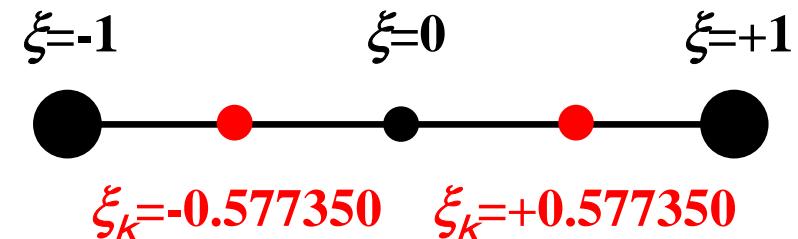

$$m=1 \quad \xi_k = 0.00, w_k = 2.00$$


$$m=2 \quad \xi_k = \pm 0.577350, w_k = 1.00$$

$$m=3 \quad \xi_k = 0.00, w_k = 8/9$$

$$\xi_k = \pm 0.774597, w_k = 5/9$$

# Gaussian Quadrature

can be easily extended to 2D & 3D

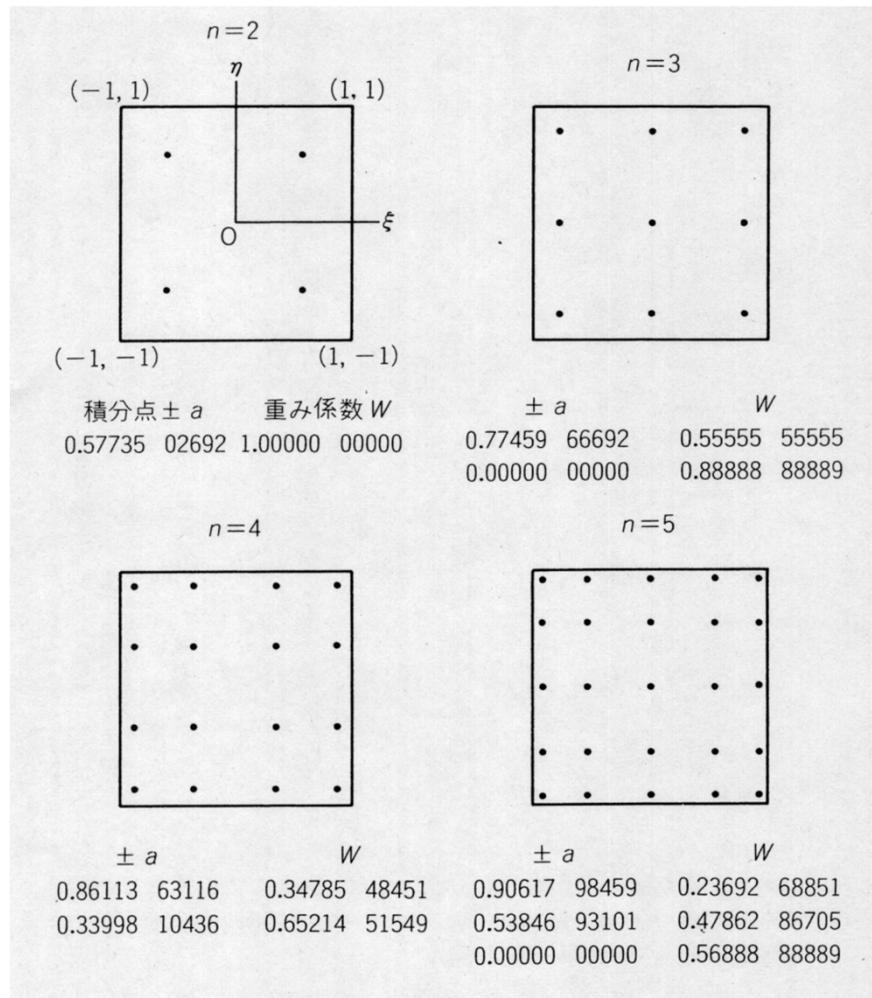

$$I = \int_{-1}^{+1} \int_{-1}^{+1} f(\xi, \eta) d\xi d\eta$$

$$= \sum_{i=1}^m \sum_{j=1}^n [W_i \cdot W_j \cdot f(\xi_i, \eta_j)]$$

$m, n$ : number of quadrature points in  $\xi, \eta$ -direction


$(\xi_i, \eta_j)$ : Coordinates of Quad's

$W_i, W_j$ : Weighting Factor

# Gaussian Quadrature

## ガウスの積分公式


This configuration is widely used. In 2D problem, integration is done using values of "f" at 4 quad. points.

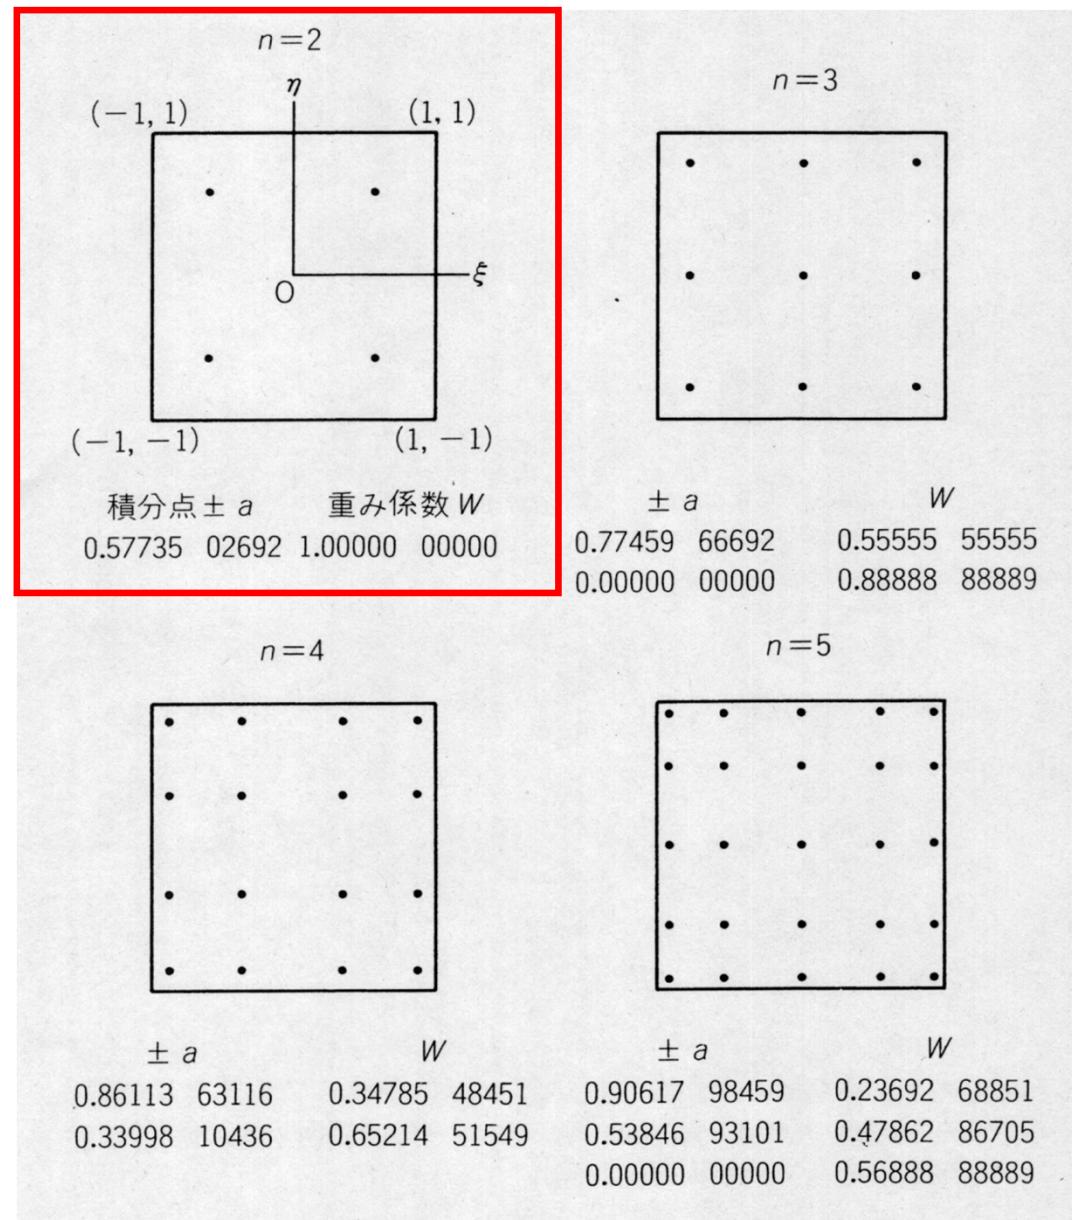

# Gaussian Quadrature

## ガウスの積分公式

This configuration is widely used. In 2D problem, integration is done using values of "f" at 4 quad. points.

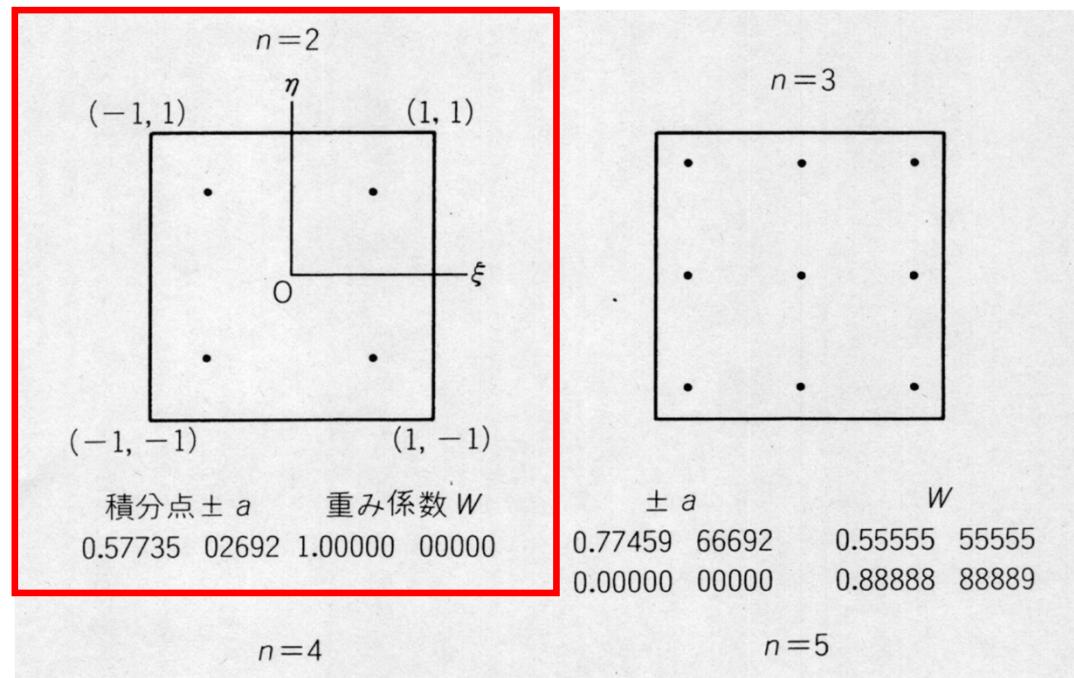


$$\begin{aligned}
 I &= \int_{-1}^{+1} \int_{-1}^{+1} f(\xi, \eta) d\xi d\eta = \sum_{i=1}^m \sum_{j=1}^n [W_i \cdot W_j \cdot f(\xi_i, \eta_j)] \\
 &= 1.0 \times 1.0 \times f(-0.57735, -0.57735) + 1.0 \times 1.0 \times f(-0.57735, +0.57735) \\
 &\quad + 1.0 \times 1.0 \times f(+0.57735, +0.57735) + 1.0 \times 1.0 \times f(+0.57735, -0.57735)
 \end{aligned}$$

0.33998 10436 0.05214 51549 0.55040 95101 0.47002 60705  
 0.00000 00000 0.56888 88889

# Next Stage: Integration

- 3D Natural/Local Coordinate  $(\xi, \eta, \zeta)$ :
  - Gaussian Quadrature

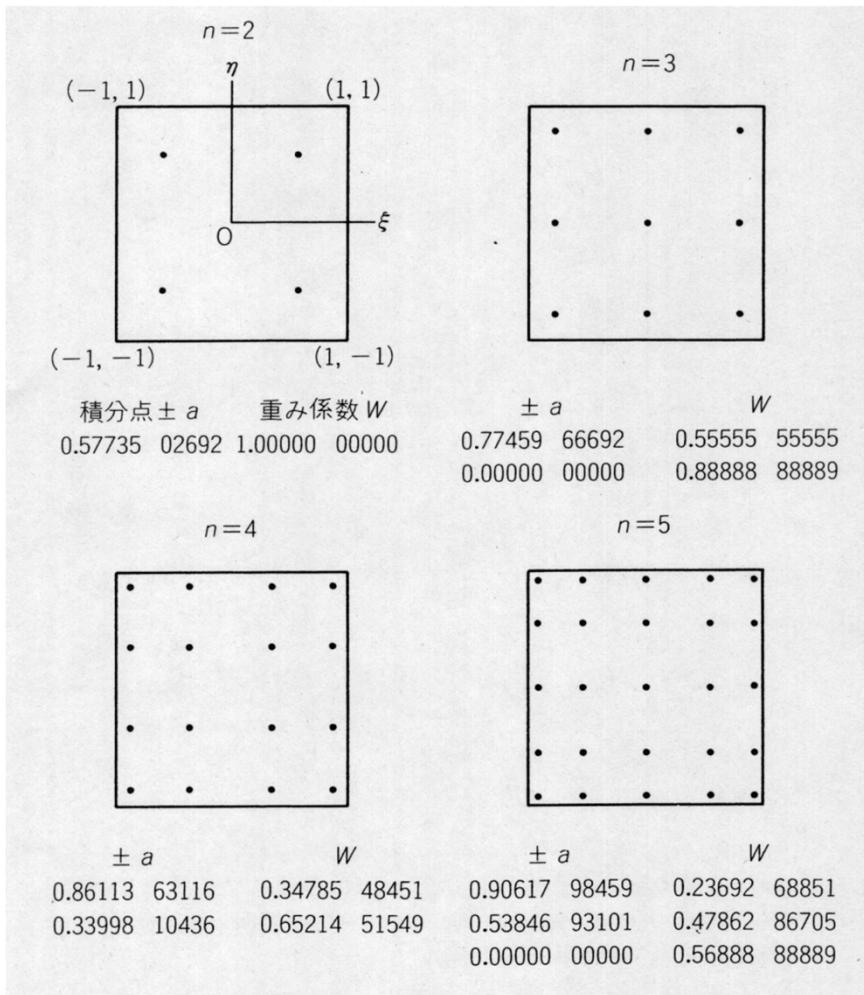

$$\begin{aligned}
 I &= \int_{-1}^{+1} \int_{-1}^{+1} \int_{-1}^{+1} f(\xi, \eta, \zeta) d\xi d\eta d\zeta \\
 &= \sum_{i=1}^L \sum_{j=1}^M \sum_{k=1}^N [W_i \cdot W_j \cdot W_k \cdot f(\xi_i, \eta_j, \zeta_k)]
 \end{aligned}$$

$L, M, N$ : number of quadrature points in  $\xi, \eta, \zeta$ -direction

$(\xi_i, \eta_j, \zeta_k)$  : Coordinates of Quad's

$W_i, W_j, W_k$  : Weighting Factor

# Partial Diff. on Natural Coord. (1/4)

- According to formulae:

$$\frac{\partial N_i(\xi, \eta, \zeta)}{\partial \xi} = \frac{\partial N_i}{\partial x} \frac{\partial x}{\partial \xi} + \frac{\partial N_i}{\partial y} \frac{\partial y}{\partial \xi} + \frac{\partial N_i}{\partial z} \frac{\partial z}{\partial \xi}$$

$$\frac{\partial N_i(\xi, \eta, \zeta)}{\partial \eta} = \frac{\partial N_i}{\partial x} \frac{\partial x}{\partial \eta} + \frac{\partial N_i}{\partial y} \frac{\partial y}{\partial \eta} + \frac{\partial N_i}{\partial z} \frac{\partial z}{\partial \eta}$$

$$\frac{\partial N_i(\xi, \eta, \zeta)}{\partial \zeta} = \frac{\partial N_i}{\partial x} \frac{\partial x}{\partial \zeta} + \frac{\partial N_i}{\partial y} \frac{\partial y}{\partial \zeta} + \frac{\partial N_i}{\partial z} \frac{\partial z}{\partial \zeta}$$

$\left[ \frac{\partial N_i}{\partial \xi}, \frac{\partial N_i}{\partial \eta}, \frac{\partial N_i}{\partial \zeta} \right]$  can be easily derived according to definitions.

$\left[ \frac{\partial N_i}{\partial x}, \frac{\partial N_i}{\partial y}, \frac{\partial N_i}{\partial z} \right]$  are required for computations.

# Partial Diff. on Natural Coord. (2/4)

- In matrix form:

$$\begin{Bmatrix} \frac{\partial N_i}{\partial \xi} \\ \frac{\partial N_i}{\partial \eta} \\ \frac{\partial N_i}{\partial \zeta} \end{Bmatrix} = \begin{bmatrix} \frac{\partial x}{\partial \xi} & \frac{\partial y}{\partial \xi} & \frac{\partial z}{\partial \xi} \\ \frac{\partial x}{\partial \eta} & \frac{\partial y}{\partial \eta} & \frac{\partial z}{\partial \eta} \\ \frac{\partial x}{\partial \zeta} & \frac{\partial y}{\partial \zeta} & \frac{\partial z}{\partial \zeta} \end{bmatrix} \begin{Bmatrix} \frac{\partial N_i}{\partial x} \\ \frac{\partial N_i}{\partial y} \\ \frac{\partial N_i}{\partial z} \end{Bmatrix} = [J] \begin{Bmatrix} \frac{\partial N_i}{\partial x} \\ \frac{\partial N_i}{\partial y} \\ \frac{\partial N_i}{\partial z} \end{Bmatrix}$$

$[J]$  : Jacobi matrix, Jacobian

# Partial Diff. on Natural Coord. (3/4)

- Components of Jacobian:

$$J_{11} = \frac{\partial x}{\partial \xi} = \frac{\partial}{\partial \xi} \left( \sum_{i=1}^8 N_i x_i \right) = \sum_{i=1}^8 \frac{\partial N_i}{\partial \xi} x_i, \quad J_{12} = \frac{\partial y}{\partial \xi} = \frac{\partial}{\partial \xi} \left( \sum_{i=1}^8 N_i y_i \right) = \sum_{i=1}^8 \frac{\partial N_i}{\partial \xi} y_i,$$

$$J_{13} = \frac{\partial z}{\partial \xi} = \frac{\partial}{\partial \xi} \left( \sum_{i=1}^8 N_i z_i \right) = \sum_{i=1}^8 \frac{\partial N_i}{\partial \xi} z_i$$

$$J_{21} = \frac{\partial x}{\partial \eta} = \frac{\partial}{\partial \eta} \left( \sum_{i=1}^8 N_i x_i \right) = \sum_{i=1}^8 \frac{\partial N_i}{\partial \eta} x_i, \quad J_{22} = \frac{\partial y}{\partial \eta} = \frac{\partial}{\partial \eta} \left( \sum_{i=1}^8 N_i y_i \right) = \sum_{i=1}^8 \frac{\partial N_i}{\partial \eta} y_i,$$

$$J_{23} = \frac{\partial z}{\partial \eta} = \frac{\partial}{\partial \eta} \left( \sum_{i=1}^8 N_i z_i \right) = \sum_{i=1}^8 \frac{\partial N_i}{\partial \eta} z_i$$

$$J_{31} = \frac{\partial x}{\partial \zeta} = \frac{\partial}{\partial \zeta} \left( \sum_{i=1}^8 N_i x_i \right) = \sum_{i=1}^8 \frac{\partial N_i}{\partial \zeta} x_i, \quad J_{32} = \frac{\partial y}{\partial \zeta} = \frac{\partial}{\partial \zeta} \left( \sum_{i=1}^8 N_i y_i \right) = \sum_{i=1}^8 \frac{\partial N_i}{\partial \zeta} y_i,$$

$$J_{33} = \frac{\partial z}{\partial \zeta} = \frac{\partial}{\partial \zeta} \left( \sum_{i=1}^8 N_i z_i \right) = \sum_{i=1}^8 \frac{\partial N_i}{\partial \zeta} z_i$$


# Partial Diff. on Natural Coord. (4/4)

- Partial differentiation on global coordinate system is introduced as follows (with inverse of Jacobian matrix ( $3 \times 3$ ))

$$\begin{Bmatrix} \frac{\partial N_i}{\partial x} \\ \frac{\partial N_i}{\partial y} \\ \frac{\partial N_i}{\partial z} \end{Bmatrix} = \begin{bmatrix} \frac{\partial x}{\partial \xi} & \frac{\partial y}{\partial \xi} & \frac{\partial z}{\partial \xi} \\ \frac{\partial x}{\partial \eta} & \frac{\partial y}{\partial \eta} & \frac{\partial z}{\partial \eta} \\ \frac{\partial x}{\partial \zeta} & \frac{\partial y}{\partial \zeta} & \frac{\partial z}{\partial \zeta} \end{bmatrix}^{-1} \begin{Bmatrix} \frac{\partial N_i}{\partial \xi} \\ \frac{\partial N_i}{\partial \eta} \\ \frac{\partial N_i}{\partial \zeta} \end{Bmatrix} = [J]^{-1} \begin{Bmatrix} \frac{\partial N_i}{\partial \xi} \\ \frac{\partial N_i}{\partial \eta} \\ \frac{\partial N_i}{\partial \zeta} \end{Bmatrix}$$

# Integration on Element


$$[k_{ij}] \quad (i, j = 1 \dots 8)$$

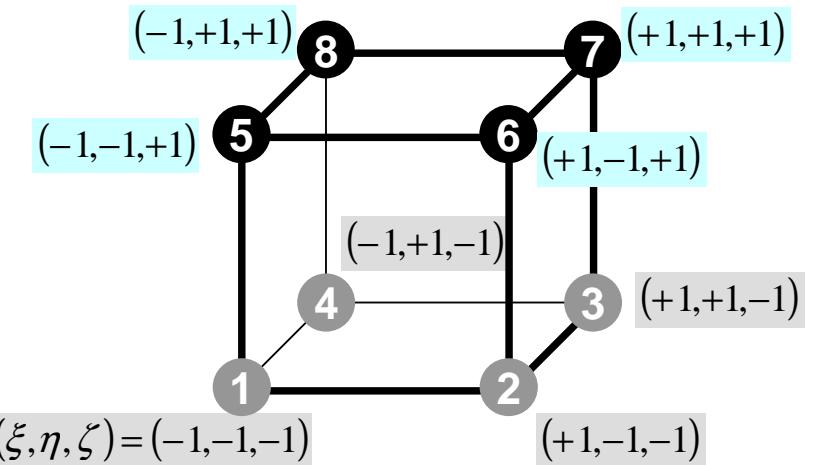

$$\begin{aligned} k_{ij} &= - \int_V \left\{ \lambda \cdot N_{i,x} \cdot N_{j,x} + \lambda \cdot N_{i,y} \cdot N_{j,y} + \lambda \cdot N_{i,z} \cdot N_{j,z} \right\} dV \\ &= - \int_V \left\{ \lambda \frac{\partial N_i}{\partial x} \frac{\partial N_j}{\partial x} + \lambda \frac{\partial N_i}{\partial y} \frac{\partial N_j}{\partial y} + \lambda \frac{\partial N_i}{\partial z} \frac{\partial N_j}{\partial z} \right\} dV \end{aligned}$$

# Integration on Natural Coord.


$$[k_{ij}] \quad (i, j = 1 \dots 8)$$

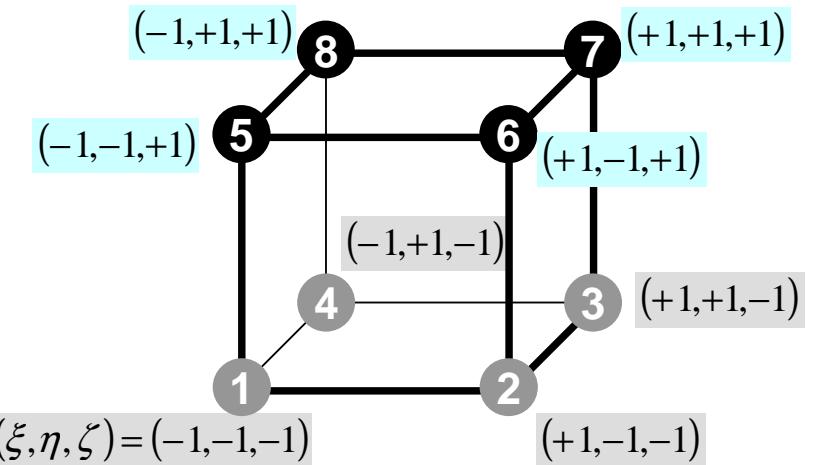

$$\begin{aligned}
 & - \int_V \left\{ \lambda \frac{\partial N_i}{\partial x} \frac{\partial N_j}{\partial x} + \lambda \frac{\partial N_i}{\partial y} \frac{\partial N_j}{\partial y} + \lambda \frac{\partial N_i}{\partial z} \frac{\partial N_j}{\partial z} \right\} dV = \\
 & - \int \int \int \left\{ \lambda \frac{\partial N_i}{\partial x} \frac{\partial N_j}{\partial x} + \lambda \frac{\partial N_i}{\partial y} \frac{\partial N_j}{\partial y} + \lambda \frac{\partial N_i}{\partial z} \frac{\partial N_j}{\partial z} \right\} dx dy dz = \\
 & - \int_{-1}^{+1} \int_{-1}^{+1} \int_{-1}^{+1} \left\{ \lambda \frac{\partial N_i}{\partial x} \frac{\partial N_j}{\partial x} + \lambda \frac{\partial N_i}{\partial y} \frac{\partial N_j}{\partial y} + \lambda \frac{\partial N_i}{\partial z} \frac{\partial N_j}{\partial z} \right\} \det|J| d\xi d\eta d\zeta
 \end{aligned}$$

# Gaussian Quadrature

$$\left[ k_{ij} \right] \quad (i, j = 1 \dots 8)$$

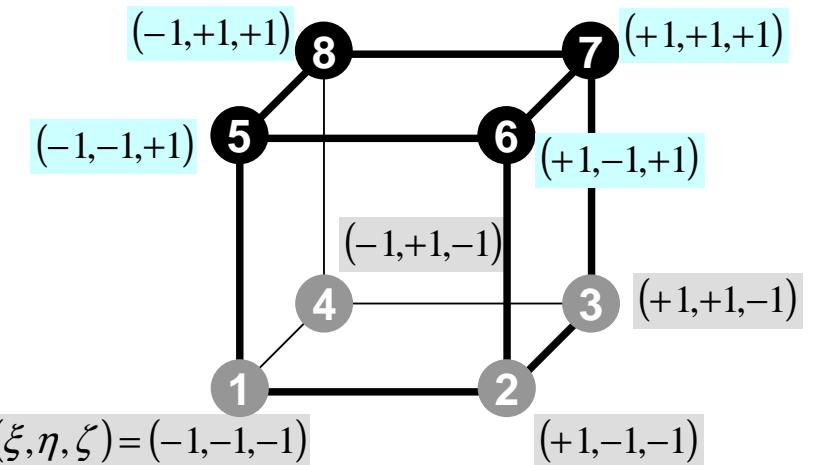

$$-\int_{-1}^{+1} \int_{-1}^{+1} \int_{-1}^{+1} \left\{ \lambda \frac{\partial N_i}{\partial x} \frac{\partial N_j}{\partial x} + \lambda \frac{\partial N_i}{\partial y} \frac{\partial N_j}{\partial y} + \lambda \frac{\partial N_i}{\partial z} \frac{\partial N_j}{\partial z} \right\} \det|J| d\xi d\eta d\zeta$$


$$I = \int_{-1}^{+1} \int_{-1}^{+1} \int_{-1}^{+1} f(\xi, \eta, \zeta) d\xi d\eta d\zeta$$

$$= \sum_{i=1}^L \sum_{j=1}^M \sum_{k=1}^N [W_i \cdot W_j \cdot W_k \cdot f(\xi_i, \eta_j, \zeta_k)]$$

# Remaining Procedures

- Element matrices have been formed.
- Accumulation to Global Matrix
- Implementation of Boundary Conditions
- Solving Linear Equations
- Details of implementation will be discussed in classes later than next week through explanation of programs

# Accumulation: Local $\rightarrow$ Global Matrices

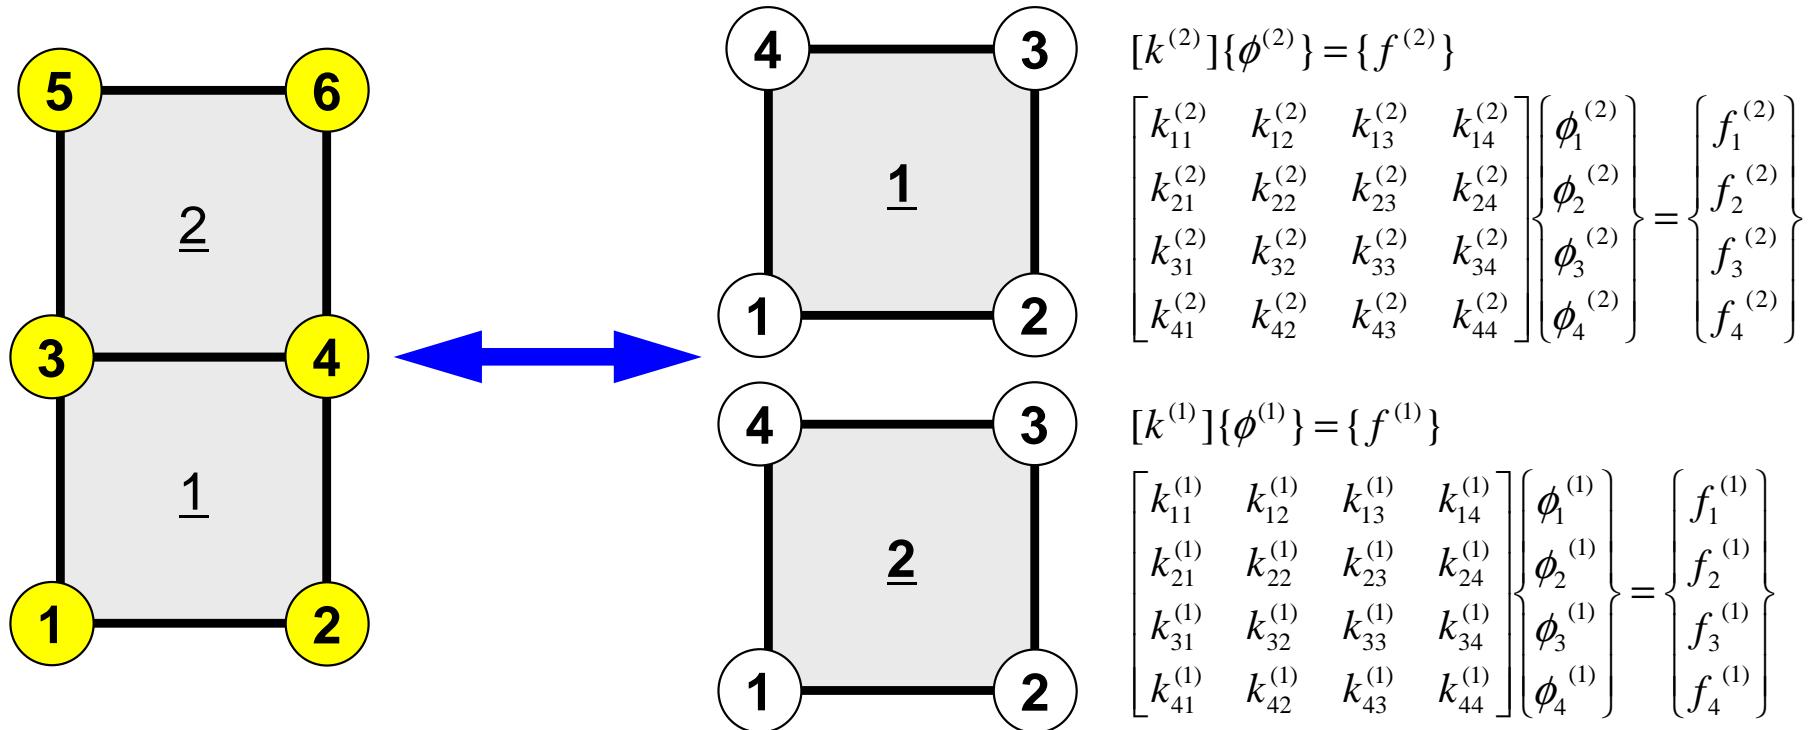


$$[K]\{\Phi\} = \{F\}$$

$$\begin{bmatrix} D_1 & X & X & X & & \\ X & D_2 & X & X & & \\ X & X & D_3 & X & X & X \\ X & X & X & D_4 & X & X \\ & & & & D_5 & X \\ & & & & X & D_6 \end{bmatrix} \begin{Bmatrix} \Phi_1 \\ \Phi_2 \\ \Phi_3 \\ \Phi_4 \\ \Phi_5 \\ \Phi_6 \end{Bmatrix} = \begin{Bmatrix} B_1 \\ B_2 \\ B_3 \\ B_4 \\ B_5 \\ B_6 \end{Bmatrix}$$

- Formulation of 3D Element
- 3D Heat Equations
  - Galerkin Method
  - Element Matrices
  - **Exercise**
- Running the Code
- Data Structure
- Overview of the Program

# Exercise

- Develop a program and calculate area of the following quadrilateral using Gaussian Quadrature.

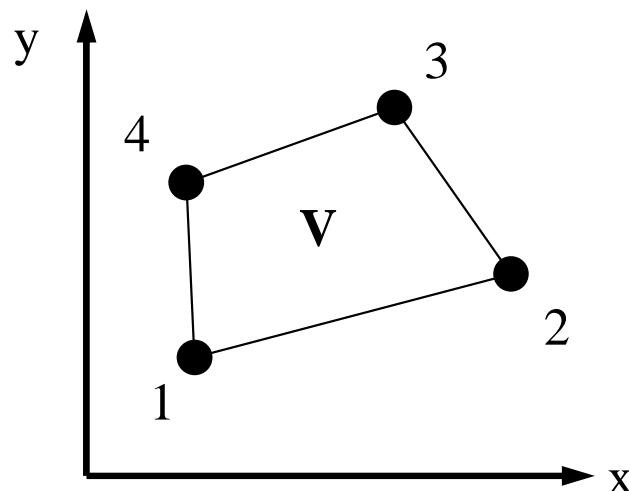

1: (1.0, 1.0)  
2: (4.0, 2.0)  
3: (3.0, 5.0)  
4: (2.0, 4.0)

$$I = \int_V dV = \int_{-1}^{+1} \int_{-1}^{+1} \det|J| d\xi d\zeta$$

# Tips (1/2)

- Calculate Jacobian
- Apply Gaussian Quadrature ( $n=2$ )

$$I = \int_{-1}^{+1} \int_{-1}^{+1} f(\xi, \eta) d\xi d\eta = \sum_{i=1}^m \sum_{j=1}^n [W_i \cdot W_j \cdot f(\xi_i, \eta_j)]$$


```

implicit REAL*8 (A-H,O-Z)
real*8 W(2)
real*8 POI(2)

W(1)= 1.0d0
W(2)= 1.0d0
POI(1)= -0.5773502692d0
POI(2)= +0.5773502692d0

SUM= 0.d0
do jp= 1, 2
do ip= 1, 2
  FC = F(POI(ip),POI(jp))
  SUM= SUM + W (ip)*W (jp)*FC
enddo
enddo

```

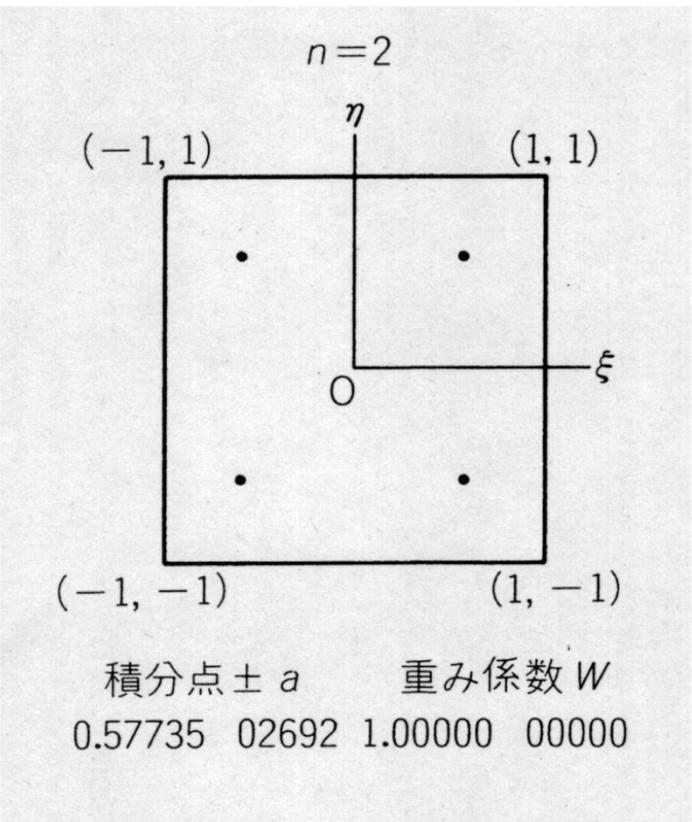

# Tips (2/2)

$$[J] = \begin{bmatrix} \frac{\partial x}{\partial \xi} & \frac{\partial y}{\partial \xi} \\ \frac{\partial x}{\partial \eta} & \frac{\partial y}{\partial \eta} \end{bmatrix}, \quad \det|J| = \frac{\partial x}{\partial \xi} \cdot \frac{\partial y}{\partial \eta} - \frac{\partial y}{\partial \xi} \cdot \frac{\partial x}{\partial \eta}$$

$$\frac{\partial x}{\partial \xi} = \frac{\partial}{\partial \xi} \left( \sum_{i=1}^4 N_i x_i \right) = \sum_{i=1}^4 \frac{\partial N_i}{\partial \xi} x_i, \quad \frac{\partial y}{\partial \xi} = \frac{\partial}{\partial \xi} \left( \sum_{i=1}^4 N_i y_i \right) = \sum_{i=1}^4 \frac{\partial N_i}{\partial \xi} y_i,$$

$$\frac{\partial x}{\partial \eta} = \frac{\partial}{\partial \eta} \left( \sum_{i=1}^4 N_i x_i \right) = \sum_{i=1}^4 \frac{\partial N_i}{\partial \eta} x_i, \quad \frac{\partial y}{\partial \eta} = \frac{\partial}{\partial \eta} \left( \sum_{i=1}^4 N_i y_i \right) = \sum_{i=1}^4 \frac{\partial N_i}{\partial \eta} y_i$$


$$N_1(\xi, \eta) = \frac{1}{4}(1-\xi)(1-\eta), \quad N_2(\xi, \eta) = \frac{1}{4}(1+\xi)(1-\eta),$$

$$N_3(\xi, \eta) = \frac{1}{4}(1+\xi)(1+\eta), \quad N_4(\xi, \eta) = \frac{1}{4}(1-\xi)(1+\eta)$$

- Formulation of 3D Element
- 3D Heat Equations
  - Galerkin Method
  - Element Matrices
- **Running the Code**
- Data Structure
- Overview of the Program

# 3D Steady-State Heat Conduction

$$\frac{\partial}{\partial x} \left( \lambda \frac{\partial T}{\partial x} \right) + \frac{\partial}{\partial y} \left( \lambda \frac{\partial T}{\partial y} \right) + \frac{\partial}{\partial z} \left( \lambda \frac{\partial T}{\partial z} \right) + \dot{Q}(x, y, z) = 0$$

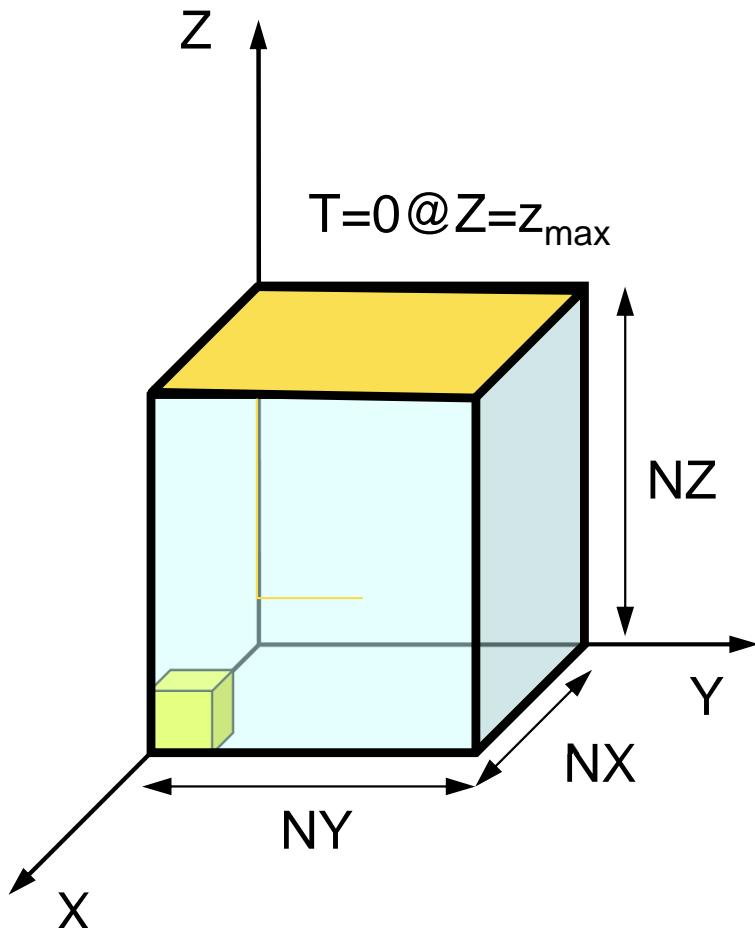

- Heat Generation
- Uniform thermal conductivity  $\lambda$
- HEX meshes
  - 1x1x1 cubes
  - NX, NY, NZ cubes in each direction
- Boundary Conditions
  - $T=0 @ Z=z_{max}$
- Heat Gen. Rate is a function of location (cell center:  $x_c, y_c$ )
  - $\dot{Q}(x, y, z) = QVOL|x_c + y_c|$

# Copy/Installation

## Install


```
>$ cd  
>$ cd fem-f/fem3d/src  
>$ make  
>$ ls ..../run/sol  
sol
```

## Install of Mesh Generator


```
>$ cd  
>$ cd fem-f/fem3d/run  
>$ gfortran -O3 mgcube.f -o mgcube
```

# Operations

Starting from Grid Generation to Computation, File-names are fixed

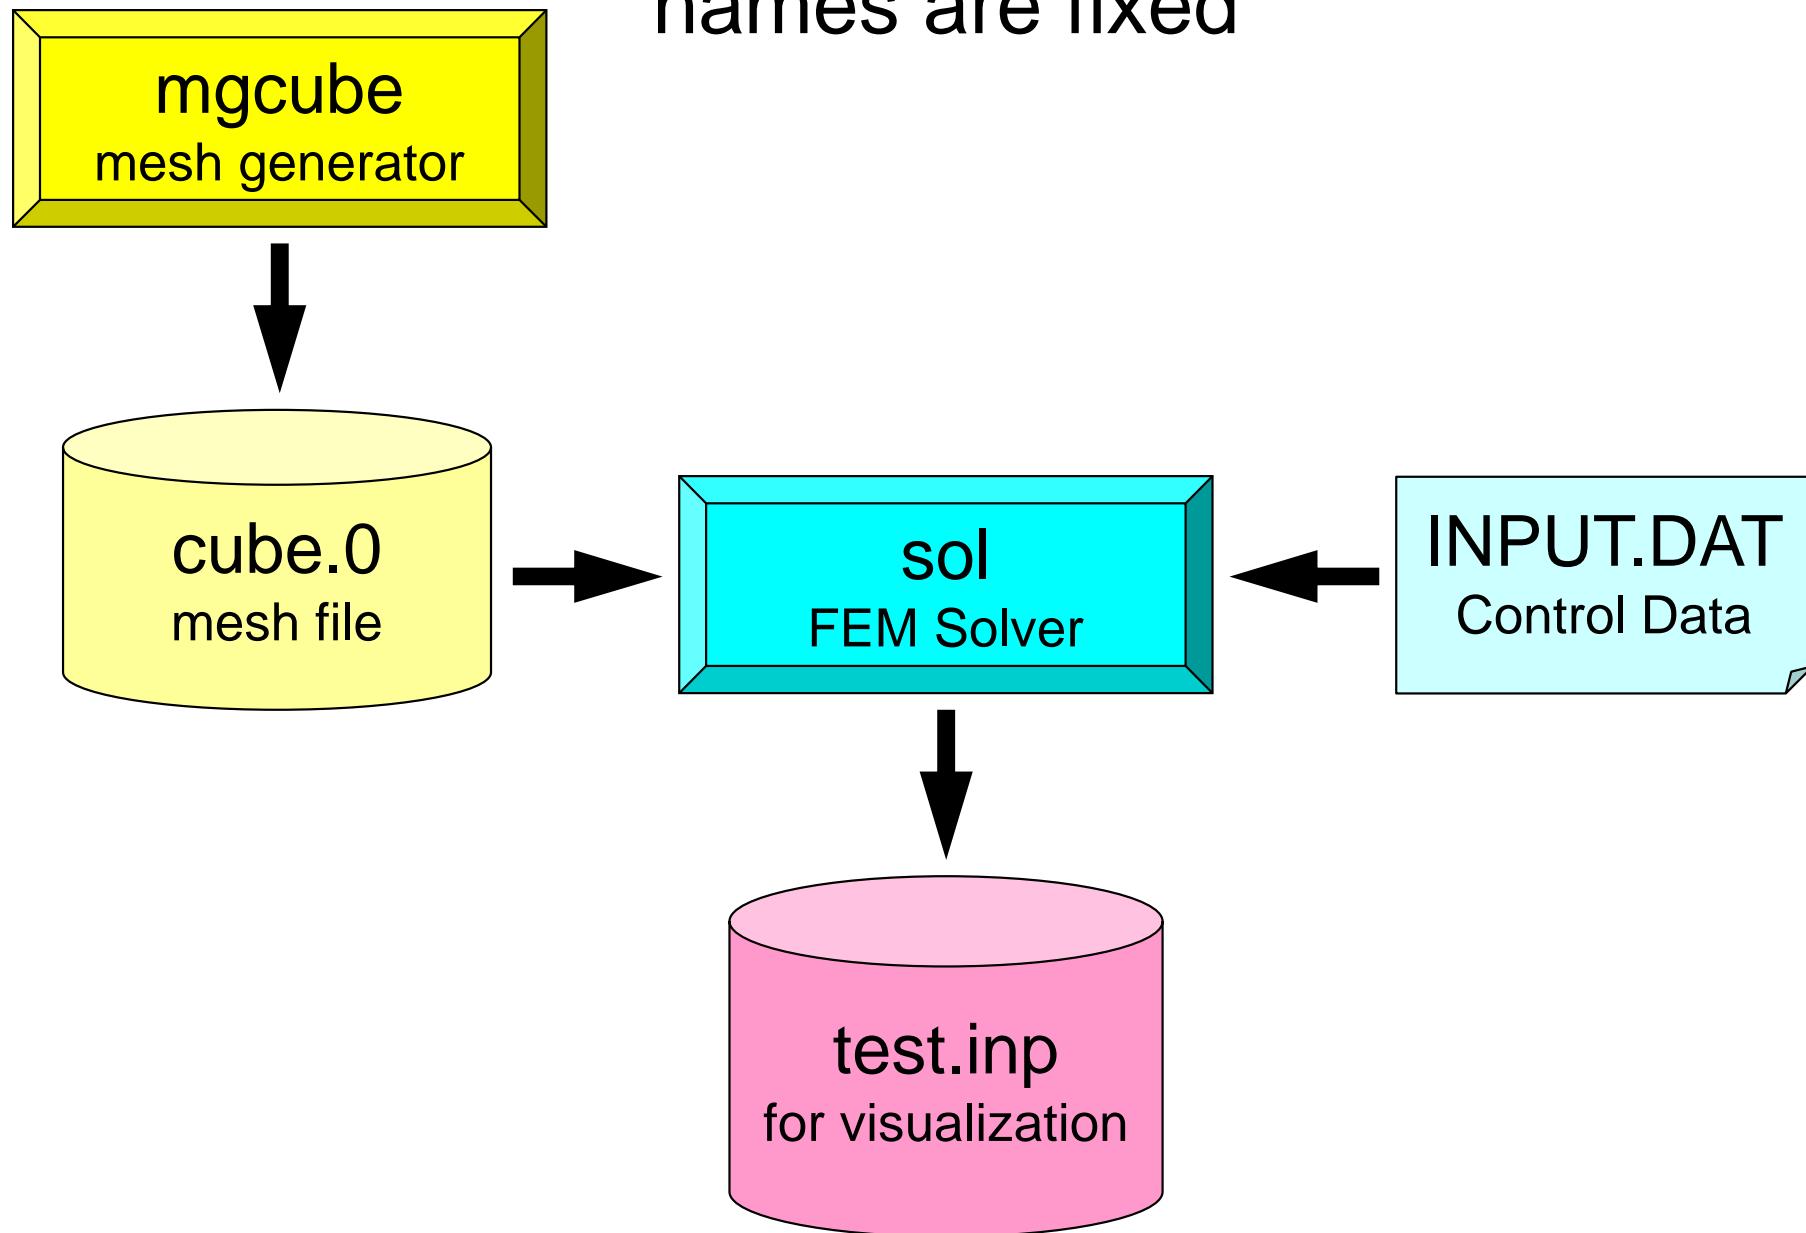

# Mesh Generation

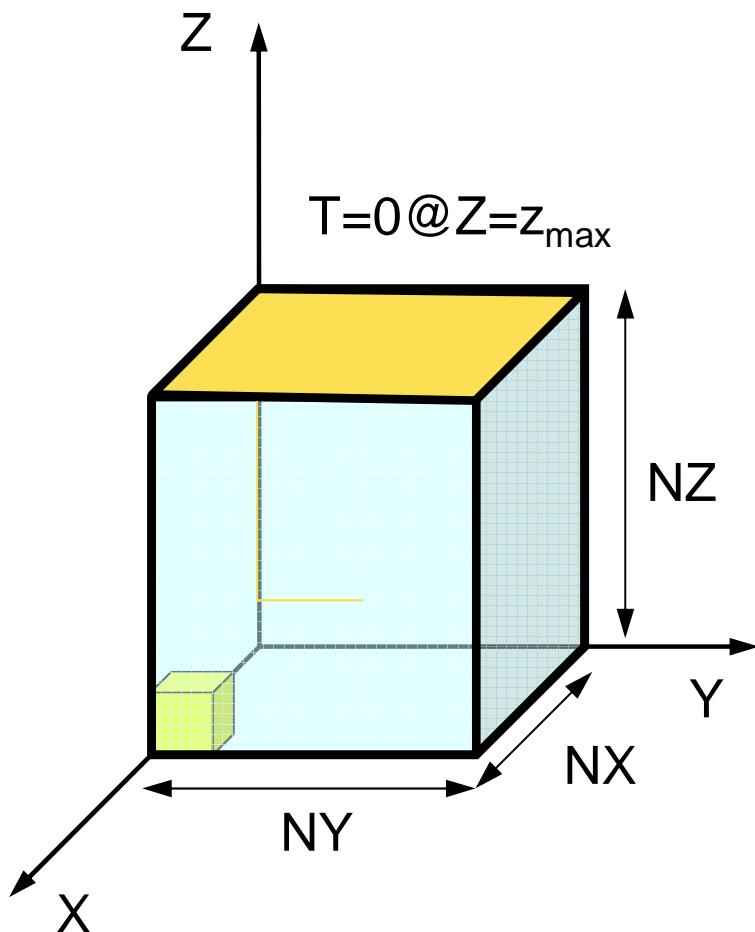

```
>$ cd  
>$ cd fem-f/fem3d/run  
>$ ./mgcube.exe (or ./mgcube)
```

NX, NY, NZ

← Number of  
Elem's in each  
direction  
← example

20,20,20

```
>$ ls cube.0
```

confirmation

cube.0

# Control File: INPUT.DAT

## INPUT.DAT

<b>cube.0</b>	<b>fname</b>
<b>2000</b>	<b>ITER</b>
<b>1.0 1.0</b>	<b>COND, QVOL</b>
<b>1.0e-08</b>	<b>RESID</b>

- **fname :** Name of Mesh File
- **ITER :** Max. Iterations for CG
- **COND :** Thermal Conductivity
- **QVOL :** Heat Generation Rate
- **RESID :** Criteria for Convergence of CG


$$\frac{\partial}{\partial x} \left( \lambda \frac{\partial T}{\partial x} \right) + \frac{\partial}{\partial y} \left( \lambda \frac{\partial T}{\partial y} \right) + \frac{\partial}{\partial z} \left( \lambda \frac{\partial T}{\partial z} \right) + \dot{Q}(x, y, z) = 0$$

$$\dot{Q}(x, y, z) = QVOL |x_c + y_c|$$

# Running

```
>$ cd  
>$ cd fem-c/fem3d/run  
>$ ./sol.exe (or ./sol)
```

```
>$ ls test.inp          Confirmation  
test.inp
```

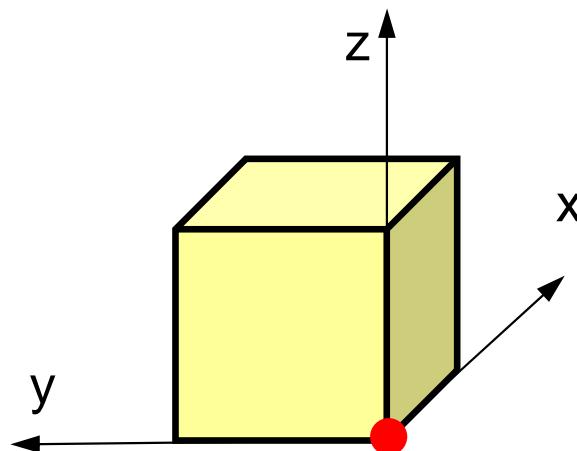

1	4.025833e+00
2	3.628020e+00
3	3.319234e+00
4	3.073771e+00
(...)	
55	9.238550e-07
56	3.876258e-07
57	1.854812e-07
58	1.062119e-07
59	3.541404e-08
60	1.284087e-08
61	6.073277e-09

Total Number of Iterations

1 3.391200e+03 Temperature at Origin (0, 0, 0)

# ParaView

- <http://www.paraview.org/>
- Opening files
- Displaying figures
- Saving image files
  - <http://nkl.cc.u-tokyo.ac.jp/20w/ParaView.pdf>

# UCD Format (1/3)

## Unstructured Cell Data

### 要素の種類

点

線

三角形

四角形

四面体

角錐

三角柱

六面体

二次要素

線2

三角形2

四角形2

四面体2

角錐2

三角柱2

六面体2

### キーワード

pt

line

tri

quad

tet

pyr

prism

hex

line2

tri2








quad2

tet2

pyr2

prism2

hex2

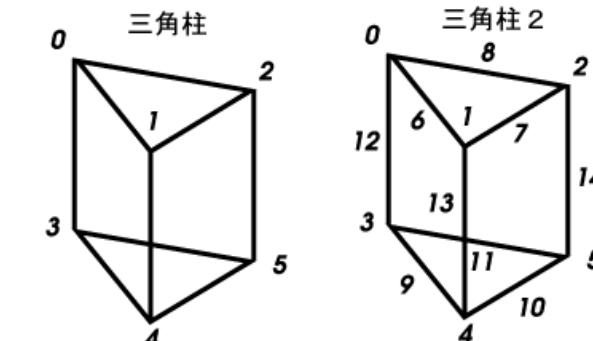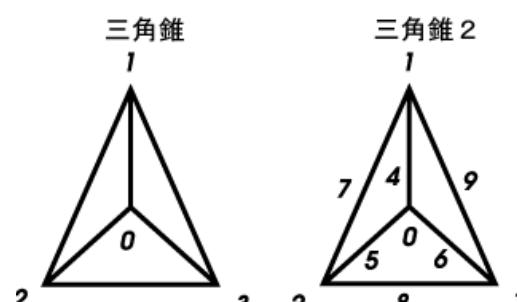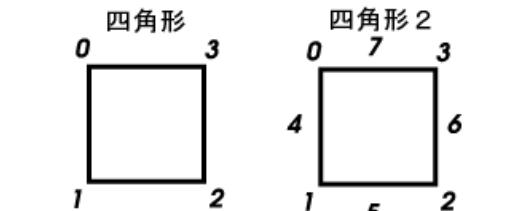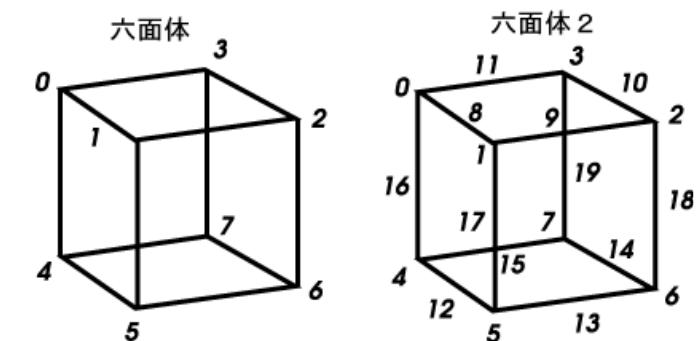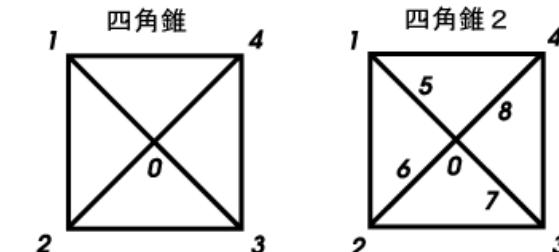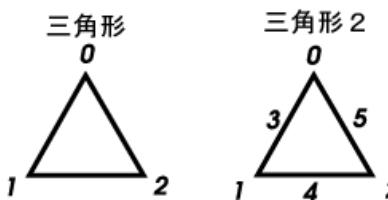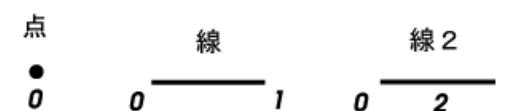

# UCD Format (2/3)

- Originally for AVS, microAVS
- Extension of the UCD file is “inp”
- There are two types of formats. Only old type can be read by ParaView.

# UCD Format (3/3): Old Format

(全節点数) (全要素数) (各節点のデータ数) (各要素のデータ数) (モデルのデータ数)

(節点番号1) (X座標) (Y座標) (Z座標)  
(節点番号2) (X座標) (Y座標) (Z座標)

(要素のデータ成分数) (成分1の構成数) (成分2の構成数) ……(各成分の構成数)  
(要素データ成分1のラベル), (単位)  
(要素データ成分2のラベル), (単位)

(各要素データ成分のラベル), (単位)  
(要素番号1) (要素データ1) (要素データ2) ……  
(要素番号2) (要素データ1) (要素データ2) ……

(要素番号1) (材料番号) (要素の種類) (要素を構成する節点のつながり)  
(要素番号2) (材料番号) (要素の種類) (要素を構成する節点のつながり)

(節点のデータ成分数) (成分1の構成数) (成分2の構成数) ……(各成分の構成数)

(節点データ成分1のラベル), (単位)  
(節点データ成分2のラベル), (単位)

(各節点データ成分のラベル), (単位)  
(節点番号1) (節点データ1) (節点データ2) ……  
(節点番号2) (節点データ1) (節点データ2) ……

- Formulation of 3D Element
- 3D Heat Equations
  - Galerkin Method
  - Element Matrices
- Running the Code
- **Data Structure**
- Overview of the Program

# Overview of Mesh File: cube.0


numbering starts from “1”

- Nodes
  - Node # (How many nodes ?)
  - Node ID, Coordinates
- Elements
  - Element #
  - Element Type
  - Element ID, Material ID, Connectivity
- Node Groups
  - Group #
  - Node # in each group
  - Group Name
  - Nodes in each group

# Example of “cube.0” ( $NX=NY=NZ=4$ )

## Node

125				$=5*5*5$ (Node #)
1	0.00	0.00	0.00	
2	1.00	0.00	0.00	
3	2.00	0.00	0.00	
4	3.00	0.00	0.00	
5	4.00	0.00	0.00	
6	0.00	1.00	0.00	
7	1.00	1.00	0.00	
8	2.00	1.00	0.00	
9	3.00	1.00	0.00	
...				
121	0.00	4.00	4.00	
122	1.00	4.00	4.00	
123	2.00	4.00	4.00	
124	3.00	4.00	4.00	
125	4.00	4.00	4.00	
<b>Node ID X-coord. Y Z</b>				

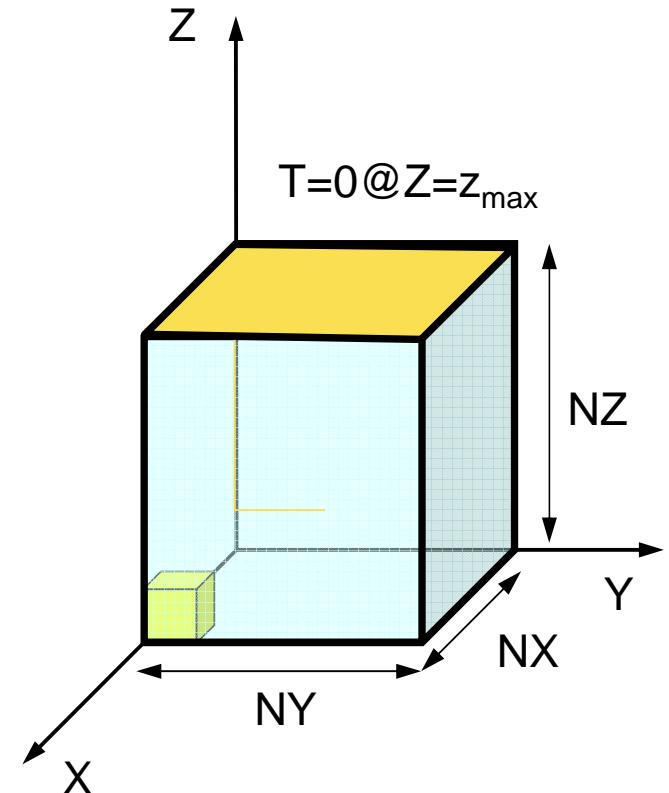


movie

# Example of “cube.0” ( $NX=NY=NZ=4$ )

## Element (1/2)



64															$=4*4*4$ (Element #)
361	361	361	361	361	361	361	361	361	361	361	361	361	361		
361	361	361	361	361	361	361	361	361	361	361	361	361	361		
361	361	361	361	361	361	361	361	361	361	361	361	361	361		
361	361	361	361	361	361	361	361	361	361	361	361	361	361		
361	361	361	361	361	361	361	361	361	361	361	361	361	361		
361	361	361	361	361	361	361	361	361	361	361	361	361	361		
361	361	361	361	361	361	361	361	361	361	361	361	361	361		

Element Type: 361  
 3D, Hexahedron, Linear (1<sup>st</sup> order)






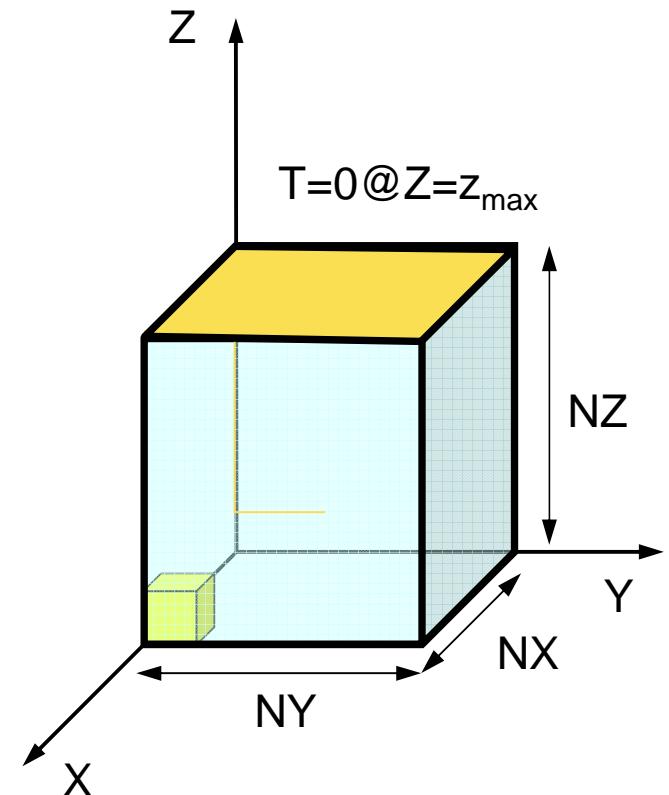


# Example of “cube.0” Element (2/2)

	ELEM ID	MAT-ID	ID of 8 nodes							
1	1	1	1	2	7	6	26	27	32	31
2	1	1	2	3	8	7	27	28	33	32
3	1	1	3	4	9	8	28	29	34	33
4	1	1	4	5	10	9	29	30	35	34
5	1	1	6	7	12	11	31	32	37	36
6	1	1	7	8	13	12	32	33	38	37
7	1	1	8	9	14	13	33	34	39	38
8	1	1	9	10	15	14	34	35	40	39
9	1	1	11	12	17	16	36	37	42	41
10	1	1	12	13	18	17	37	38	43	42
11	1	1	13	14	19	18	38	39	44	43
12	1	1	14	15	20	19	39	40	45	44
13	1	1	16	17	22	21	41	42	47	46
.	.	.	.	.	.	.	.	.	.	.
53	1	81	82	87	86	106	107	112	111	
54	1	82	83	88	87	107	108	113	112	
55	1	83	84	89	88	108	109	114	113	
56	1	84	85	90	89	109	110	115	114	
57	1	86	87	92	91	111	112	117	116	
58	1	87	88	93	92	112	113	118	117	
59	1	88	89	94	93	113	114	119	118	
60	1	89	90	95	94	114	115	120	119	
61	1	91	92	97	96	116	117	122	121	
62	1	92	93	98	97	117	118	123	122	
63	1	93	94	99	98	118	119	124	123	
64	1	94	95	100	99	119	120	125	124	

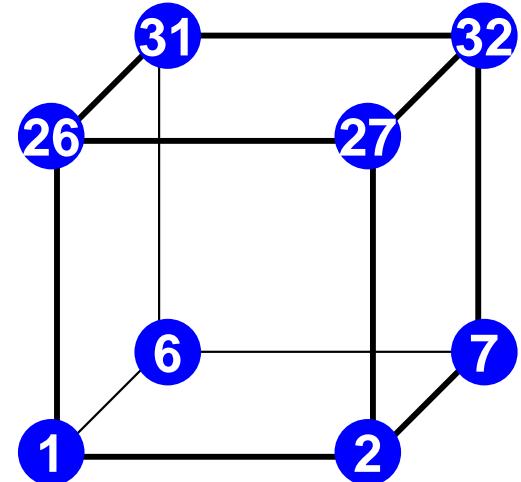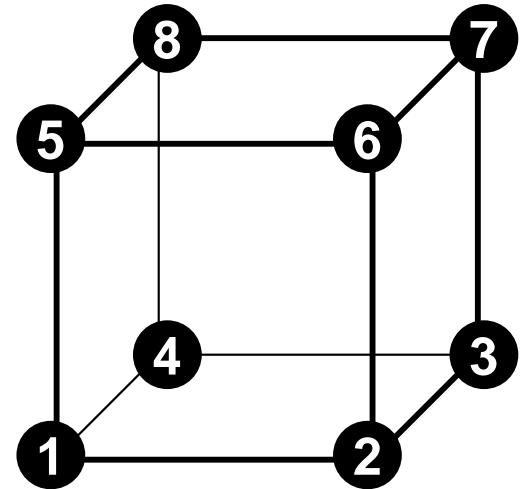


$NX=NY=NZ=4$ ,  $NXP1=NYP1=NZP1=5$   
 $ICELTOT= 64$ ,  $INODTOT= 125$ ,  $IBNODTOT= 25$

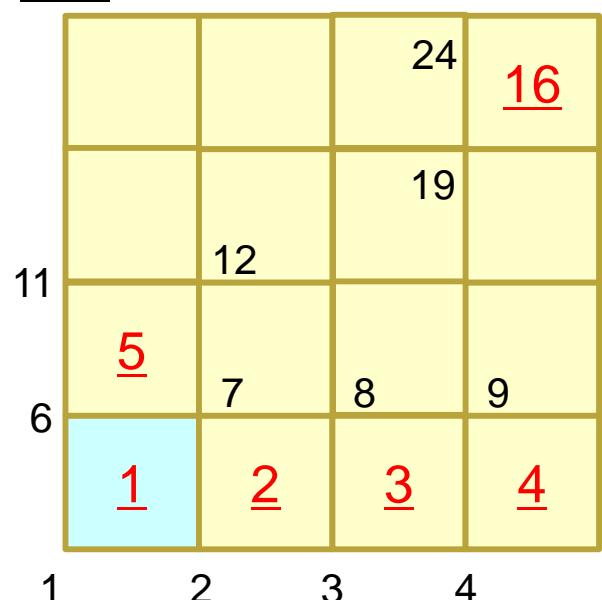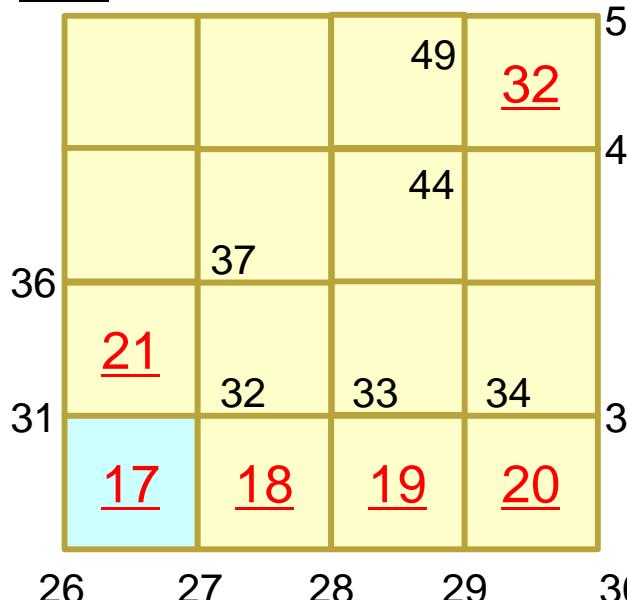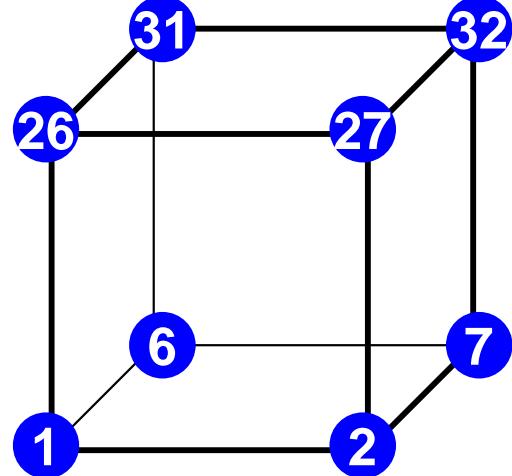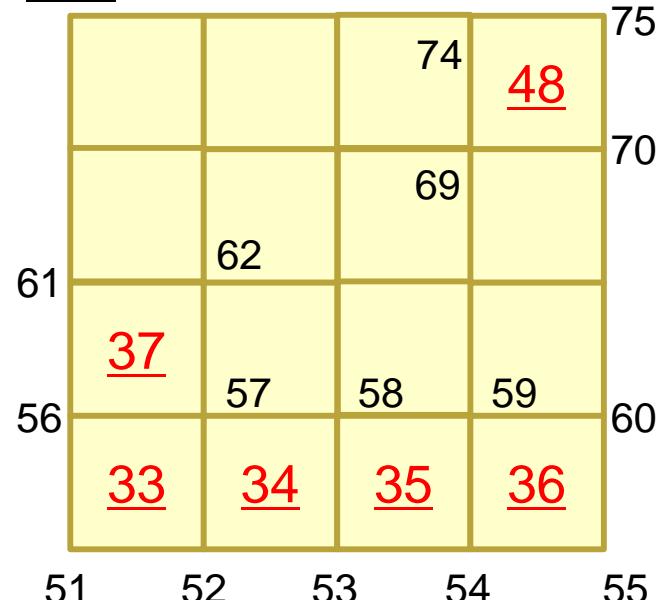
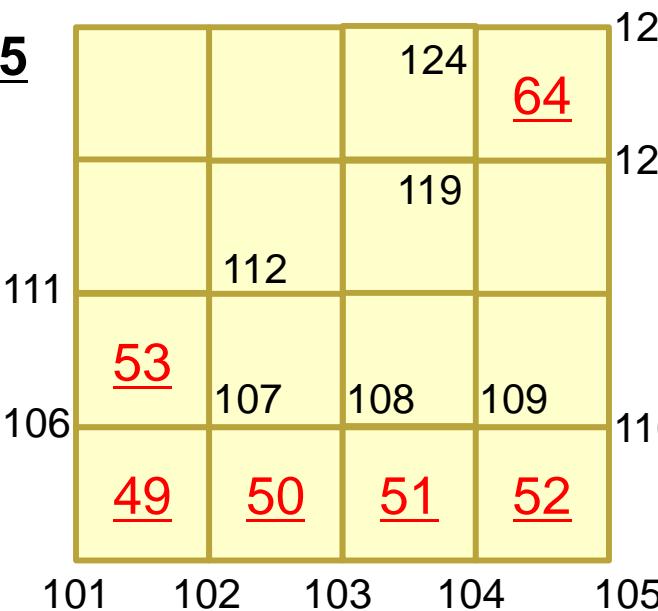
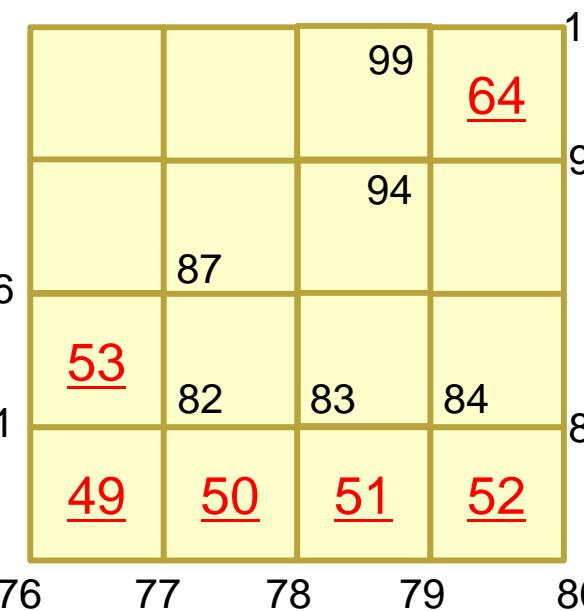
 $k=1$  $k=2$  $k=3$  $k=5$  $k=4$ 

# Example of “cube.0” Node Grp. Info.

	4	25	50	75	100	Number of Groups		Number of Nodes (ea. grp.)	
Xmin									
1	6	11	16	21	26	31	36	41	46
51	56	61	66	71	76	81	86	91	96
101	106	111	116	121					
Ymin									
1	2	3	4	5	26	27	28	29	30
51	52	53	54	55	76	77	78	79	80
101	102	103	104	105					
Zmin									
1	2	3	4	5	6	7	8	9	10
11	12	13	14	15	16	17	18	19	20
21	22	23	24	25					
Zmax									
101	102	103	104	105	106	107	108	109	110
111	112	113	114	115	116	117	118	119	120
121	122	123	124	125					
no use after this line									

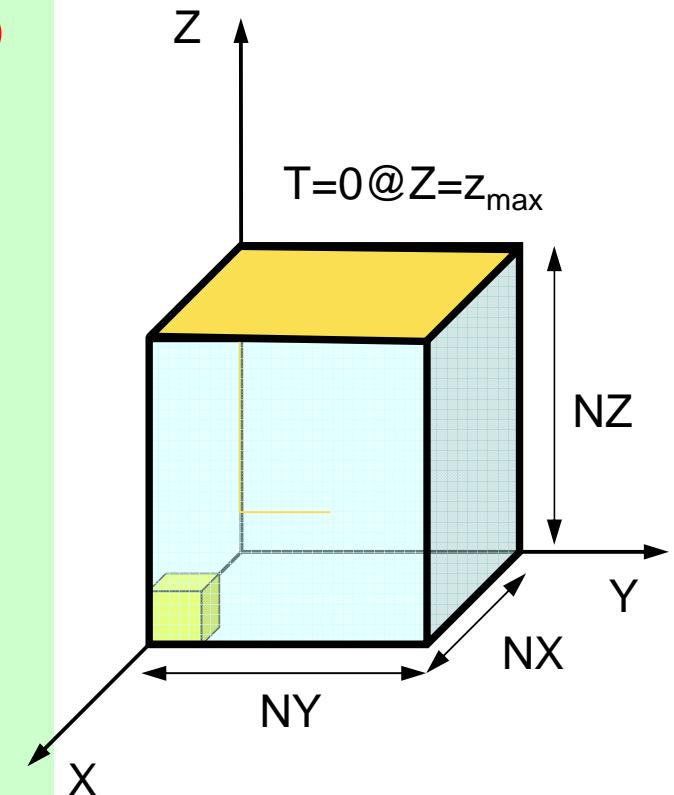

$NX=NY=NZ=4$ ,  $NXP1=NYP1=NZP1=5$   
 $ICELTOT= 64$ ,  $INODTOT= 125$ ,  $IBNODTOT= 25$

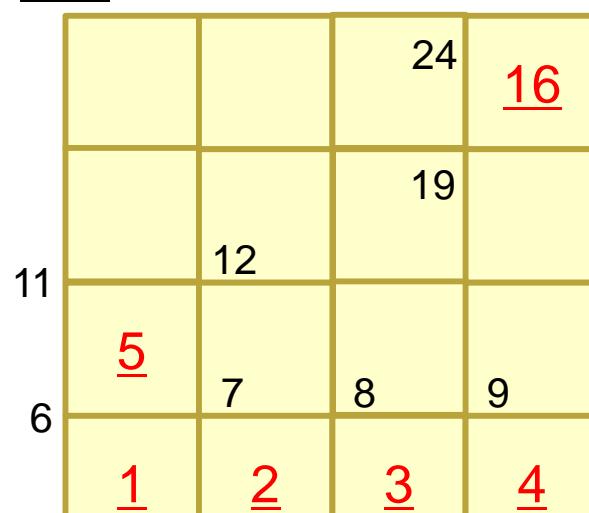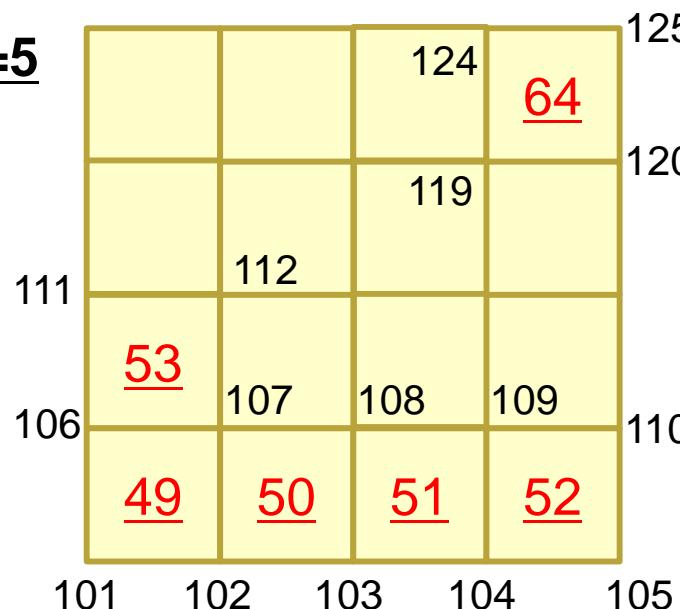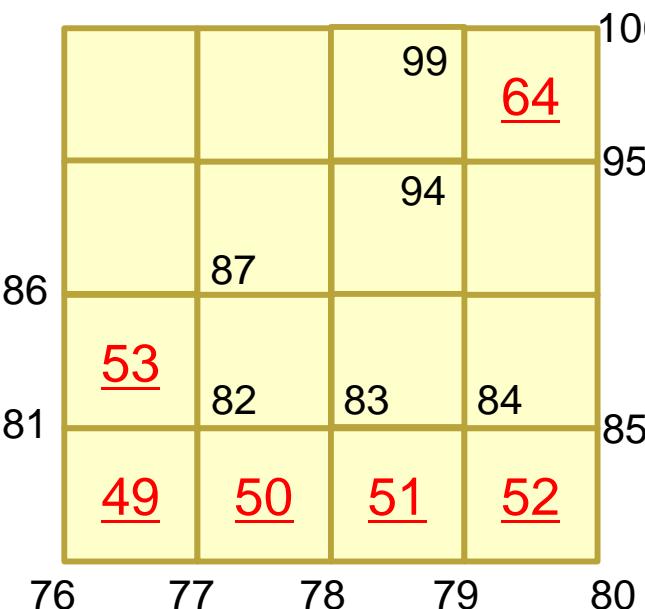 $k=1$  $k=2$  $k=3$  $k=5$  $k=4$ 

Xmin: i=1  
Ymin: j=1  
Zmin: k=1  
Zmax:k=5

# Mesh Generation

- Big Technical & Research Issue
  - Complicated Geometry
  - Large Scale
- Parallelization is difficult
- Commercial Mesh Generator
  - FEMAP
    - Interface to CAD Data Format


movie

- Formulation of 3D Element
- 3D Heat Equations
  - Galerkin Method
  - Element Matrices
- Running the Code
- Data Structure
- **Overview of the Program**

# FEM Procedures: Program

- Initialization
  - Control Data
  - Node, Connectivity of Elements (N: Node#, NE: Elem#)
  - Initialization of Arrays (Global/Element Matrices)
  - Element-Global Matrix Mapping (Index, Item)
- Generation of Matrix
  - Element-by-Element Operations (do icel= 1, NE)
    - Element matrices
    - Accumulation to global matrix
  - Boundary Conditions
- Linear Solver
  - Conjugate Gradient Method

# Structure of heat3D

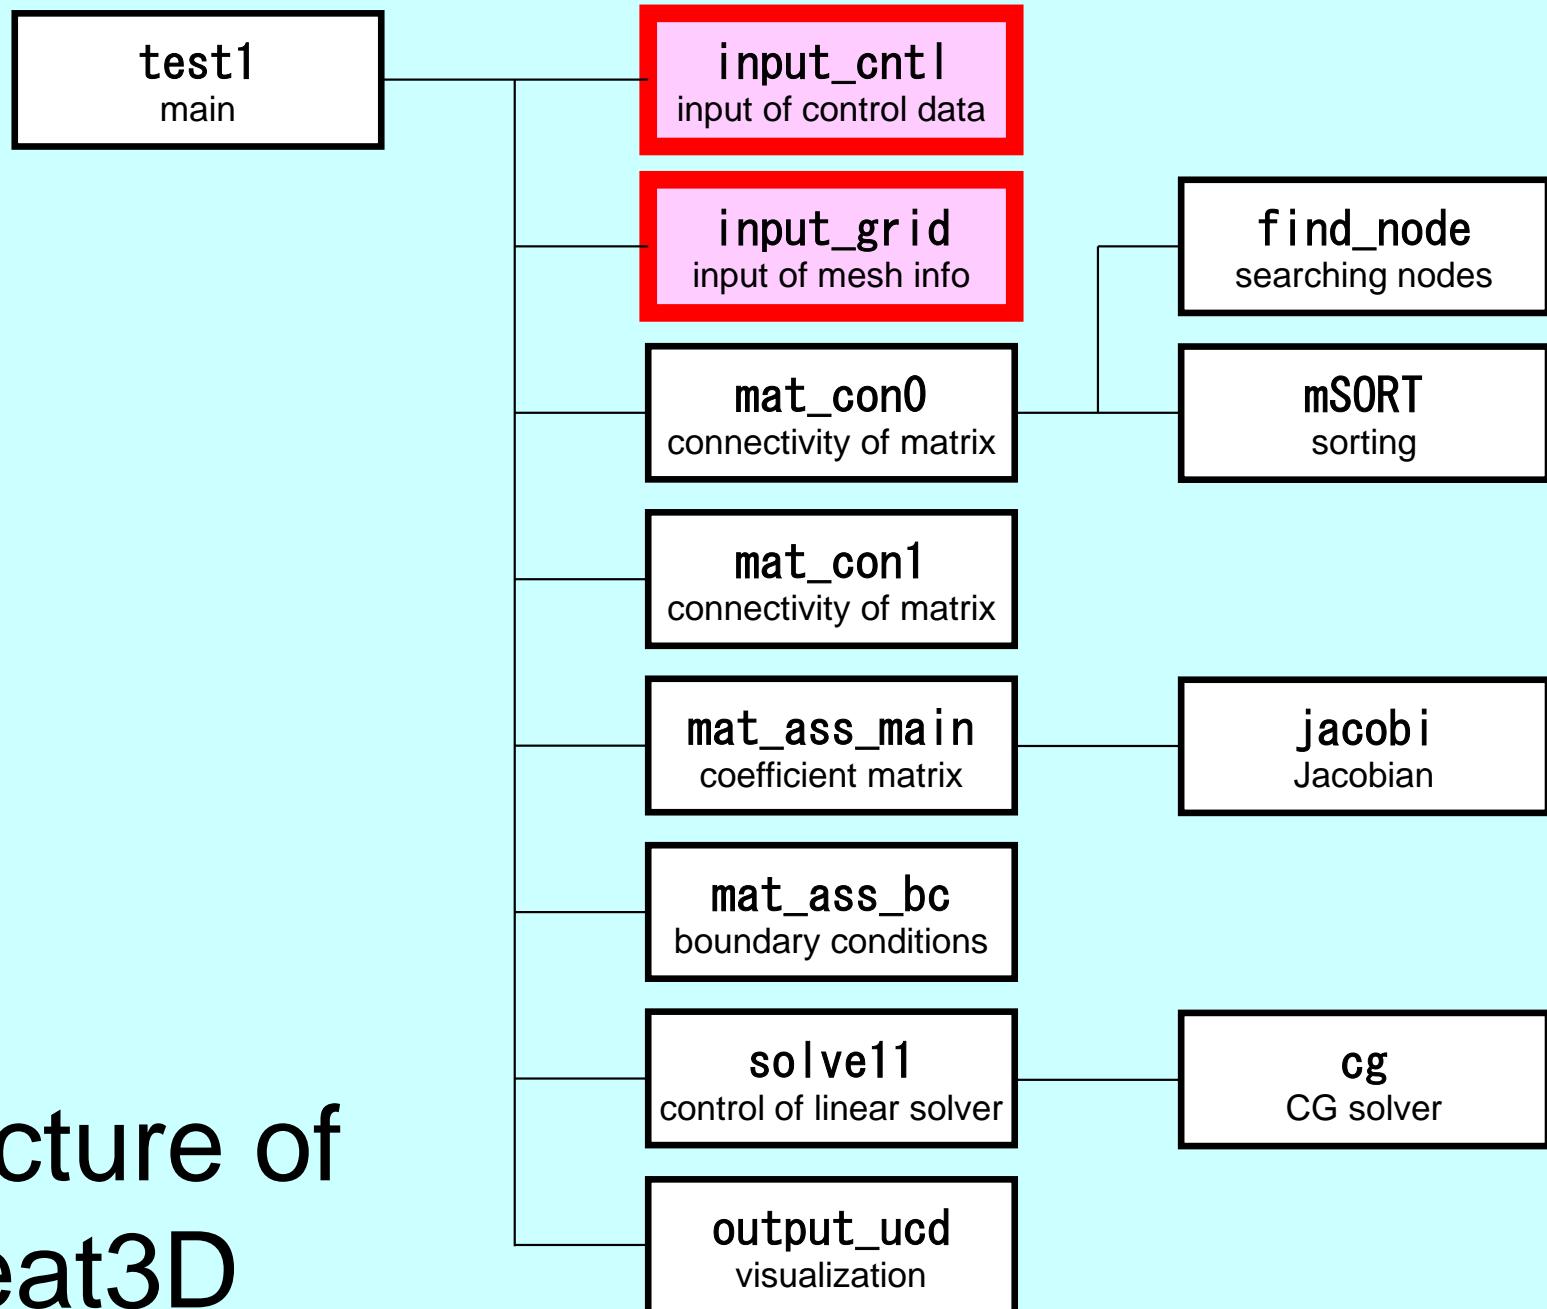

# Main Part

```
program heat3D

use solver11
use pfem_util

implicit REAL*8 (A-H, 0-Z)

call INPUT_CNTL
call INPUT_GRID

call MAT_CONO
call MAT_CON1

call MAT_ASS_MAIN
call MAT_ASS_BC

call SOLVE11

call OUTPUT_UCD

do i= 1, N
  if (XYZ(i, 1). eq. 0. d0. and. XYZ(i, 2). eq. 0. d0
&                                . and. XYZ(i, 3). eq. 0. d0) then
    write (*, '(i8, 1pe16.6)') i, X(i)
  endif
enddo

end program heat3D
```

# Global Variables: pfem\_util.f (1/3)

Name	Type	Size	I/O	Definition
<b>fname</b>	C	( 80 )	I	Name of mesh file
<b>N,NP</b>	I		I	# Node
<b>ICELTOT</b>	I		I	# Element
<b>NODGRPtot</b>	I		I	# Node Group
<b>XYZ</b>	R	( N , 3 )	I	Node Coordinates
<b>ICELNOD</b>	I	( ICELTOT , 8 )	I	Element Connectivity
<b>NODGRP_INDEX</b>	I	( 0 : NODGRPtot )	I	# Node in each Node Group
<b>NODGRP_ITEM</b>	I	( NODGRP_INDEX( N ODGRPTOT ) )	I	Node ID in each Node Group
<b>NODGRP_NAME</b>	C80	( NODGRP_INDEX( N ODGRPTOT ) )	I	Name of NodeGroup
<b>NLU</b>	I		O	# Non-Zero Off-Diagonals at each node
<b>NPLU</b>	I		O	# Non-Zero Off-Diagonals
<b>D</b>	R	( N )	O	Diagonal Block of Global Matrix
<b>B,X</b>	R	( N )	O	RHS, Unknown Vector

# Global Variables: pfem\_util.h (2/3)

Name	Type	Size	I/O	Definition
<b>AMAT</b>	R	(NPLU)	O	Non-Zero Off-Diagonal Components of Global Matrix
<b>index</b>	I	(0:N)	O	# Non-Zero Off-Diagonal Components
<b>item</b>	I	(NPLU)	O	Column ID of Non-Zero Off-Diagonal Components
<b>INLU</b>	I	(N)	O	Number of Non-Zero Off-Diagonal Components at Each Node
<b>IALU</b>	I	(N,NLU)	O	Column ID of Non-Zero Off-Diagonal Components at Each Node
<b>IWKX</b>	I	(N, 2)	O	Work Arrays
<b>ITER, ITERactual</b>	I		I	Number of CG Iterations (MAX, Actual)
<b>RESID</b>	R		I	Convergence Criteria (fixed as 1.e-8)
<b>pfemIarray</b>	I	(100)	O	Integer Parameter Array
<b>pfemRarray</b>	R	(100)	O	Real Parameter Array

# Global Variables: pfem\_util.h (3/3)

Name	Type	Size	I/O	Definition
<b>O8th</b>	R		I	= 0.125
<b>PNQ, PNE, PNT</b>	R	( 2 , 2 , 8 )	O	$\frac{\partial N_i}{\partial \xi}, \frac{\partial N_i}{\partial \eta}, \frac{\partial N_i}{\partial \zeta}$ ( $i = 1 \sim 8$ ) at each Gaussian Quad. Point
<b>POS, WEI</b>	R	( 2 )	O	Coordinates, Weighting Factor at each Gaussian Quad. Point
<b>NCOL1, NCOL2</b>	I	( 100 )	O	Work arrays for sorting
<b>SHAPE</b>	R	( 2 , 2 , 2 , 8 )	O	$N_i$ ( $i = 1 \sim 8$ ) at each Gaussian Quad Point
<b>PNX, PNY, PNZ</b>	R	( 2 , 2 , 2 , 8 )	O	$\frac{\partial N_i}{\partial x}, \frac{\partial N_i}{\partial y}, \frac{\partial N_i}{\partial z}$ ( $i = 1 \sim 8$ ) at each Gaussian Quad. Point
<b>DETJ</b>	R	( 2 , 2 , 2 )	O	Determinant of Jacobian Matrix at each Gaussian Quad. Point
<b>COND, QVOL</b>	R		I	Thermal Conductivity, Heat Generation Rate

$$\frac{\partial}{\partial x} \left( \lambda \frac{\partial T}{\partial x} \right) + \frac{\partial}{\partial y} \left( \lambda \frac{\partial T}{\partial y} \right) + \frac{\partial}{\partial z} \left( \lambda \frac{\partial T}{\partial z} \right) + \dot{Q}(x, y, z) = 0$$

$$\dot{Q}(x, y, z) = QVOL |x_c + y_c|$$

# INPUT\_CNTL: Control Data

```
subroutine INPUT_CNTL
use pfem_util

implicit REAL*8 (A-H, 0-Z)

open (11, file= ' INPUT.DAT', status=' unknown')
read (11, '(a80)' ) fname
read (11, *) ITER
read (11, *) COND, QVOL
read (11, *) RESID
close (11)

pfemIarray(1)= ITER
pfemRarray(1)= RESID

return
end
```

## INPUT.DAT

cube.0	fname
2000	ITER
1.0 1.0	COND, QVOL
1.0e-08	RESID


# INPUT\_GRID (1/3)

```
!C***  
!C*** INPUT_GRID  
!C***  
!C  
    subroutine INPUT_GRID  
    use pfem_util  
    implicit REAL*8 (A-H, 0-Z)  
  
    open (11, file= fname, status= 'unknown', form= 'formatted')  
  
!C  
!C-- NODE  
    read (11, *) N  
    NP= N  
  
    allocate (XYZ(N, 3))  
    XYZ= 0.d0  
    do i= 1, N  
        read (11, *) i i, (XYZ(i, kk), kk=1, 3)  
    enddo
```

# Example of “cube.0” Node

125				= N
1	0.00	0.00	0.00	
2	1.00	0.00	0.00	
3	2.00	0.00	0.00	
4	3.00	0.00	0.00	
5	4.00	0.00	0.00	
6	0.00	1.00	0.00	
7	1.00	1.00	0.00	
8	2.00	1.00	0.00	
9	3.00	1.00	0.00	
...				
121	0.00	4.00	4.00	
122	1.00	4.00	4.00	
123	2.00	4.00	4.00	
124	3.00	4.00	4.00	
125	4.00	4.00	4.00	

XYZ(i, 3)

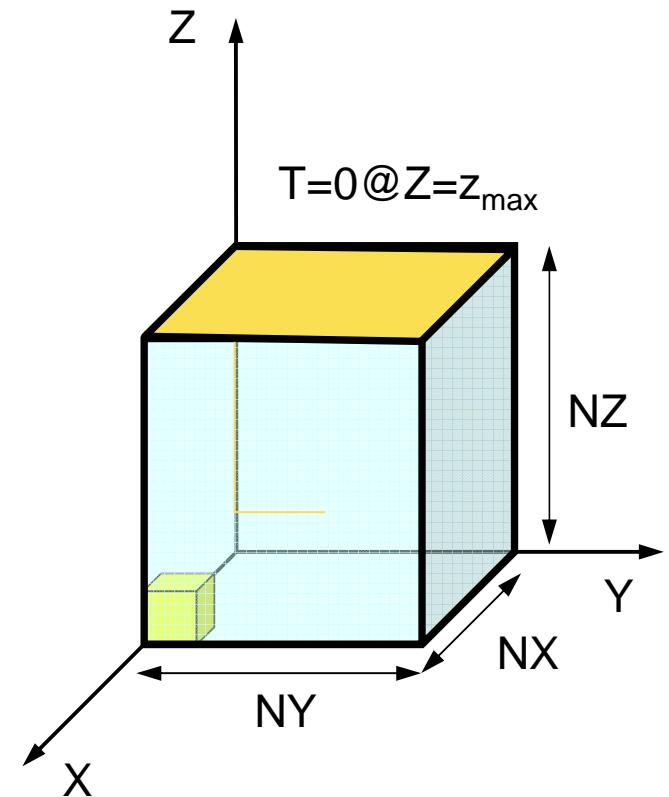

# allocate, deallocate (1/2)

Same interface with FORTRAN

```
#include <stdio.h>
#include <stdlib.h>

void* allocate_vector(int size, int m)
{
    void *a;
    if ( ( a=(void *)malloc( m * size ) ) == NULL ) {
        fprintf(stdout,"Error:Memory does not enough! in vector \n");
        exit(1);
    }
    return a;
}

void deallocate_vector(void *a)
{
    free( a );
}
```

```
INDEX=(KINT*) allocate_vector(sizeof(KINT), NGtot+1); INDEX[Ngtot+1]
NAME =(CHAR80*) allocate_vector(sizeof(CHAR80), NGtot); NAME[NGtot]
WW=(KREAL**) allocate_matrix(sizeof(KREAL), 4, N); WW[4][N]
```

# allocate, deallocate (2/2)

Same interface with FORTRAN

```
void** allocate_matrix(int size, int m, int n)
{
    void **aa;
    int i;
    if ( ( aa=(void **)malloc( m * sizeof(void*) ) ) == NULL ) {
        fprintf(stdout,"Error:Memory does not enough! aa in matrix %n");
        exit(1);
    }
    if ( ( aa[0]=(void *)malloc( m * n * size ) ) == NULL ) {
        fprintf(stdout,"Error:Memory does not enough! in matrix %n");
        exit(1);
    }
    for(i=1;i<m;i++) aa[i]=(char*)aa[i-1]+size*n;
    return aa;
}

void deallocate_matrix(void **aa)
{
    free( aa );
}
```

```
INDEX=(KINT*) allocate_vector(sizeof(KINT), NGtot+1); INDEX[Ngtot+1]
NAME =(CHAR80*) allocate_vector(sizeof(CHAR80), NGtot); NAME[NGtot]
WW=(KREAL**) allocate_matrix(sizeof(KREAL), 4, N); WW[4][N]
```

# INPUT\_GRID (2/3)

```
!C
!C-- ELEMENT
read (11,*) ICELTOT
allocate (ICELNOD(ICELTOT, 8))
read (11, '(10i10)') (NTYPE, i= 1, ICELTOT)

do icel= 1, ICELTOT
    read (11, '(10i10, 2i5, 8i8)') ii, IMAT, (ICELNOD(icel, k), k=1, 8)
enddo
```


# Example of “cube.0” Element (1/2)

64

= ICELTOT

361	361	361	361	361	361	361	361	361	361	361	361
361	361	361	361	361	361	361	361	361	361	361	361
361	361	361	361	361	361	361	361	361	361	361	361
361	361	361	361	361	361	361	361	361	361	361	361
361	361	361	361	361	361	361	361	361	361	361	361
361	361	361	361	361	361	361	361	361	361	361	361
361	361	361	361	361	361	361	361	361	361	361	361
361	361	361	361	361	361	361	361	361	361	361	361

Element Type: 361  
3D, Hexahedron, Linear (1<sup>st</sup> order)


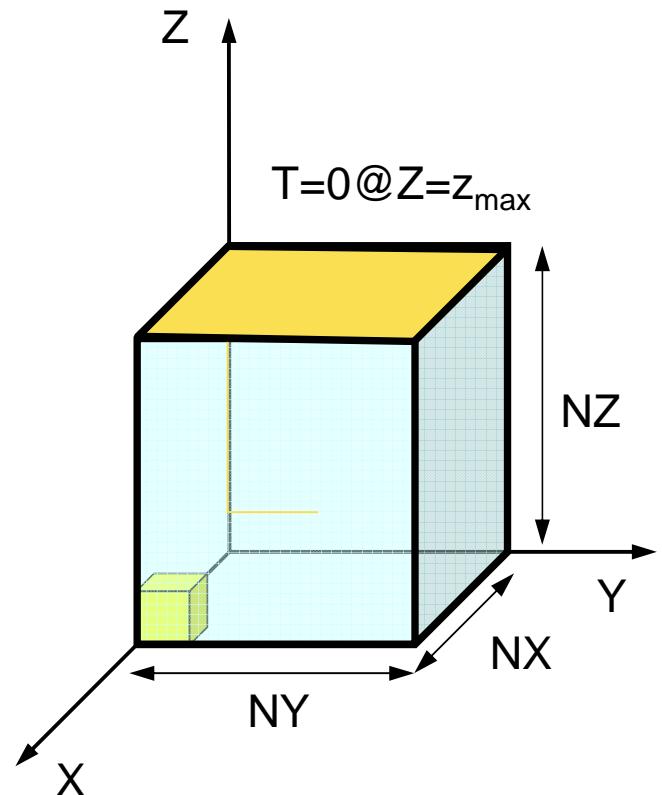


# Example of “cube.0” Element (2/2)

1	1	1	2	7	6	26	27	32	31
2	1	2	3	8	7	27	28	33	32
3	1	3	4	9	8	28	29	34	33
4	1	4	5	10	9	29	30	35	34
5	1	6	7	12	11	31	32	37	36
6	1	7	8	13	12	32	33	38	37
7	1	8	9	14	13	33	34	39	38
8	1	9	10	15	14	34	35	40	39
9	1	11	12	17	16	36	37	42	41
10	1	12	13	18	17	37	38	43	42
11	1	13	14	19	18	38	39	44	43
12	1	14	15	20	19	39	40	45	44
13	1	16	17	22	21	41	42	47	46
.	.	.	.	.	.	.	.	.	.
53	1	81	82	87	86	106	107	112	111
54	1	82	83	88	87	107	108	113	112
55	1	83	84	89	88	108	109	114	113
56	1	84	85	90	89	109	110	115	114
57	1	86	87	92	91	111	112	117	116
58	1	87	88	93	92	112	113	118	117
59	1	88	89	94	93	113	114	119	118
60	1	89	90	95	94	114	115	120	119
61	1	91	92	97	96	116	117	122	121
62	1	92	93	98	97	117	118	123	122
63	1	93	94	99	98	118	119	124	123
64	1	94	95	100	99	119	120	125	124

iMAT

ICELNOD(ice1, 8)

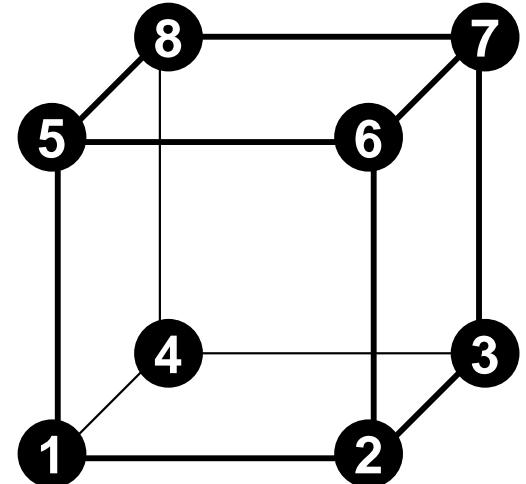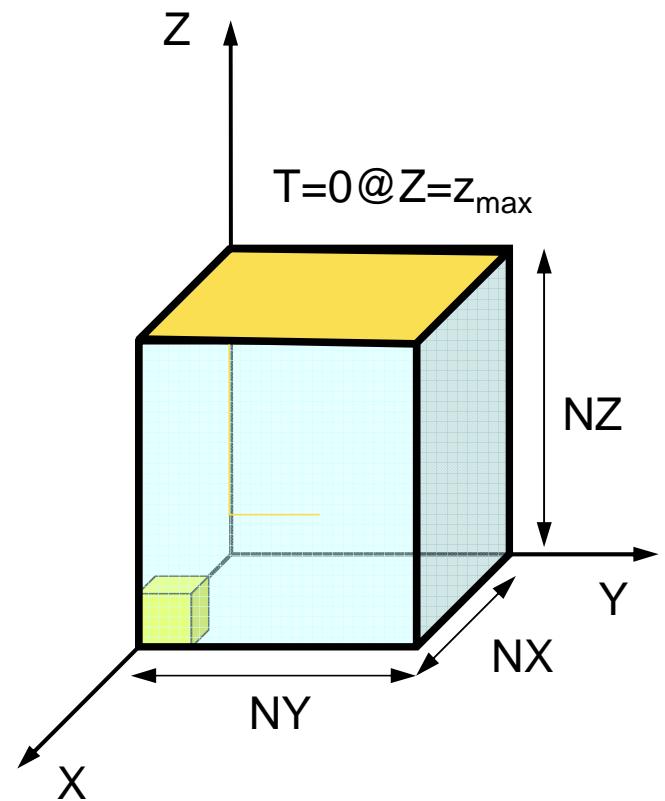

# INPUT\_GRID (3/3)

```
!C
!C-- NODE grp. info.
read (11, '(10i10)' ) NODGRPtot
allocate (NODGRP_INDEX(0:NODGRPtot) , NODGRP_NAME(NODGRPtot) )
NODGRP_INDEX= 0

read (11, '(10i10)' ) (NODGRP_INDEX(i), i= 1, NODGRPtot)
nn= NODGRP_INDEX(NODGRPtot)
allocate (NODGRP_ITEM(nn))


do k= 1, NODGRPtot
  iS= NODGRP_INDEX(k-1) + 1
  iE= NODGRP_INDEX(k)
  read (11, '(a80)' ) NODGRP_NAME(k)
  nn= iE - iS + 1
  if (nn.ne.0) then
    read (11, '(10i10)' ) (NODGRP_ITEM(kk), kk=iS, iE)
  endif
enddo

close (11)

return
end
```

# Example of “cube.0” Node Grp. Info.

# Structure of heat3D

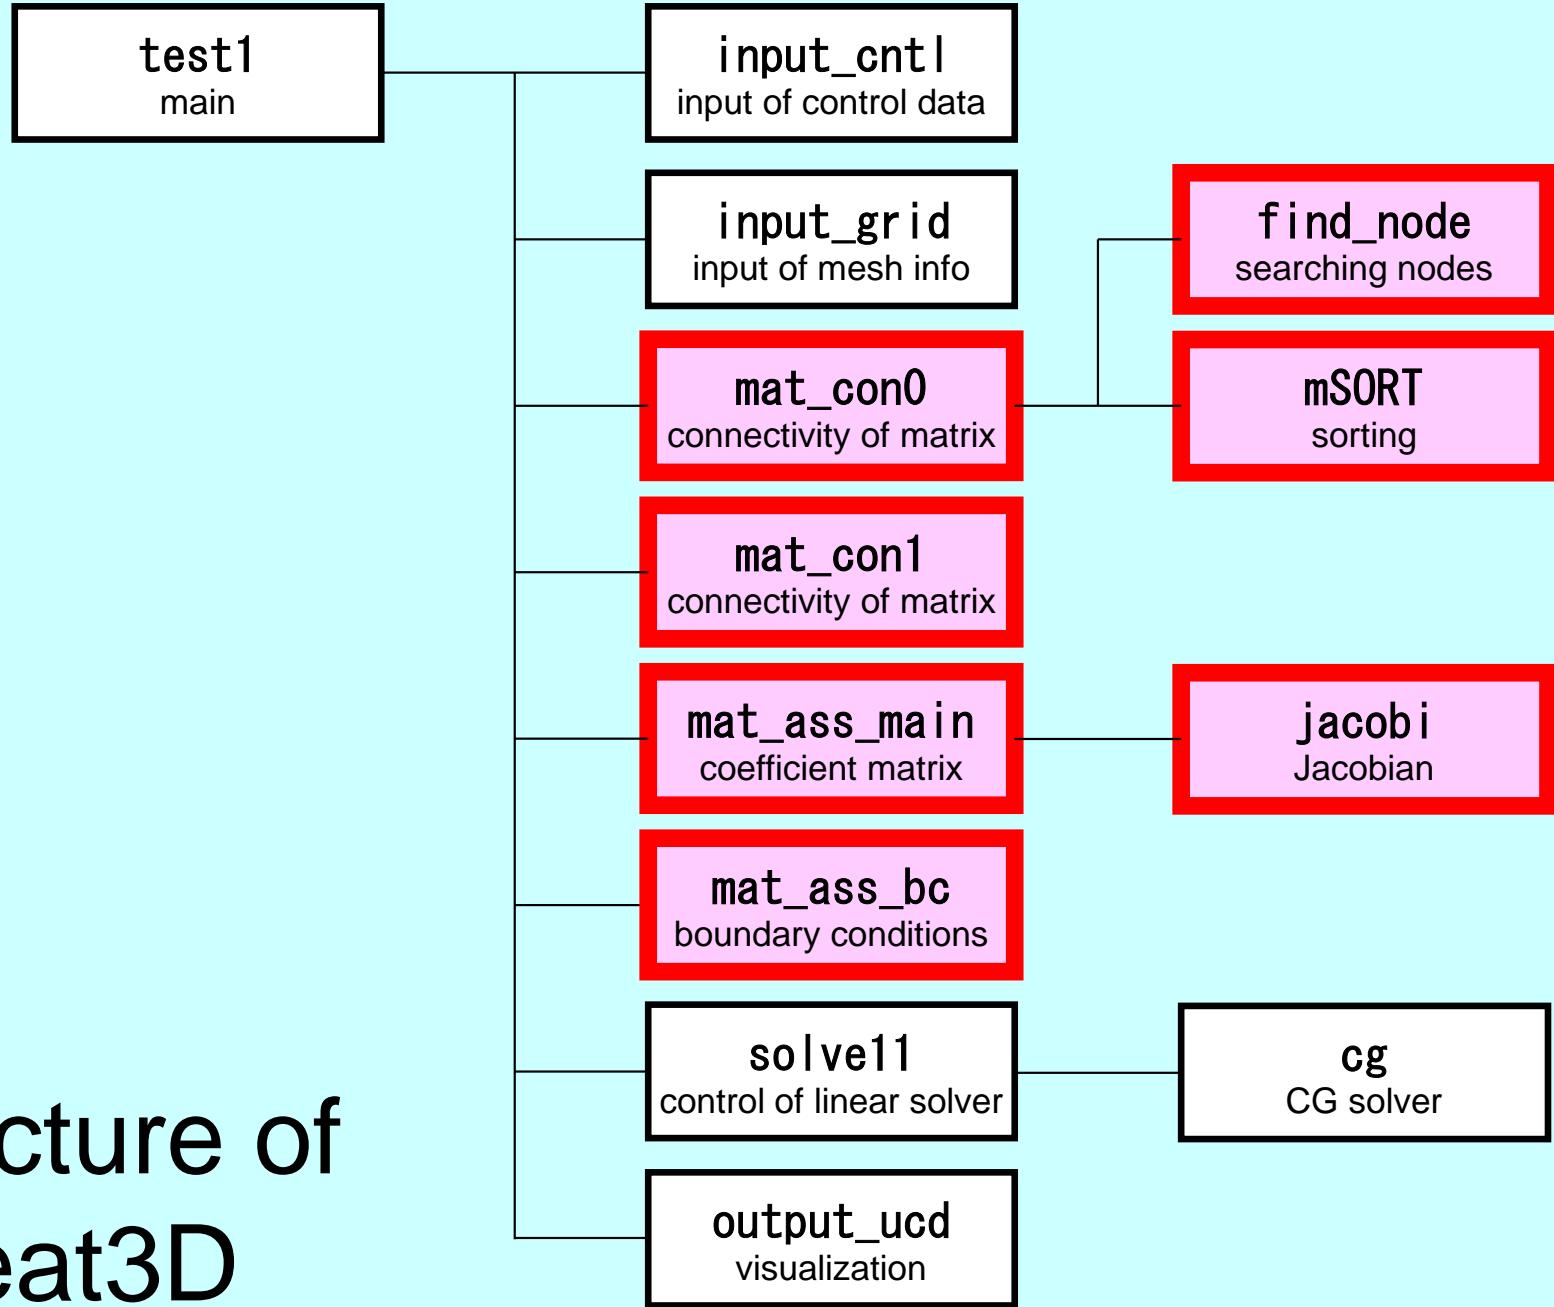

# Global Variables: pfem\_util.f (1/3)

Name	Type	Size	I/O	Definition
<b>fname</b>	C	( 80 )	I	Name of mesh file
<b>N,NP</b>	I		I	# Node
<b>ICELTOT</b>	I		I	# Element
<b>NODGRPtot</b>	I		I	# Node Group
<b>XYZ</b>	R	( N , 3 )	I	Node Coordinates
<b>ICELNOD</b>	I	( ICELTOT , 8 )	I	Element Connectivity
<b>NODGRP_INDEX</b>	I	( 0 : NODGRPtot )	I	# Node in each Node Group
<b>NODGRP_ITEM</b>	I	( NODGRP_INDEX( N ODGRPTOT ) )	I	Node ID in each Node Group
<b>NODGRP_NAME</b>	C80	( NODGRP_INDEX( N ODGRPTOT ) )	I	Name of NodeGroup
<b>NLU</b>	I		O	# Non-Zero Off-Diagonals at each node
<b>NPLU</b>	I		O	# Non-Zero Off-Diagonals
<b>D</b>	R	( N )	O	Diagonal Block of Global Matrix
<b>B,X</b>	R	( N )	O	RHS, Unknown Vector

# Global Variables: pfem\_util.f (2/3)

Name	Type	Size	I/O	Definition
<b>AMAT</b>	R	(NPLU)	O	Non-Zero Off-Diagonal Components of Global Matrix
<b>index</b>	I	(0:N)	O	# Non-Zero Off-Diagonal Components
<b>item</b>	I	(NPLU)	O	Column ID of Non-Zero Off-Diagonal Components
<b>INLU</b>	I	(N)	O	Number of Non-Zero Off-Diagonal Components at Each Node
<b>IALU</b>	I	(N,NLU)	O	Column ID of Non-Zero Off-Diagonal Components at Each Node
<b>IWKX</b>	I	(N, 2)	O	Work Arrays
<b>ITER, ITERactual</b>	I		I	Number of CG Iterations (MAX, Actual)
<b>RESID</b>	R		I	Convergence Criteria (fixed as 1.e-8)
<b>pfemIarray</b>	I	(100)	O	Integer Parameter Array
<b>pfemRarray</b>	R	(100)	O	Real Parameter Array

# Global Variables: pfem\_util.f (3/3)

Name	Type	Size	I/O	Definition
<b>O8th</b>	R		I	= 0.125
<b>PNQ, PNE, PNT</b>	R	( 2 , 2 , 8 )	O	$\frac{\partial N_i}{\partial \xi}, \frac{\partial N_i}{\partial \eta}, \frac{\partial N_i}{\partial \zeta}$ ( $i = 1 \sim 8$ ) at each Gaussian Quad. Point
<b>POS, WEI</b>	R	( 2 )	O	Coordinates, Weighting Factor at each Gaussian Quad. Point
<b>NCOL1, NCOL2</b>	I	( 100 )	O	Work arrays for sorting
<b>SHAPE</b>	R	( 2 , 2 , 2 , 8 )	O	$N_i$ ( $i = 1 \sim 8$ ) at each Gaussian Quad Point
<b>PNX, PNY, PNZ</b>	R	( 2 , 2 , 2 , 8 )	O	$\frac{\partial N_i}{\partial x}, \frac{\partial N_i}{\partial y}, \frac{\partial N_i}{\partial z}$ ( $i = 1 \sim 8$ ) at each Gaussian Quad. Point
<b>DETJ</b>	R	( 2 , 2 , 2 )	O	Determinant of Jacobian Matrix at each Gaussian Quad. Point
<b>COND, QVOL</b>	R		I	Thermal Conductivity, Heat Generation Rate

$$\frac{\partial}{\partial x} \left( \lambda \frac{\partial T}{\partial x} \right) + \frac{\partial}{\partial y} \left( \lambda \frac{\partial T}{\partial y} \right) + \frac{\partial}{\partial z} \left( \lambda \frac{\partial T}{\partial z} \right) + \dot{Q}(x, y, z) = 0$$

$$\dot{Q}(x, y, z) = QVOL |x_c + y_c|$$

# Towards Matrix Assembling

- In 1D, it was easy to obtain information related to index and item.
  - 2 non-zero off-diagonals for each node
  - ID of non-zero off-diagonal :  $i+1, i-1$ , where “ $i$ ” is node ID
- In 3D, situation is more complicated:
  - Number of non-zero off-diagonal components is between 7 and 26 for the current target problem
  - More complicated for real problems.
  - Generally, there are no information related to number of non-zero off-diagonal components beforehand.

movie

# Towards Matrix Assembling

- In 1D, it was easy to obtain information related to index and item.
  - 2 non-zero off-diagonals for each node
  - ID of non-zero off-diagonal :  $i+1, i-1$ , where “ $i$ ” is node ID
- In 3D, situation is more complicated:
  - Number of non-zero off-diagonal components is between 7 and 26 for the current target problem
  - More complicated for real problems.
  - Generally, there are no information related to number of non-zero off-diagonal components beforehand.
- **Count number of non-zero off-diagonals using arrays: INLU[N], IALU[N][NLU]**

# Main Part

```
program heat3D
use solver11
use pfem_util

implicit REAL*8(A-H, 0-Z)

call INPUT_CNTL
call INPUT_GRID


call MAT_CON0
call MAT_CON1

call MAT_ASS_MAIN
call MAT_ASS_BC

call SOLVE11

call OUTPUT_UCD

end program heat3D
```

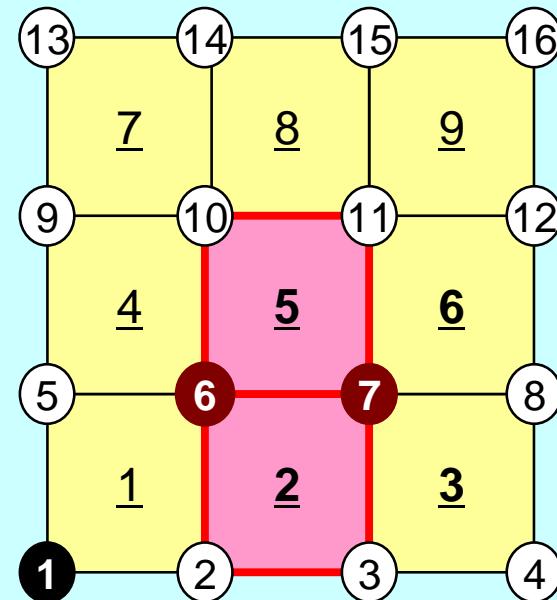

MAT\_CON0: generates INU, IALU  
MAT\_CON1: generates index, item



Node ID starting from “1”

# MAT\_CON0: Overview

```

do icel= 1, ICELTOT
  generate INLU, IALU
  according to 8 nodes of hex. elements
  (FIND_NODE)
enddo

```

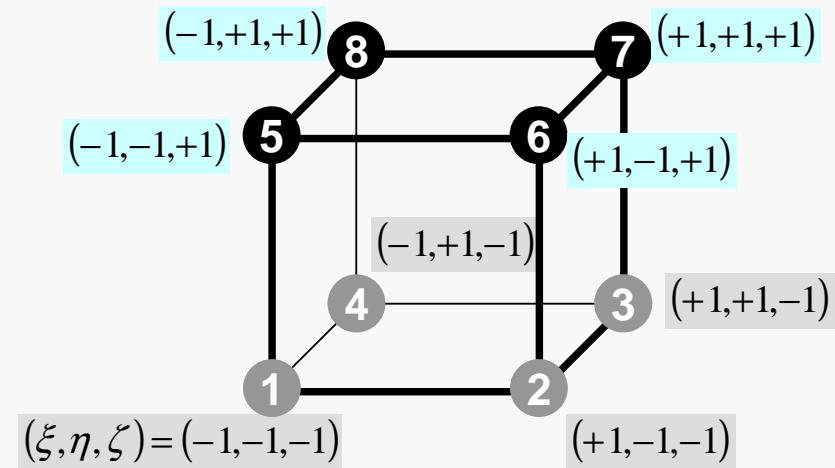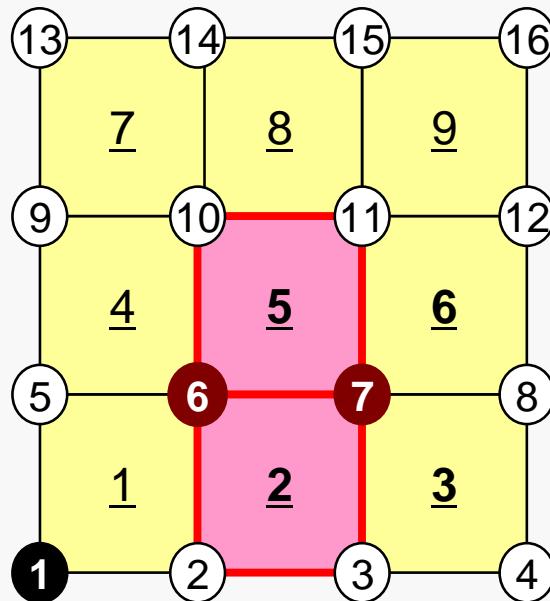

# Generating Connectivity of Matrix MAT\_CONO (1/4)

```
!C
!C***
!C*** MAT_CONO
!C***
!C
    subroutine MAT_CONO
    use pfem_util
    implicit REAL*8 (A-H, O-Z)

    NLU= 26

    allocate (INLU(N), IALU(N, NLU))

    INLU= 0
    IALU= 0
```

## NLU:

Number of maximum number of connected nodes to each node (number of upper/lower non-zero off-diagonal nodes)

In the current problem, geometry is rather simple. Therefore we can specify NLU in this way.

If it's not clear ->  
Try more flexible implementation

# Why NLU=26 ?


Max Number of Neighboring Nodes  
 $9+8+9 = 26$

## NLU:

Number of maximum number of connected nodes to each node (number of upper/lower non-zero off-diagonal nodes)

In the current problem, geometry is rather simple. Therefore we can specify NLU in this way.

If it's not clear ->  
Try more flexible implementation

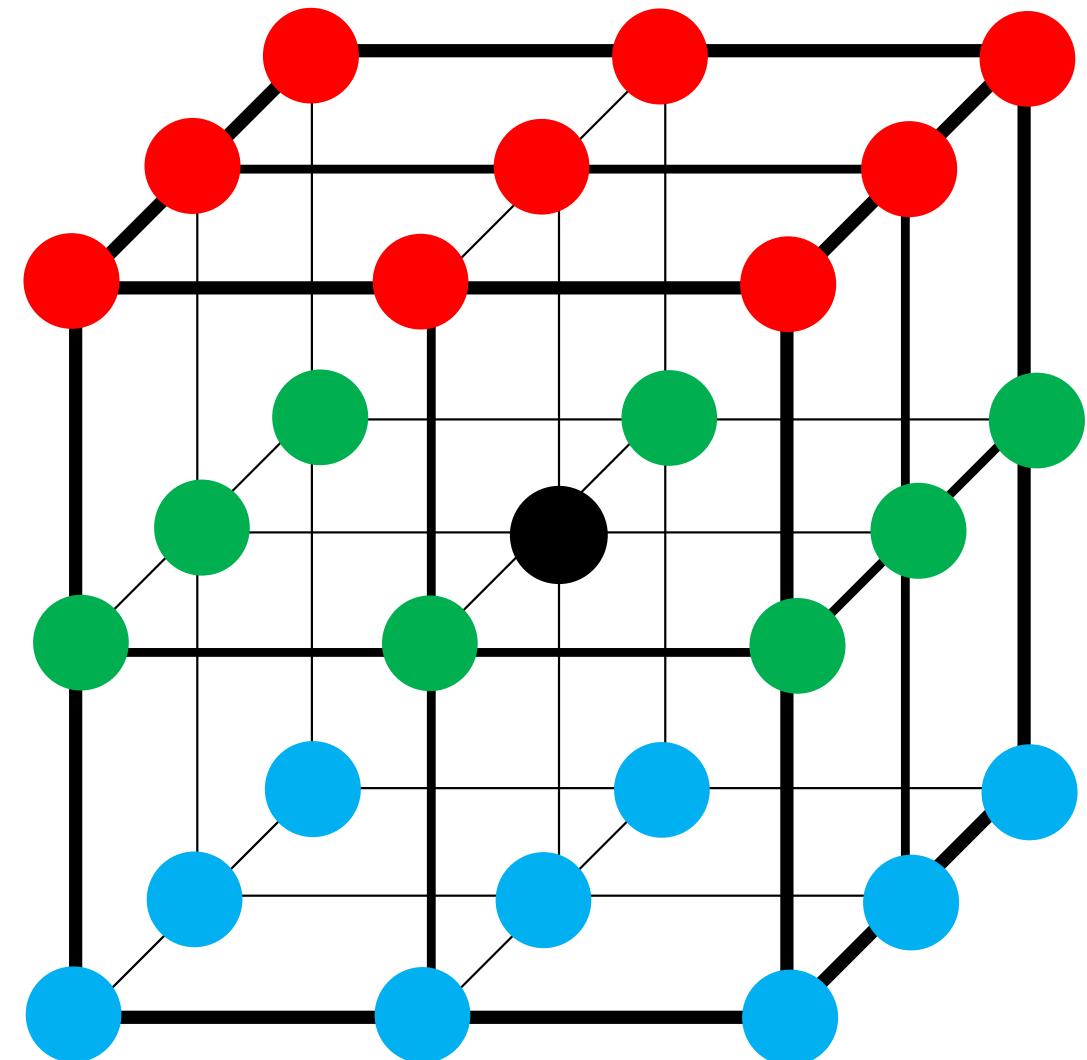

# Generating Connectivity of Matrix MAT\_CONO (1/4)

```
!C
!C***
!C*** MAT_CONO
!C***
!C
      subroutine MAT_CONO
      use pfem_util
      implicit REAL*8 (A-H, O-Z)

      NLU= 26

      allocate (INLU(N), IALU(N, NLU))

      INLU= 0
      IALU= 0
```

Array	Size	Description
INLU	(N)	Number of connected nodes to each node (lower/upper)
IALU	(N, NLU)	Corresponding connected node ID (column ID)

# Generating Connectivity of Matrix MAT\_CON0 (2/4): Starting from 1

```


do icel= 1, ICELTOT
in1= ICELNOD(icel, 1)
in2= ICELNOD(icel, 2)
in3= ICELNOD(icel, 3)
in4= ICELNOD(icel, 4)
in5= ICELNOD(icel, 5)
in6= ICELNOD(icel, 6)
in7= ICELNOD(icel, 7)
in8= ICELNOD(icel, 8)

call FIND_TS_NODE (in1, in2)
call FIND_TS_NODE (in1, in3)
call FIND_TS_NODE (in1, in4)
call FIND_TS_NODE (in1, in5)
call FIND_TS_NODE (in1, in6)
call FIND_TS_NODE (in1, in7)
call FIND_TS_NODE (in1, in8)

call FIND_TS_NODE (in2, in1)
call FIND_TS_NODE (in2, in3)
call FIND_TS_NODE (in2, in4)
call FIND_TS_NODE (in2, in5)
call FIND_TS_NODE (in2, in6)
call FIND_TS_NODE (in2, in7)
call FIND_TS_NODE (in2, in8)

call FIND_TS_NODE (in3, in1)
call FIND_TS_NODE (in3, in2)
call FIND_TS_NODE (in3, in4)
call FIND_TS_NODE (in3, in5)
call FIND_TS_NODE (in3, in6)
call FIND_TS_NODE (in3, in7)
call FIND_TS_NODE (in3, in8)

```

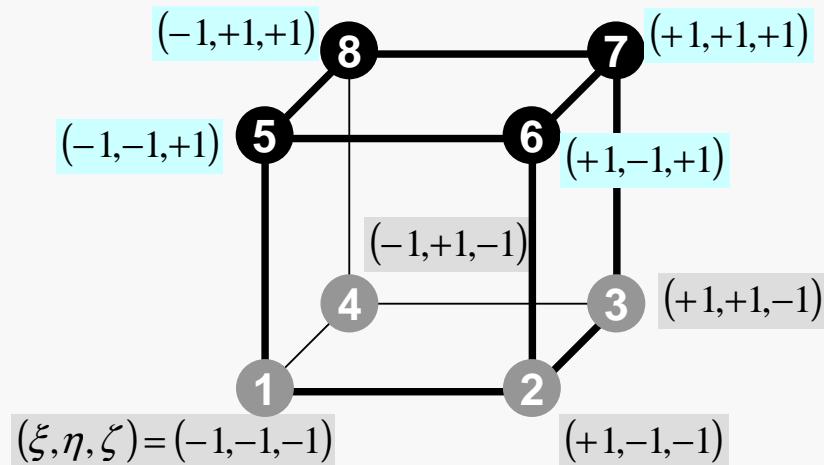

# FIND\_TS\_NODE: Search Connectivity

## INLU,IALU: Automatic Search

```

!C
!C*** FIND_TS_NODE
!C*** subroutine FIND_TS_NODE (ip1, ip2)
      do kk= 1, INLU(ip1)
         if (ip2.eq. IALU(ip1, kk)) return
      enddo
      icou= INLU(ip1) + 1
      IALU(ip1, icou)= ip2
      INLU(ip1      )= icou
      return
end subroutine FIND_TS_NODE

```

Array	Size	Description
INLU	(N)	Number of connected nodes to each node (lower/upper)
IALU	(N, NLU)	Corresponding connected node ID (column ID)

# FIND\_TS\_NODE: Search Connectivity

## INLU,IALU: Automatic Search, #2 Element


```

!C
!C*** FIND_TS_NODE
!C*** subroutine FIND_TS_NODE (ip1, ip2)
    do kk= 1, INLU(ip1)
        if (ip2.eq. IALU(ip1, kk)) return
    enddo
    icou= INLU(ip1) + 1
    IALU(ip1, icou)= ip2
    INLU(ip1      )= icou
    return
end subroutine FIND_TS_NODE

```

ip1: No.6 node  
ip2: No.7 node

Checking whether “ip2” is already included in IALU(ip1,kk), or not

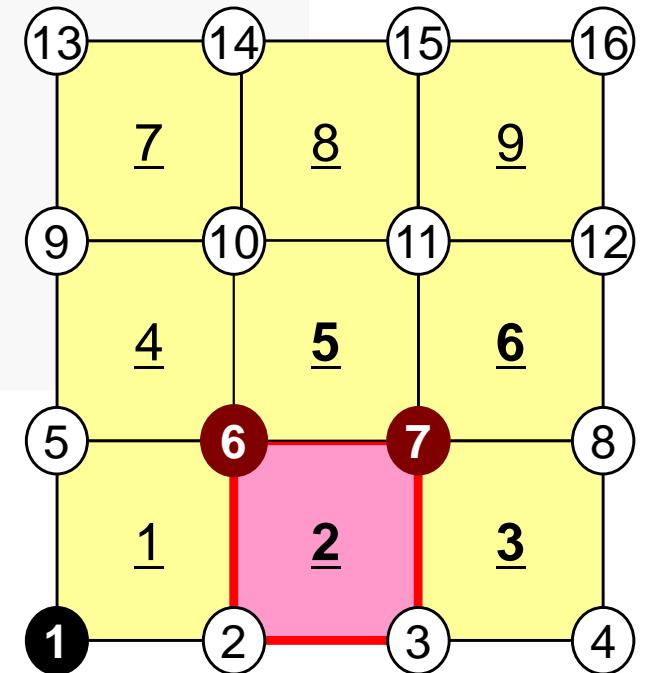

# FIND\_TS\_NODE: Search Connectivity

INLU,IALU: Automatic Search, **#2 Element**

```

!C
!C*** FIND_TS_NODE
!C***
```

If the target node is NOT included in IALU, store the node in IALU, and add 1 to INLU.


subroutine FIND\_TS\_NODE (ip1, ip2)

```

do kk= 1, INLU(ip1)
    if (ip2.eq. IALU(ip1,kk)) return
enddo
icou= INLU(ip1) + 1
IALU(ip1, icou)= ip2
INLU(ip1) = icou
return
```

end subroutine FIND\_TS\_NODE

ip1: No.6 node  
ip2: No.7 node

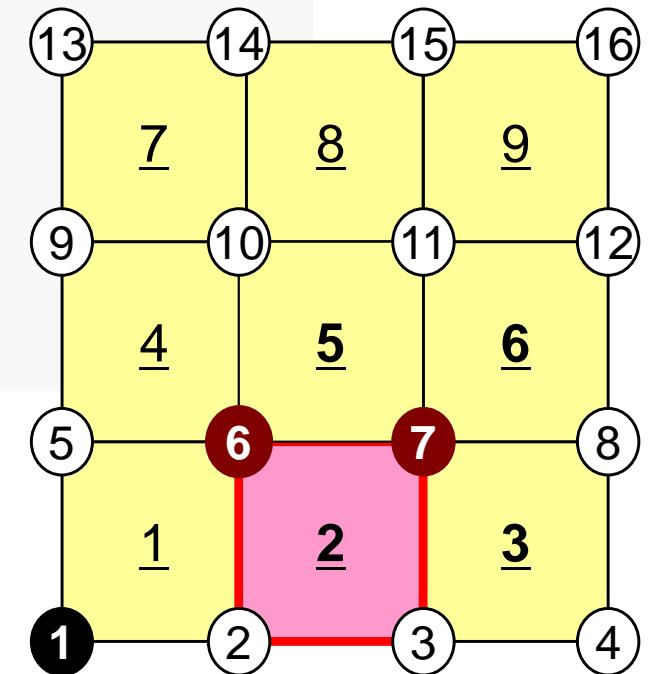

# FIND\_TS\_NODE: Search Connectivity

## INLU,IALU: Automatic Search, #5 Element


```

!C
!C*** FIND_TS_NODE
!C*** subroutine FIND_TS_NODE (ip1, ip2)
    do kk= 1, INLU(ip1)
        if (ip2.eq. IALU(ip1, kk)) return
    enddo
    icou= INLU(ip1) + 1
    IALU(ip1, icou)= ip2
    INLU(ip1      )= icou
    return
end subroutine FIND_TS_NODE

```

ip1: No.6 node  
ip2: No.7 node

If the target node is already included in IALU, proceed to next pair of nodes

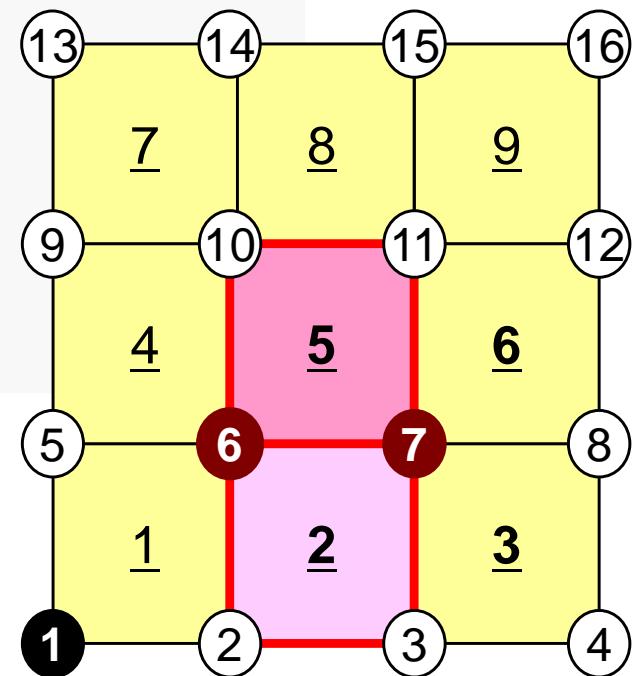

# Generating Connectivity of Matrix MAT\_CONO (3/4)

```


call FIND_TS_NODE (in4, in1)
call FIND_TS_NODE (in4, in2)
call FIND_TS_NODE (in4, in3)
call FIND_TS_NODE (in4, in5)
call FIND_TS_NODE (in4, in6)
call FIND_TS_NODE (in4, in7)
call FIND_TS_NODE (in4, in8)

call FIND_TS_NODE (in5, in1)
call FIND_TS_NODE (in5, in2)
call FIND_TS_NODE (in5, in3)
call FIND_TS_NODE (in5, in4)
call FIND_TS_NODE (in5, in6)
call FIND_TS_NODE (in5, in7)
call FIND_TS_NODE (in5, in8)

call FIND_TS_NODE (in6, in1)
call FIND_TS_NODE (in6, in2)
call FIND_TS_NODE (in6, in3)
call FIND_TS_NODE (in6, in4)
call FIND_TS_NODE (in6, in5)
call FIND_TS_NODE (in6, in7)
call FIND_TS_NODE (in6, in8)

call FIND_TS_NODE (in7, in1)
call FIND_TS_NODE (in7, in2)
call FIND_TS_NODE (in7, in3)
call FIND_TS_NODE (in7, in4)
call FIND_TS_NODE (in7, in5)
call FIND_TS_NODE (in7, in6)
call FIND_TS_NODE (in7, in8)

```

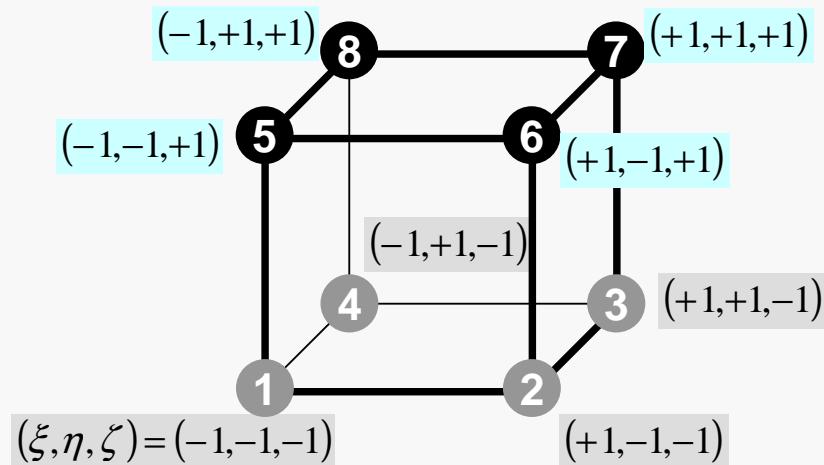

# Generating Connectivity of Matrix MAT\_CONO (4/4)

```
call FIND_TS_NODE (in8, in1)
call FIND_TS_NODE (in8, in2)
call FIND_TS_NODE (in8, in3)
call FIND_TS_NODE (in8, in4)
call FIND_TS_NODE (in8, in5)
call FIND_TS_NODE (in8, in6)
call FIND_TS_NODE (in8, in7)
enddo

do in= 1, N
  NN= INLU(in)
  do k= 1, NN
    NCOL1(k)= IALU(in, k)
  enddo
  call mSORT (NCOL1, NCOL2, NN)
  do k= NN, 1, -1
    IALU(in, NN-k+1)= NCOL1(NCOL2(k))
  enddo
enddo
```

Sort IALU(i,k) in ascending order by “bubble” sorting for less than 100 components.

# MAT\_CON1: CRS format

```

!C
!C***  

!C*** MAT_CON1  

!C***  

!C
  subroutine MAT_CON1
  use pfem_util
  implicit REAL*8 (A-H, 0-Z)

  allocate (index(0:N))
  index= 0

  do i= 1, N
    index(i)= index(i-1) + INLU(i)
  enddo

  NPLU= index(N)

  allocate (item(NPLU))

  do i= 1, N
    do k= 1, INLU(i)
      kk = k + index(i-1)
      item(kk)= IALU(i, k)
    enddo
  enddo

  deallocate (INLU, IALU)

end subroutine MAT_CON1

```

C

$$\text{index}[i+1] = \sum_{k=0}^i \text{INLU}[k]$$

$$\text{index}[0] = 0$$

FORTRAN

$$\text{index}(i) = \sum_{k=1}^i \text{INLU}(k)$$

$$\text{index}(0) = 0$$

# MAT\_CON1: CRS format

```
!C
!C***  
!C*** MAT_CON1
!C***  
!C
subroutine MAT_CON1
use pfem_util
implicit REAL*8 (A-H, 0-Z)

allocate (index(0:N))
index= 0

do i= 1, N
    index(i)= index(i-1) + INLU(i)
enddo

NPLU= index(N)

allocate (item(NPLU))

do i= 1, N
    do k= 1, INLU(i)
        kk = k + index(i-1)
        item(kk)= IALU(i, k)
    enddo
enddo

deallocate (INLU, IALU)

end subroutine MAT_CON1
```

NPLU=index(N)  
Size of array: item  
Total number of non-zero off-diagonal blocks

# MAT\_CON1: CRS format

```
!C
!C***  
!C*** MAT_CON1
!C***  
!C
subroutine MAT_CON1
use pfem_util
implicit REAL*8 (A-H, 0-Z)

allocate (index(0:N))
index= 0

do i= 1, N
    index(i)= index(i-1) + INLU(i)
enddo

NPLU= index(N)

allocate (item(NPLU))

do i= 1, N
    do k= 1, INLU(i)
        kk = k + index(i-1)
        item(kk)=      IALU(i, k)
    enddo
enddo

deallocate (INLU, IALU)

end subroutine MAT_CON1
```

item

store node ID starting from 0

# MAT\_CON1: CRS format

```
!C
!C***  
!C*** MAT_CON1  
!C***  
!C
subroutine MAT_CON1
use pfem_util
implicit REAL*8 (A-H, 0-Z)

allocate (index(0:N))
index= 0

do i= 1, N
    index(i)= index(i-1) + INLU(i)
enddo

NPLU= index(N)

allocate (item(NPLU))

do i= 1, N
    do k= 1, INLU(i)
        kk = k + index(i-1)
        item(kk)=      IALU(i, k)
    enddo
enddo

deallocate (INLU, IALU)
end subroutine MAT_CON1
```

Not required any more

# Main Part

```
program heat3D

use solver11
use pfem_util

implicit REAL*8 (A-H, 0-Z)

call INPUT_CNTL
call INPUT_GRID

call MAT_CON0
call MAT_CON1

call MAT_ASS_MAIN
call MAT_ASS_BC

call SOLVE11

call OUTPUT_UCD

do i= 1, N
  if (XYZ(i, 1). eq. 0. d0. and. XYZ(i, 2). eq. 0. d0
&                                . and. XYZ(i, 3). eq. 0. d0) then
    write (*, '(i8, 1pe16. 6)' ) i, X(i)
  endif
enddo

end program heat3D
```

# MAT\_ASS\_MAIN: Overview

```

do kpn= 1, 2      Gaussian Quad. points in  $\zeta$ -direction
  do jpn= 1, 2    Gaussian Quad. points in  $\eta$ -direction
    do ipn= 1, 2   Gaussian Quad. Pointe in  $\xi$ -direction
      Define Shape Function at Gaussian Quad. Points (8-points)
      Its derivative on natural/local coordinate is also defined.
    enddo
  enddo
enddo

```


do icel= 1, ICELTOT Loop for Element  
 Jacobian and derivative on global coordinate of shape functions at  
 Gaussian Quad. Points are defined according to coordinates of 8 nodes. (JACOBI)

```

do ie= 1, 8           Local Node ID
do je= 1, 8           Local Node ID
Global Node ID: ip, jp
Address of Aip, jp in "item" : kk

do kpn= 1, 2          Gaussian Quad. points in  $\zeta$ -direction
  do jpn= 1, 2         Gaussian Quad. points in  $\eta$ -direction
    do ipn= 1, 2        Gaussian Quad. points in  $\xi$ -direction
      integration on each element
      coefficients of element matrices
      accumulation to global matrix
    enddo
  enddo
enddo
enddo
enddo

```

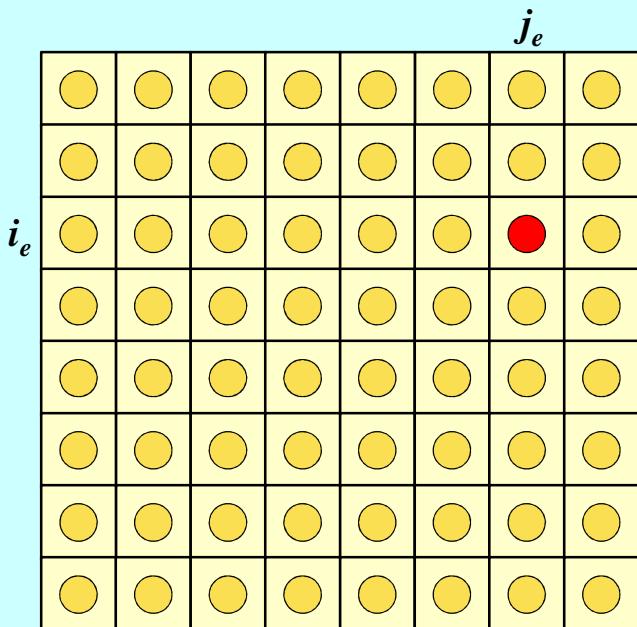

# MAT\_ASS\_MAIN (1/6)

```
!C
!C***
!C*** MAT_ASS_MAIN
!C***
!C
subroutine MAT_ASS_MAIN
use pfem_util
implicit REAL*8 (A-H,0-Z)
integer(kind=kint), dimension( 8) :: nodLOCAL

allocate (AMAT(NPLU))
allocate (B(N), D(N), X(N))

AMAT= 0. d0          Non-Zero Off-Diagonal components (coef. matrix)
B= 0. d0              RHS vector
X= 0. d0              Unknowns
D= 0. d0              Diagonal components (coef. matrix)

WEI (1)= +1. 0000000000D+00
WEI (2)= +1. 0000000000D+00

POS (1)= -0. 5773502692D+00
POS (2)= +0. 5773502692D+00
```

# MAT\_ASS\_MAIN (1/6)

```

!C
!C***
!C*** MAT_ASS_MAIN
!C***
!C
subroutine MAT_ASS_MAIN
use pfem_util
implicit REAL*8 (A-H,0-Z)
integer(kind=kint), dimension( 8) :: nodLOCAL

allocate (AMAT(NPLU))
allocate (B(N), D(N), X(N))


AMAT= 0. d0
B= 0. d0
X= 0. d0
D= 0. d0

WEI (1)= +1. 0000000000D+00
WEI (2)= +1. 0000000000D+00

POS (1)= -0. 5773502692D+00
POS (2)= +0. 5773502692D+00

```

*POS*: Quad. Point  
*WEI*: Weighting Factor

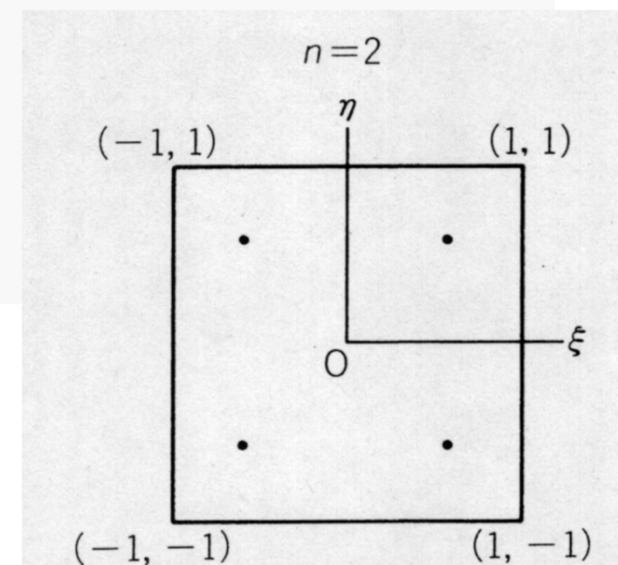

積分点  $a$  重み係数  $W$   
0.57735 02692 1.00000 00000

# MAT\_ASS\_MAIN (2/6)

```
!C
!C-- INIT.
!C      PNQ   - 1st-order derivative of shape function by QSI
!C      PNE   - 1st-order derivative of shape function by ETA
!C      PNT   - 1st-order derivative of shape function by ZET
!C
do kp= 1, 2
do jp= 1, 2
do ip= 1, 2
      QP1= 1. d0 + POS(ip)
      QM1= 1. d0 - POS(ip)
      EP1= 1. d0 + POS(jp)
      EM1= 1. d0 - POS(jp)
      TP1= 1. d0 + POS(kp)
      TM1= 1. d0 - POS(kp)
      SHAPE(ip, jp, kp, 1)= 08th * QM1 * EM1 * TM1
      SHAPE(ip, jp, kp, 2)= 08th * QP1 * EM1 * TM1
      SHAPE(ip, jp, kp, 3)= 08th * QP1 * EP1 * TM1
      SHAPE(ip, jp, kp, 4)= 08th * QM1 * EP1 * TM1
      SHAPE(ip, jp, kp, 5)= 08th * QM1 * EM1 * TP1
      SHAPE(ip, jp, kp, 6)= 08th * QP1 * EM1 * TP1
      SHAPE(ip, jp, kp, 7)= 08th * QP1 * EP1 * TP1
      SHAPE(ip, jp, kp, 8)= 08th * QM1 * EP1 * TP1
```

# MAT\_ASS\_MAIN (2/6)

```

!C
!C-- INIT.
!C   PNQ  - 1st-order derivative of shape function by QSI
!C   PNE  - 1st-order derivative of shape function by ETA
!C   PNT  - 1st-order derivative of shape function by ZET
!C

```

```

do kp= 1, 2
do jp= 1, 2
do ip= 1, 2

QP1= 1. d0 + POS(ip)
QM1= 1. d0 - POS(ip)
EP1= 1. d0 + POS(jp)
EM1= 1. d0 - POS(jp)
TP1= 1. d0 + POS(kp)
TM1= 1. d0 - POS(kp)

```

```

SHAPE(ip, jp, kp, 1)= 08th * QM1 * EM1 * TM1
SHAPE(ip, jp, kp, 2)= 08th * QP1 * EM1 * TM1
SHAPE(ip, jp, kp, 3)= 08th * QP1 * EP1 * TM1
SHAPE(ip, jp, kp, 4)= 08th * QM1 * EP1 * TM1
SHAPE(ip, jp, kp, 5)= 08th * QM1 * EM1 * TP1
SHAPE(ip, jp, kp, 6)= 08th * QP1 * EM1 * TP1
SHAPE(ip, jp, kp, 7)= 08th * QP1 * EP1 * TP1
SHAPE(ip, jp, kp, 8)= 08th * QM1 * EP1 * TP1

```

$$\begin{aligned}
QP1(i) &= (1 + \xi_i), & QM1(i) &= (1 - \xi_i) \\
EP1(j) &= (1 + \eta_j), & EM1(j) &= (1 - \eta_i) \\
TP1(k) &= (1 + \zeta_k), & TM1(k) &= (1 - \zeta_k)
\end{aligned}$$

# MAT\_ASS\_MAIN (2/6)

```

!C
!C-- INIT.
!C   PNQ - 1st-order derivative of shape function by QSI
!C   PNE - 1st-order derivative of shape function by ETA
!C   PNT - 1st-order derivative of shape function by ZET
!C

```


```

do kp= 1, 2
do jp= 1, 2
do ip= 1, 2

QP1= 1. d0 + POS(ip)
QM1= 1. d0 - POS(ip)
EP1= 1. d0 + POS(jp)
EM1= 1. d0 - POS(jp)
TP1= 1. d0 + POS(kp)
TM1= 1. d0 - POS(kp)

SHAPE(ip, jp, kp, 1)= 08th * QM1 * EM1 * TM1
SHAPE(ip, jp, kp, 2)= 08th * QP1 * EM1 * TM1
SHAPE(ip, jp, kp, 3)= 08th * QP1 * EP1 * TM1
SHAPE(ip, jp, kp, 4)= 08th * QM1 * EP1 * TM1
SHAPE(ip, jp, kp, 5)= 08th * QM1 * EM1 * TP1
SHAPE(ip, jp, kp, 6)= 08th * QP1 * EM1 * TP1
SHAPE(ip, jp, kp, 7)= 08th * QP1 * EP1 * TP1
SHAPE(ip, jp, kp, 8)= 08th * QM1 * EP1 * TP1

```

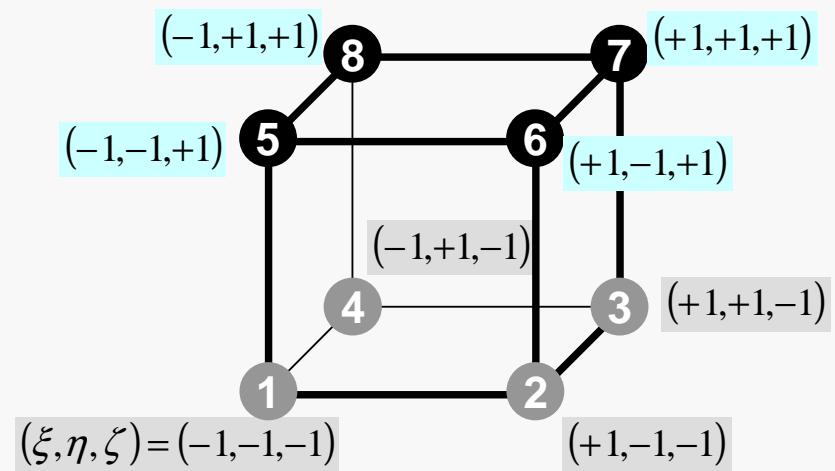

# MAT\_ASS\_MAIN (2/6)

```

!C
!C-- INIT.
!C   PNQ - 1st-order derivative of shape function by QSI
!C   PNE - 1st-order derivative of shape function by ETA
!C   PNT - 1st-order derivative of shape function by ZET

```

```

do kp= 1, 2
do jp= 1, 2
do ip= 1, 2

QP1= 1. d0 + POS(ip)
QM1= 1. d0 - POS(ip)
EP1= 1. d0 + POS(jp)
EM1= 1. d0 - POS(jp)
TP1= 1. d0 + POS(kp)
TM1= 1. d0 - POS(kp)

```

```

SHAPE(ip, jp, kp, 1)= 08th * QM1 * EM1 * TM1
SHAPE(ip, jp, kp, 2)= 08th * QP1 * EM1 * TM1
SHAPE(ip, jp, kp, 3)= 08th * QP1 * EP1 * TM1
SHAPE(ip, jp, kp, 4)= 08th * QM1 * EP1 * TM1
SHAPE(ip, jp, kp, 5)= 08th * QM1 * EM1 * TP1
SHAPE(ip, jp, kp, 6)= 08th * QP1 * EM1 * TP1
SHAPE(ip, jp, kp, 7)= 08th * QP1 * EP1 * TP1
SHAPE(ip, jp, kp, 8)= 08th * QM1 * EP1 * TP1

```

$$N_1(\xi, \eta, \zeta) = \frac{1}{8}(1-\xi)(1-\eta)(1-\zeta)$$

$$N_2(\xi, \eta, \zeta) = \frac{1}{8}(1+\xi)(1-\eta)(1-\zeta)$$

$$N_3(\xi, \eta, \zeta) = \frac{1}{8}(1+\xi)(1+\eta)(1-\zeta)$$

$$N_4(\xi, \eta, \zeta) = \frac{1}{8}(1-\xi)(1+\eta)(1-\zeta)$$

$$N_5(\xi, \eta, \zeta) = \frac{1}{8}(1-\xi)(1-\eta)(1+\zeta)$$

$$N_6(\xi, \eta, \zeta) = \frac{1}{8}(1+\xi)(1-\eta)(1+\zeta)$$

$$N_7(\xi, \eta, \zeta) = \frac{1}{8}(1+\xi)(1+\eta)(1+\zeta)$$

$$N_8(\xi, \eta, \zeta) = \frac{1}{8}(1-\xi)(1+\eta)(1+\zeta)$$

# MAT\_ASS\_MAIN (3/6)

```

PNQ(jp, kp, 1)= - 08th * EM1 * TM1
PNQ(jp, kp, 2)= + 08th * EM1 * TM1
PNQ(jp, kp, 3)= + 08th * EP1 * TM1
PNQ(jp, kp, 4)= - 08th * EP1 * TM1
PNQ(jp, kp, 5)= - 08th * EM1 * TP1
PNQ(jp, kp, 6)= + 08th * EM1 * TP1
PNQ(jp, kp, 7)= + 08th * EP1 * TP1
PNQ(jp, kp, 8)= - 08th * EP1 * TP1
PNE(ip, kp, 1)= - 08th * QM1 * TM1
PNE(ip, kp, 2)= - 08th * QP1 * TM1
PNE(ip, kp, 3)= + 08th * QP1 * TM1
PNE(ip, kp, 4)= + 08th * QM1 * TM1
PNE(ip, kp, 5)= - 08th * QM1 * TP1
PNE(ip, kp, 6)= - 08th * QP1 * TP1
PNE(ip, kp, 7)= + 08th * QP1 * TP1
PNE(ip, kp, 8)= + 08th * QM1 * TP1
PNT(ip, jp, 1)= - 08th * QM1 * EM1
PNT(ip, jp, 2)= - 08th * QP1 * EM1
PNT(ip, jp, 3)= - 08th * QP1 * EP1
PNT(ip, jp, 4)= - 08th * QM1 * EP1
PNT(ip, jp, 5)= + 08th * QM1 * EM1
PNT(ip, jp, 6)= + 08th * QP1 * EM1
PNT(ip, jp, 7)= + 08th * QP1 * EP1
PNT(ip, jp, 8)= + 08th * QM1 * EP1
enddo
enddo
enddo

do icel= 1, ICELTOT
  CONDO= COND

    in1= ICELNOD(icel, 1)
    in2= ICELNOD(icel, 2)
    in3= ICELNOD(icel, 3)
    in4= ICELNOD(icel, 4)
    in5= ICELNOD(icel, 5)
    in6= ICELNOD(icel, 6)
    in7= ICELNOD(icel, 7)
    in8= ICELNOD(icel, 8)
  
```

$$PNQ(j, k) = \frac{\partial N_l}{\partial \xi} (\xi = \xi_i, \eta = \eta_j, \zeta = \zeta_k)$$

$$PNE(i, k) = \frac{\partial N_l}{\partial \eta} (\xi = \xi_i, \eta = \eta_j, \zeta = \zeta_k)$$

$$PNT(i, j) = \frac{\partial N_l}{\partial \zeta} (\xi = \xi_i, \eta = \eta_j, \zeta = \zeta_k)$$

$$\frac{\partial N_1}{\partial \xi} (\xi_i, \eta_j, \zeta_k) = -\frac{1}{8} (1 - \eta_j)(1 - \zeta_k)$$

$$\frac{\partial N_2}{\partial \xi} (\xi_i, \eta_j, \zeta_k) = +\frac{1}{8} (1 - \eta_j)(1 - \zeta_k)$$

$$\frac{\partial N_3}{\partial \xi} (\xi_i, \eta_j, \zeta_k) = +\frac{1}{8} (1 + \eta_j)(1 - \zeta_k)$$

$$\frac{\partial N_4}{\partial \xi} (\xi_i, \eta_j, \zeta_k) = -\frac{1}{8} (1 + \eta_j)(1 - \zeta_k)$$


First Order Derivative  
of Shape Functions at  
 $(\xi_i, \eta_j, \zeta_k)$

# MAT\_ASS\_MAIN (3/6)

```

PNQ(jp, kp, 1)= - 08th * EM1 * TM1
PNQ(jp, kp, 2)= + 08th * EM1 * TM1
PNQ(jp, kp, 3)= + 08th * EP1 * TM1
PNQ(jp, kp, 4)= - 08th * EP1 * TM1
PNQ(jp, kp, 5)= - 08th * EM1 * TP1
PNQ(jp, kp, 6)= + 08th * EM1 * TP1
PNQ(jp, kp, 7)= + 08th * EP1 * TP1
PNQ(jp, kp, 8)= - 08th * EP1 * TP1
PNE(ip, kp, 1)= - 08th * QM1 * TM1
PNE(ip, kp, 2)= - 08th * QP1 * TM1
PNE(ip, kp, 3)= + 08th * QP1 * TM1
PNE(ip, kp, 4)= + 08th * QM1 * TM1
PNE(ip, kp, 5)= - 08th * QM1 * TP1
PNE(ip, kp, 6)= - 08th * QP1 * TP1
PNE(ip, kp, 7)= + 08th * QP1 * TP1
PNE(ip, kp, 8)= + 08th * QM1 * TP1
PNT(ip, jp, 1)= - 08th * QM1 * EM1
PNT(ip, jp, 2)= - 08th * QP1 * EM1
PNT(ip, jp, 3)= - 08th * QP1 * EP1
PNT(ip, jp, 4)= - 08th * QM1 * EP1
PNT(ip, jp, 5)= + 08th * QM1 * EM1
PNT(ip, jp, 6)= + 08th * QP1 * EM1
PNT(ip, jp, 7)= + 08th * QP1 * EP1
PNT(ip, jp, 8)= + 08th * QM1 * EP1
enddo
enddo
enddo
do icel= 1, ICELTOT
  CONDO= COND
  in1= ICELNOD(icel, 1)
  in2= ICELNOD(icel, 2)
  in3= ICELNOD(icel, 3)
  in4= ICELNOD(icel, 4)
  in5= ICELNOD(icel, 5)
  in6= ICELNOD(icel, 6)
  in7= ICELNOD(icel, 7)
  in8= ICELNOD(icel, 8)

```

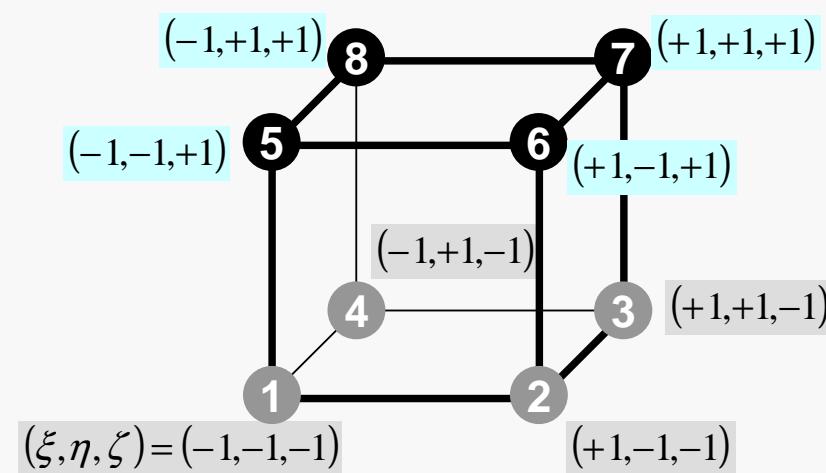

# MAT\_ASS\_MAIN (4/6)

```

nodLOCAL(1)= in1
nodLOCAL(2)= in2
nodLOCAL(3)= in3
nodLOCAL(4)= in4
nodLOCAL(5)= in5
nodLOCAL(6)= in6
nodLOCAL(7)= in7
nodLOCAL(8)= in8

```

Node ID (Global)

```

X1= XYZ(in1, 1)
X2= XYZ(in2, 1)
X3= XYZ(in3, 1)
X4= XYZ(in4, 1)
X5= XYZ(in5, 1)
X6= XYZ(in6, 1)
X7= XYZ(in7, 1)
X8= XYZ(in8, 1)
Y1= XYZ(in1, 2)
Y2= XYZ(in2, 2)
Y3= XYZ(in3, 2)
Y4= XYZ(in4, 2)
Y5= XYZ(in5, 2)
Y6= XYZ(in6, 2)
Y7= XYZ(in7, 2)
Y8= XYZ(in8, 2)
QVC= 08th * (X1+X2+X3+X4+X5+X6+X7+X8+
               Y1+Y2+Y3+Y4+Y5+Y6+Y7+Y8)

```

&amp;

```

Z1= XYZ(in1, 3)
Z2= XYZ(in2, 3)
Z3= XYZ(in3, 3)
Z4= XYZ(in4, 3)
Z5= XYZ(in5, 3)
Z6= XYZ(in6, 3)
Z7= XYZ(in7, 3)
Z8= XYZ(in8, 3)


```

&amp;&amp;

```

call JACOBI (DETJ, PNQ, PNE, PNT, PNX, PNY, PNZ,
              X1, X2, X3, X4, X5, X6, X7, X8,
              Y1, Y2, Y3, Y4, Y5, Y6, Y7, Y8,
              Z1, Z2, Z3, Z4, Z5, Z6, Z7, Z8 )

```

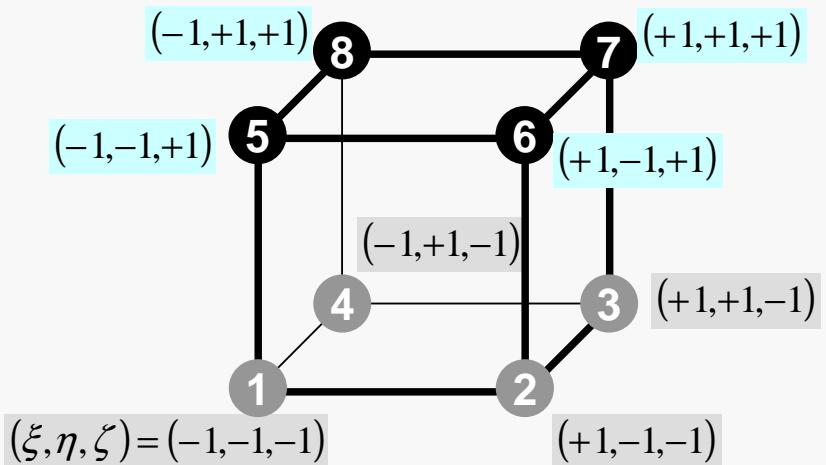

$$(\xi, \eta, \zeta) = (-1, -1, -1)$$

$$(-1, +1, +1)$$

$$(-1, -1, +1)$$

$$(-1, +1, -1)$$

$$(1, +1, -1)$$

$$(+1, -1, -1)$$

$$(+1, -1, +1)$$

# MAT\_ASS\_MAIN (4/6)

```
nodLOCAL(1)= in1
nodLOCAL(2)= in2
nodLOCAL(3)= in3
nodLOCAL(4)= in4
nodLOCAL(5)= in5
nodLOCAL(6)= in6
nodLOCAL(7)= in7
nodLOCAL(8)= in8
```

```
X1= XYZ(in1, 1)
X2= XYZ(in2, 1)
X3= XYZ(in3, 1)
X4= XYZ(in4, 1)
X5= XYZ(in5, 1)
X6= XYZ(in6, 1)
X7= XYZ(in7, 1)
X8= XYZ(in8, 1)
Y1= XYZ(in1, 2)
Y2= XYZ(in2, 2)
Y3= XYZ(in3, 2)
Y4= XYZ(in4, 2)
Y5= XYZ(in5, 2)
Y6= XYZ(in6, 2)
Y7= XYZ(in7, 2)
Y8= XYZ(in8, 2)
```

& QVC= 08th \* (X1+X2+X3+X4+X5+X6+X7+X8+
 $Y_1+Y_2+Y_3+Y_4+Y_5+Y_6+Y_7+Y_8)$


```
Z1= XYZ(in1, 3)
Z2= XYZ(in2, 3)
Z3= XYZ(in3, 3)
Z4= XYZ(in4, 3)
Z5= XYZ(in5, 3)
Z6= XYZ(in6, 3)
Z7= XYZ(in7, 3)
Z8= XYZ(in8, 3)
```

```
call JACOBI (DETJ, PNQ, PNE, PNT, PNX, PNY, PNZ,
& X1, X2, X3, X4, X5, X6, X7, X8,
& Y1, Y2, Y3, Y4, Y5, Y6, Y7, Y8,
& Z1, Z2, Z3, Z4, Z5, Z6, Z7, Z8 )
```

X-Coordinates  
of 8 nodes

Y-Coordinates  
of 8 nodes

Z-Coordinates  
of 8 nodes

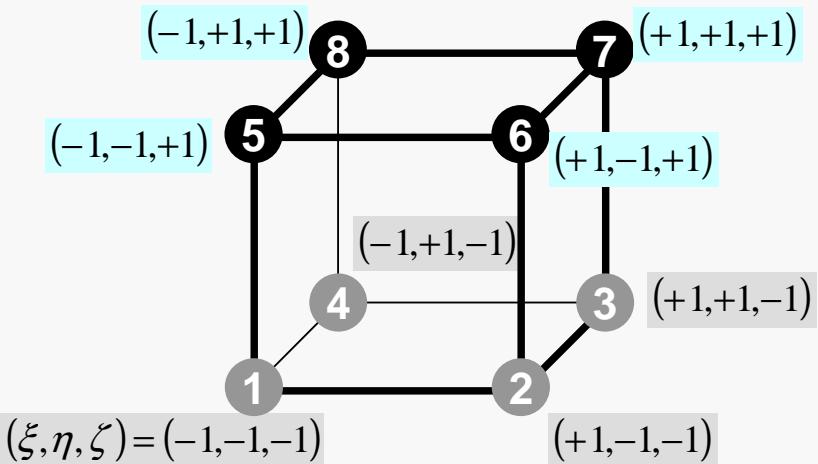

# MAT\_ASS\_MAIN (4/6)

```
nodLOCAL(1)= in1
nodLOCAL(2)= in2
nodLOCAL(3)= in3
nodLOCAL(4)= in4
nodLOCAL(5)= in5
nodLOCAL(6)= in6
nodLOCAL(7)= in7
nodLOCAL(8)= in8
```

```
X1= XYZ(in1, 1)
X2= XYZ(in2, 1)
X3= XYZ(in3, 1)
X4= XYZ(in4, 1)
X5= XYZ(in5, 1)
X6= XYZ(in6, 1)
X7= XYZ(in7, 1)
X8= XYZ(in8, 1)
Y1= XYZ(in1, 2)
Y2= XYZ(in2, 2)
Y3= XYZ(in3, 2)
Y4= XYZ(in4, 2)
Y5= XYZ(in5, 2)
Y6= XYZ(in6, 2)
Y7= XYZ(in7, 2)
Y8= XYZ(in8, 2)
```


& QVC= 08th \* (X1+X2+X3+X4+X5+X6+X7+X8+
 $Y_1+Y_2+Y_3+Y_4+Y_5+Y_6+Y_7+Y_8)$

```
Z1= XYZ(in1, 3)
Z2= XYZ(in2, 3)
Z3= XYZ(in3, 3)
Z4= XYZ(in4, 3)
Z5= XYZ(in5, 3)
Z6= XYZ(in6, 3)
Z7= XYZ(in7, 3)
Z8= XYZ(in8, 3)
```

```
& call JACOBI (DETJ, PNQ, PNE, PNT, PNX, PNY, PNZ,
& X1, X2, X3, X4, X5, X6, X7, X8,
& Y1, Y2, Y3, Y4, Y5, Y6, Y7, Y8,
& Z1, Z2, Z3, Z4, Z5, Z6, Z7, Z8 )
```

X-Coordinates  
of 8 nodes

Y-Coordinates  
of 8 nodes

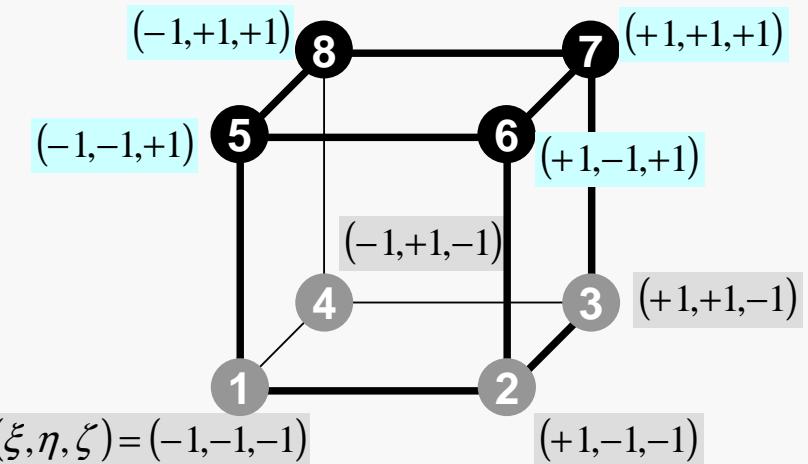

$$\frac{\partial}{\partial x} \left( \lambda \frac{\partial T}{\partial x} \right) + \frac{\partial}{\partial y} \left( \lambda \frac{\partial T}{\partial y} \right) + \frac{\partial}{\partial z} \left( \lambda \frac{\partial T}{\partial z} \right) + \dot{Q}(x, y, z) = 0$$

$$\dot{Q}(x, y, z) = QVOL |x_c + y_c|$$

Heat Gen. Rate is a function of location  
(cell center:  $x_c, y_c$ )

&  
&  
&

# MAT\_ASS\_MAIN (4/6)

```
nodLOCAL(1)= in1
nodLOCAL(2)= in2
nodLOCAL(3)= in3
nodLOCAL(4)= in4
nodLOCAL(5)= in5
nodLOCAL(6)= in6
nodLOCAL(7)= in7
nodLOCAL(8)= in8
```

```
X1= XYZ(in1, 1)
X2= XYZ(in2, 1)
X3= XYZ(in3, 1)
X4= XYZ(in4, 1)
X5= XYZ(in5, 1)
X6= XYZ(in6, 1)
X7= XYZ(in7, 1)
X8= XYZ(in8, 1)
```

```
Y1= XYZ(in1, 2)
Y2= XYZ(in2, 2)
Y3= XYZ(in3, 2)
Y4= XYZ(in4, 2)
Y5= XYZ(in5, 2)
Y6= XYZ(in6, 2)
Y7= XYZ(in7, 2)
Y8= XYZ(in8, 2)
```


**QVC= 08th \* (X1+X2+X3+X4+X5+X6+X7+X8+  
Y1+Y2+Y3+Y4+Y5+Y6+Y7+Y8)**

```
Z1= XYZ(in1, 3)
Z2= XYZ(in2, 3)
Z3= XYZ(in3, 3)
Z4= XYZ(in4, 3)
Z5= XYZ(in5, 3)
Z6= XYZ(in6, 3)
Z7= XYZ(in7, 3)
Z8= XYZ(in8, 3)
```

&amp;

&amp;&amp;

```
call JACOBI (DETJ, PNQ, PNE, PNT, PNX, PNY, PNZ,
             X1, X2, X3, X4, X5, X6, X7, X8,
             Y1, Y2, Y3, Y4, Y5, Y6, Y7, Y8,
             Z1, Z2, Z3, Z4, Z5, Z6, Z7, Z8 )
```

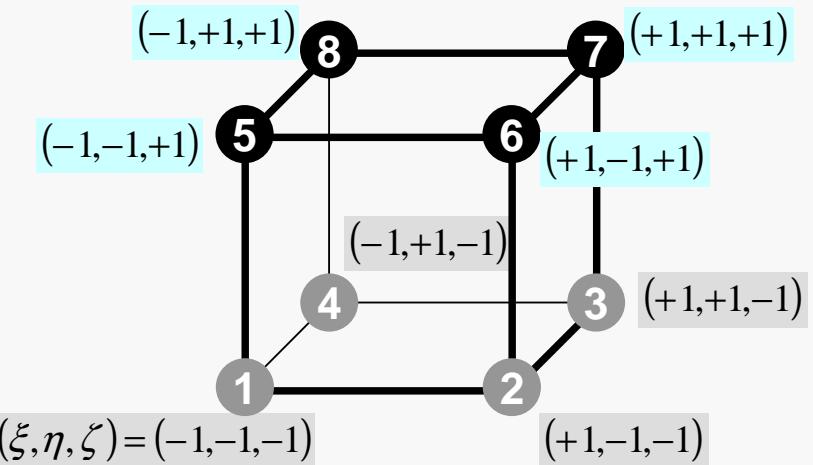

$$\frac{\partial}{\partial x} \left( \lambda \frac{\partial T}{\partial x} \right) + \frac{\partial}{\partial y} \left( \lambda \frac{\partial T}{\partial y} \right) + \frac{\partial}{\partial z} \left( \lambda \frac{\partial T}{\partial z} \right) + \dot{Q}(x, y, z) = 0$$

$$\dot{Q}(x, y, z) = QVOL |x_c + y_c|$$

$$QVC = |x_c + y_c|$$

&amp;

&amp;

# MAT\_ASS\_MAIN (4/6)

```

nodLOCAL(1)= in1
nodLOCAL(2)= in2
nodLOCAL(3)= in3
nodLOCAL(4)= in4
nodLOCAL(5)= in5
nodLOCAL(6)= in6
nodLOCAL(7)= in7
nodLOCAL(8)= in8

X1= XYZ(in1, 1)
X2= XYZ(in2, 1)
X3= XYZ(in3, 1)
X4= XYZ(in4, 1)
X5= XYZ(in5, 1)
X6= XYZ(in6, 1)
X7= XYZ(in7, 1)
X8= XYZ(in8, 1)
Y1= XYZ(in1, 2)
Y2= XYZ(in2, 2)
Y3= XYZ(in3, 2)
Y4= XYZ(in4, 2)
Y5= XYZ(in5, 2)
Y6= XYZ(in6, 2)
Y7= XYZ(in7, 2)
Y8= XYZ(in8, 2)
& QVC= 08th * (X1+X2+X3+X4+X5+X6+X7+X8+
    Y1+Y2+Y3+Y4+Y5+Y6+Y7+Y8)
Z1= XYZ(in1, 3)
Z2= XYZ(in2, 3)
Z3= XYZ(in3, 3)
Z4= XYZ(in4, 3)
Z5= XYZ(in5, 3)
Z6= XYZ(in6, 3)
Z7= XYZ(in7, 3)
Z8= XYZ(in8, 3)

& call JACOBI (DETJ, PNQ, PNE, PNT, PNX, PNY, PNZ,
    & X1, X2, X3, X4, X5, X6, X7, X8,
    & Y1, Y2, Y3, Y4, Y5, Y6, Y7, Y8,
    & Z1, Z2, Z3, Z4, Z5, Z6, Z7, Z8 )
    &
    &
    &
```

# JACOBI (1/4)

```
subroutine JACOBI (DETJ, PNQ, PNE, PNT, PNX, PNY, PNZ,
& X1, X2, X3, X4, X5, X6, X7, X8, Y1, Y2, Y3, Y4, Y5, Y6, Y7, Y8, &
& Z1, Z2, Z3, Z4, Z5, Z6, Z7, Z8 )
```

!C  
!C calculates JACOBIAN & INVERSE JACOBIAN  
!C      dNi/dx, dNi/dy & dNi/dz  
!C

```
implicit REAL*8 (A-H, O-Z)
dimension DETJ(2, 2, 2)
dimension PNQ(2, 2, 8), PNE(2, 2, 8), PNT(2, 2, 8)
dimension PNX(2, 2, 2, 8), PNY(2, 2, 2, 8), PNZ(2, 2, 2, 8)

do kp= 1, 2
do jp= 1, 2
do ip= 1, 2
  PNX(ip, jp, kp, 1)=0. d0
  PNX(ip, jp, kp, 2)=0. d0
  PNX(ip, jp, kp, 3)=0. d0
  PNX(ip, jp, kp, 4)=0. d0
  PNX(ip, jp, kp, 5)=0. d0
  PNX(ip, jp, kp, 6)=0. d0
  PNX(ip, jp, kp, 7)=0. d0
  PNX(ip, jp, kp, 8)=0. d0
  PNY(ip, jp, kp, 1)=0. d0
  PNY(ip, jp, kp, 2)=0. d0
  PNY(ip, jp, kp, 3)=0. d0
  PNY(ip, jp, kp, 4)=0. d0
  PNY(ip, jp, kp, 5)=0. d0
  PNY(ip, jp, kp, 6)=0. d0
  PNY(ip, jp, kp, 7)=0. d0
  PNY(ip, jp, kp, 8)=0. d0
  PNZ(ip, jp, kp, 1)=0. d0
  PNZ(ip, jp, kp, 2)=0. d0
  PNZ(ip, jp, kp, 3)=0. d0
  PNZ(ip, jp, kp, 4)=0. d0
  PNZ(ip, jp, kp, 5)=0. d0
  PNZ(ip, jp, kp, 6)=0. d0
  PNZ(ip, jp, kp, 7)=0. d0
  PNZ(ip, jp, kp, 8)=0. d0
```

**Input**

$$\left[ \frac{\partial N_l}{\partial \xi}, \frac{\partial N_l}{\partial \eta}, \frac{\partial N_l}{\partial \zeta} \right], (x_l, y_l, z_l) (l = 1 \sim 8)$$

**Output**

$$\left[ \frac{\partial N_l}{\partial x}, \frac{\partial N_l}{\partial y}, \frac{\partial N_l}{\partial z} \right], \det|J|$$

**Values at each Gaussian Quad.  
Points: (ip,jp,kp)**

# Partial Diff. on Natural Coord. (1/4)

- According to formulae:

$$\frac{\partial N_i(\xi, \eta, \zeta)}{\partial \xi} = \frac{\partial N_i}{\partial x} \frac{\partial x}{\partial \xi} + \frac{\partial N_i}{\partial y} \frac{\partial y}{\partial \xi} + \frac{\partial N_i}{\partial z} \frac{\partial z}{\partial \xi}$$

$$\frac{\partial N_i(\xi, \eta, \zeta)}{\partial \eta} = \frac{\partial N_i}{\partial x} \frac{\partial x}{\partial \eta} + \frac{\partial N_i}{\partial y} \frac{\partial y}{\partial \eta} + \frac{\partial N_i}{\partial z} \frac{\partial z}{\partial \eta}$$

$$\frac{\partial N_i(\xi, \eta, \zeta)}{\partial \zeta} = \frac{\partial N_i}{\partial x} \frac{\partial x}{\partial \zeta} + \frac{\partial N_i}{\partial y} \frac{\partial y}{\partial \zeta} + \frac{\partial N_i}{\partial z} \frac{\partial z}{\partial \zeta}$$

$\left[ \frac{\partial N_i}{\partial \xi}, \frac{\partial N_i}{\partial \eta}, \frac{\partial N_i}{\partial \zeta} \right]$  can be easily derived according to definitions.

$\left[ \frac{\partial N_i}{\partial x}, \frac{\partial N_i}{\partial y}, \frac{\partial N_i}{\partial z} \right]$  are required for computations.

# Partial Diff. on Natural Coord. (2/4)

- In matrix form:

$$\begin{Bmatrix} \frac{\partial N_i}{\partial \xi} \\ \frac{\partial N_i}{\partial \eta} \\ \frac{\partial N_i}{\partial \zeta} \end{Bmatrix} = \begin{bmatrix} \frac{\partial x}{\partial \xi} & \frac{\partial y}{\partial \xi} & \frac{\partial z}{\partial \xi} \\ \frac{\partial x}{\partial \eta} & \frac{\partial y}{\partial \eta} & \frac{\partial z}{\partial \eta} \\ \frac{\partial x}{\partial \zeta} & \frac{\partial y}{\partial \zeta} & \frac{\partial z}{\partial \zeta} \end{bmatrix} \begin{Bmatrix} \frac{\partial N_i}{\partial x} \\ \frac{\partial N_i}{\partial y} \\ \frac{\partial N_i}{\partial z} \end{Bmatrix} = [J] \begin{Bmatrix} \frac{\partial N_i}{\partial x} \\ \frac{\partial N_i}{\partial y} \\ \frac{\partial N_i}{\partial z} \end{Bmatrix}$$

$$[J] = \begin{bmatrix} J_{11} & J_{12} & J_{13} \\ J_{21} & J_{22} & J_{23} \\ J_{31} & J_{32} & J_{33} \end{bmatrix} \quad [J] : \text{Jacobi matrix, Jacobian}$$

# Partial Diff. on Natural Coord. (3/4)

- Components of Jacobian:

$$J_{11} = \frac{\partial x}{\partial \xi} = \frac{\partial}{\partial \xi} \left( \sum_{i=1}^8 N_i x_i \right) = \sum_{i=1}^8 \frac{\partial N_i}{\partial \xi} x_i, \quad J_{12} = \frac{\partial y}{\partial \xi} = \frac{\partial}{\partial \xi} \left( \sum_{i=1}^8 N_i y_i \right) = \sum_{i=1}^8 \frac{\partial N_i}{\partial \xi} y_i,$$

$$J_{13} = \frac{\partial z}{\partial \xi} = \frac{\partial}{\partial \xi} \left( \sum_{i=1}^8 N_i z_i \right) = \sum_{i=1}^8 \frac{\partial N_i}{\partial \xi} z_i$$

$$J_{21} = \frac{\partial x}{\partial \eta} = \frac{\partial}{\partial \eta} \left( \sum_{i=1}^8 N_i x_i \right) = \sum_{i=1}^8 \frac{\partial N_i}{\partial \eta} x_i, \quad J_{22} = \frac{\partial y}{\partial \eta} = \frac{\partial}{\partial \eta} \left( \sum_{i=1}^8 N_i y_i \right) = \sum_{i=1}^8 \frac{\partial N_i}{\partial \eta} y_i,$$

$$J_{23} = \frac{\partial z}{\partial \eta} = \frac{\partial}{\partial \eta} \left( \sum_{i=1}^8 N_i z_i \right) = \sum_{i=1}^8 \frac{\partial N_i}{\partial \eta} z_i$$

$$J_{31} = \frac{\partial x}{\partial \zeta} = \frac{\partial}{\partial \zeta} \left( \sum_{i=1}^8 N_i x_i \right) = \sum_{i=1}^8 \frac{\partial N_i}{\partial \zeta} x_i, \quad J_{32} = \frac{\partial y}{\partial \zeta} = \frac{\partial}{\partial \zeta} \left( \sum_{i=1}^8 N_i y_i \right) = \sum_{i=1}^8 \frac{\partial N_i}{\partial \zeta} y_i,$$

$$J_{33} = \frac{\partial z}{\partial \zeta} = \frac{\partial}{\partial \zeta} \left( \sum_{i=1}^8 N_i z_i \right) = \sum_{i=1}^8 \frac{\partial N_i}{\partial \zeta} z_i$$

# JACOBI (2/4)

!C  
!C== DETERMINANT of the JACOBIAN

```

dXdQ =
+ PNQ(jp, kp, 1) * X1 + PNQ(jp, kp, 2) * X2
+ PNQ(jp, kp, 3) * X3 + PNQ(jp, kp, 4) * X4
+ PNQ(jp, kp, 5) * X5 + PNQ(jp, kp, 6) * X6
+ PNQ(jp, kp, 7) * X7 + PNQ(jp, kp, 8) * X8

dYdQ =
+ PNQ(jp, kp, 1) * Y1 + PNQ(jp, kp, 2) * Y2
+ PNQ(jp, kp, 3) * Y3 + PNQ(jp, kp, 4) * Y4
+ PNQ(jp, kp, 5) * Y5 + PNQ(jp, kp, 6) * Y6
+ PNQ(jp, kp, 7) * Y7 + PNQ(jp, kp, 8) * Y8

dZdQ =
+ PNQ(jp, kp, 1) * Z1 + PNQ(jp, kp, 2) * Z2
+ PNQ(jp, kp, 3) * Z3 + PNQ(jp, kp, 4) * Z4
+ PNQ(jp, kp, 5) * Z5 + PNQ(jp, kp, 6) * Z6
+ PNQ(jp, kp, 7) * Z7 + PNQ(jp, kp, 8) * Z8

dXdE =
+ PNE(ip, kp, 1) * X1 + PNE(ip, kp, 2) * X2
+ PNE(ip, kp, 3) * X3 + PNE(ip, kp, 4) * X4
+ PNE(ip, kp, 5) * X5 + PNE(ip, kp, 6) * X6
+ PNE(ip, kp, 7) * X7 + PNE(ip, kp, 8) * X8

dYdE =
+ PNE(ip, kp, 1) * Y1 + PNE(ip, kp, 2) * Y2
+ PNE(ip, kp, 3) * Y3 + PNE(ip, kp, 4) * Y4
+ PNE(ip, kp, 5) * Y5 + PNE(ip, kp, 6) * Y6
+ PNE(ip, kp, 7) * Y7 + PNE(ip, kp, 8) * Y8

dZdE =
+ PNE(ip, kp, 1) * Z1 + PNE(ip, kp, 2) * Z2
+ PNE(ip, kp, 3) * Z3 + PNE(ip, kp, 4) * Z4
+ PNE(ip, kp, 5) * Z5 + PNE(ip, kp, 6) * Z6
+ PNE(ip, kp, 7) * Z7 + PNE(ip, kp, 8) * Z8

```

$$[J] = \begin{bmatrix} J_{11} & J_{12} & J_{13} \\ J_{21} & J_{22} & J_{23} \\ J_{31} & J_{32} & J_{33} \end{bmatrix}$$

$$dXdQ = \frac{\partial x}{\partial \xi} = J_{11}$$

$$dYdQ = \frac{\partial y}{\partial \xi} = J_{12}$$

$$dZdQ = \frac{\partial z}{\partial \xi} = J_{13}$$

# JACOBI (3/4)

```

& dXdT =
&   + PNT(ip, jp, 1) * X1 + PNT(ip, jp, 2) * X2
&   + PNT(ip, jp, 3) * X3 + PNT(ip, jp, 4) * X4
&   + PNT(ip, jp, 5) * X5 + PNT(ip, jp, 6) * X6
&   + PNT(ip, jp, 7) * X7 + PNT(ip, jp, 8) * X8
&
& dYdT =
&   + PNT(ip, jp, 1) * Y1 + PNT(ip, jp, 2) * Y2
&   + PNT(ip, jp, 3) * Y3 + PNT(ip, jp, 4) * Y4
&   + PNT(ip, jp, 5) * Y5 + PNT(ip, jp, 6) * Y6
&   + PNT(ip, jp, 7) * Y7 + PNT(ip, jp, 8) * Y8
&
& dZdT =
&   + PNT(ip, jp, 1) * Z1 + PNT(ip, jp, 2) * Z2
&   + PNT(ip, jp, 3) * Z3 + PNT(ip, jp, 4) * Z4
&   + PNT(ip, jp, 5) * Z5 + PNT(ip, jp, 6) * Z6
&   + PNT(ip, jp, 7) * Z7 + PNT(ip, jp, 8) * Z8
&
& DETJ(ip, jp, kp)= dXdQ*(dYdT*dZdT-dZdT*dYdT) +
&                   dYdQ*(dZdT*dXdT-dXdT*dZdT) +
&                   dZdQ*(dXdT*dYdT-dYdT*dXdT)
&
```

```

!C
!C== INVERSE JACOBIAN
coef= 1. d0 / DETJ(ip, jp, kp)

a11= coef * ( dYdT*dZdT - dZdT*dYdT )
a12= coef * ( dZdT*dYdT - dYdT*dZdT )
a13= coef * ( dYdT*dZdT - dZdT*dYdT )

a21= coef * ( dZdT*dXdT - dXdT*dZdT )
a22= coef * ( dXdT*dZdT - dZdT*dXdT )
a23= coef * ( dZdT*dXdT - dXdT*dZdT )

a31= coef * ( dXdT*dYdT - dYdT*dXdT )
a32= coef * ( dYdT*dXdT - dXdT*dYdT )
a33= coef * ( dXdT*dYdT - dYdT*dXdT )

DETJ(ip, jp, kp)= dabs(DETJ(ip, jp, kp))

```

$$[J] = \begin{bmatrix} J_{11} & J_{12} & J_{13} \\ J_{21} & J_{22} & J_{23} \\ J_{31} & J_{32} & J_{33} \end{bmatrix}$$

# Partial Diff. on Natural Coord. (4/4)

- Partial differentiation on global coordinate system is introduced as follows (with inverse of Jacobian matrix ( $3 \times 3$ ))

$$\begin{Bmatrix} \frac{\partial N_i}{\partial x} \\ \frac{\partial N_i}{\partial y} \\ \frac{\partial N_i}{\partial z} \end{Bmatrix} = \begin{bmatrix} \frac{\partial x}{\partial \xi} & \frac{\partial y}{\partial \xi} & \frac{\partial z}{\partial \xi} \\ \frac{\partial x}{\partial \eta} & \frac{\partial y}{\partial \eta} & \frac{\partial z}{\partial \eta} \\ \frac{\partial x}{\partial \zeta} & \frac{\partial y}{\partial \zeta} & \frac{\partial z}{\partial \zeta} \end{bmatrix}^{-1} \begin{Bmatrix} \frac{\partial N_i}{\partial \xi} \\ \frac{\partial N_i}{\partial \eta} \\ \frac{\partial N_i}{\partial \zeta} \end{Bmatrix} = [J]^{-1} \begin{Bmatrix} \frac{\partial N_i}{\partial \xi} \\ \frac{\partial N_i}{\partial \eta} \\ \frac{\partial N_i}{\partial \zeta} \end{Bmatrix}$$

# JACOBI (3/4)

```

& dXdT =
&   + PNT(ip, jp, 1) * X1 + PNT(ip, jp, 2) * X2
&   + PNT(ip, jp, 3) * X3 + PNT(ip, jp, 4) * X4
&   + PNT(ip, jp, 5) * X5 + PNT(ip, jp, 6) * X6
&   + PNT(ip, jp, 7) * X7 + PNT(ip, jp, 8) * X8
&
& dYdT =
&   + PNT(ip, jp, 1) * Y1 + PNT(ip, jp, 2) * Y2
&   + PNT(ip, jp, 3) * Y3 + PNT(ip, jp, 4) * Y4
&   + PNT(ip, jp, 5) * Y5 + PNT(ip, jp, 6) * Y6
&   + PNT(ip, jp, 7) * Y7 + PNT(ip, jp, 8) * Y8
&
& dZdT =
&   + PNT(ip, jp, 1) * Z1 + PNT(ip, jp, 2) * Z2
&   + PNT(ip, jp, 3) * Z3 + PNT(ip, jp, 4) * Z4
&   + PNT(ip, jp, 5) * Z5 + PNT(ip, jp, 6) * Z6
&   + PNT(ip, jp, 7) * Z7 + PNT(ip, jp, 8) * Z8
&
& DETJ(ip, jp, kp)= dXdQ*(dYdT*dZdT-dZdT*dYdT) +
&                   dYdQ*(dZdT*dXdT-dXdT*dZdT) +
&                   dZdQ*(dXdT*dYdT-dYdT*dXdT)

```

**!C**  
**!C== INVERSE JACOBIAN**  
 $\text{coef} = 1. \text{d}0 / \text{DETJ(ip, jp, kp)}$

```

a11= coef * ( dYdT*dZdT - dZdT*dYdT )
a12= coef * ( dZdT*dYdT - dYdT*dZdT )
a13= coef * ( dYdT*dZdT - dZdT*dYdT )

a21= coef * ( dZdT*dXdT - dXdT*dZdT )
a22= coef * ( dXdT*dZdT - dZdT*dXdT )
a23= coef * ( dZdT*dXdT - dXdT*dZdT )

a31= coef * ( dXdT*dYdT - dYdT*dXdT )
a32= coef * ( dYdT*dXdT - dXdT*dYdT )
a33= coef * ( dXdT*dYdT - dYdT*dXdT )

```

$\text{DETJ(ip, jp, kp)} = \text{dabs}(\text{DETJ(ip, jp, kp)})$

$$[J]^{-1} = \begin{bmatrix} a_{11} & a_{12} & a_{13} \\ a_{21} & a_{22} & a_{23} \\ a_{31} & a_{32} & a_{33} \end{bmatrix}$$

# JACOBI (4/4)

!C

!C== set the dNi/dX, dNi/dY &amp; dNi/dZ components

$$\begin{aligned} PNX(ip, jp, kp, 1) &= a11*PNQ(jp, kp, 1) + a12*PNE(ip, kp, 1) + a13*PNT(ip, jp, 1) \\ PNX(ip, jp, kp, 2) &= a11*PNQ(jp, kp, 2) + a12*PNE(ip, kp, 2) + a13*PNT(ip, jp, 2) \\ PNX(ip, jp, kp, 3) &= a11*PNQ(jp, kp, 3) + a12*PNE(ip, kp, 3) + a13*PNT(ip, jp, 3) \\ PNX(ip, jp, kp, 4) &= a11*PNQ(jp, kp, 4) + a12*PNE(ip, kp, 4) + a13*PNT(ip, jp, 4) \\ PNX(ip, jp, kp, 5) &= a11*PNQ(jp, kp, 5) + a12*PNE(ip, kp, 5) + a13*PNT(ip, jp, 5) \\ PNX(ip, jp, kp, 6) &= a11*PNQ(jp, kp, 6) + a12*PNE(ip, kp, 6) + a13*PNT(ip, jp, 6) \\ PNX(ip, jp, kp, 7) &= a11*PNQ(jp, kp, 7) + a12*PNE(ip, kp, 7) + a13*PNT(ip, jp, 7) \\ PNX(ip, jp, kp, 8) &= a11*PNQ(jp, kp, 8) + a12*PNE(ip, kp, 8) + a13*PNT(ip, jp, 8) \end{aligned}$$

$$\begin{aligned} PNY(ip, jp, kp, 1) &= a21*PNQ(jp, kp, 1) + a22*PNE(ip, kp, 1) + a23*PNT(ip, jp, 1) \\ PNY(ip, jp, kp, 2) &= a21*PNQ(jp, kp, 2) + a22*PNE(ip, kp, 2) + a23*PNT(ip, jp, 2) \\ PNY(ip, jp, kp, 3) &= a21*PNQ(jp, kp, 3) + a22*PNE(ip, kp, 3) + a23*PNT(ip, jp, 3) \\ PNY(ip, jp, kp, 4) &= a21*PNQ(jp, kp, 4) + a22*PNE(ip, kp, 4) + a23*PNT(ip, jp, 4) \\ PNY(ip, jp, kp, 5) &= a21*PNQ(jp, kp, 5) + a22*PNE(ip, kp, 5) + a23*PNT(ip, jp, 5) \\ PNY(ip, jp, kp, 6) &= a21*PNQ(jp, kp, 6) + a22*PNE(ip, kp, 6) + a23*PNT(ip, jp, 6) \\ PNY(ip, jp, kp, 7) &= a21*PNQ(jp, kp, 7) + a22*PNE(ip, kp, 7) + a23*PNT(ip, jp, 7) \\ PNY(ip, jp, kp, 8) &= a21*PNQ(jp, kp, 8) + a22*PNE(ip, kp, 8) + a23*PNT(ip, jp, 8) \end{aligned}$$

$$\begin{aligned} PNZ(ip, jp, kp, 1) &= a31*PNQ(jp, kp, 1) + a32*PNE(ip, kp, 1) + a33*PNT(ip, jp, 1) \\ PNZ(ip, jp, kp, 2) &= a31*PNQ(jp, kp, 2) + a32*PNE(ip, kp, 2) + a33*PNT(ip, jp, 2) \\ PNZ(ip, jp, kp, 3) &= a31*PNQ(jp, kp, 3) + a32*PNE(ip, kp, 3) + a33*PNT(ip, jp, 3) \\ PNZ(ip, jp, kp, 4) &= a31*PNQ(jp, kp, 4) + a32*PNE(ip, kp, 4) + a33*PNT(ip, jp, 4) \\ PNZ(ip, jp, kp, 5) &= a31*PNQ(jp, kp, 5) + a32*PNE(ip, kp, 5) + a33*PNT(ip, jp, 5) \\ PNZ(ip, jp, kp, 6) &= a31*PNQ(jp, kp, 6) + a32*PNE(ip, kp, 6) + a33*PNT(ip, jp, 6) \\ PNZ(ip, jp, kp, 7) &= a31*PNQ(jp, kp, 7) + a32*PNE(ip, kp, 7) + a33*PNT(ip, jp, 7) \\ PNZ(ip, jp, kp, 8) &= a31*PNQ(jp, kp, 8) + a32*PNE(ip, kp, 8) + a33*PNT(ip, jp, 8) \end{aligned}$$

enddo  
enddo  
enddo

$$\begin{bmatrix} \frac{\partial N_i}{\partial x} \\ \frac{\partial N_i}{\partial y} \\ \frac{\partial N_i}{\partial z} \end{bmatrix} = \begin{bmatrix} \frac{\partial x}{\partial \xi} & \frac{\partial y}{\partial \xi} & \frac{\partial z}{\partial \xi} \\ \frac{\partial x}{\partial \eta} & \frac{\partial y}{\partial \eta} & \frac{\partial z}{\partial \eta} \\ \frac{\partial x}{\partial \zeta} & \frac{\partial y}{\partial \zeta} & \frac{\partial z}{\partial \zeta} \end{bmatrix}^{-1} \begin{bmatrix} \frac{\partial N_i}{\partial \xi} \\ \frac{\partial N_i}{\partial \eta} \\ \frac{\partial N_i}{\partial \zeta} \end{bmatrix} = \begin{bmatrix} a_{11} & a_{12} & a_{13} \\ a_{21} & a_{22} & a_{23} \\ a_{31} & a_{32} & a_{33} \end{bmatrix} \begin{bmatrix} \frac{\partial N_i}{\partial \xi} \\ \frac{\partial N_i}{\partial \eta} \\ \frac{\partial N_i}{\partial \zeta} \end{bmatrix}$$

# MAT\_ASS\_MAIN (5/6)

```

!C
!C== CONSTRUCT the GLOBAL MATRIX
do ie= 1, 8
  ip = nodLOCAL(ie)
do je= 1, 8
  jp = nodLOCAL(je)

kk= 0
if (jp.ne. ip) then
  iIS= index(ip-1) + 1
  iIE= index(ip )
do k= iIS, iIE
  if ( item(k). eq. jp ) then
    kk= k
    exit
  endif
enddo
endif

```


Non-Zero Off-Diagonal Block  
in Global Matrix

$$A_{ip,jp}$$


kk: address in “item”

ip= nodLOCAL[ie]  
jp= nodLOCAL[je]


Node ID (ip,jp)  
starting from 1

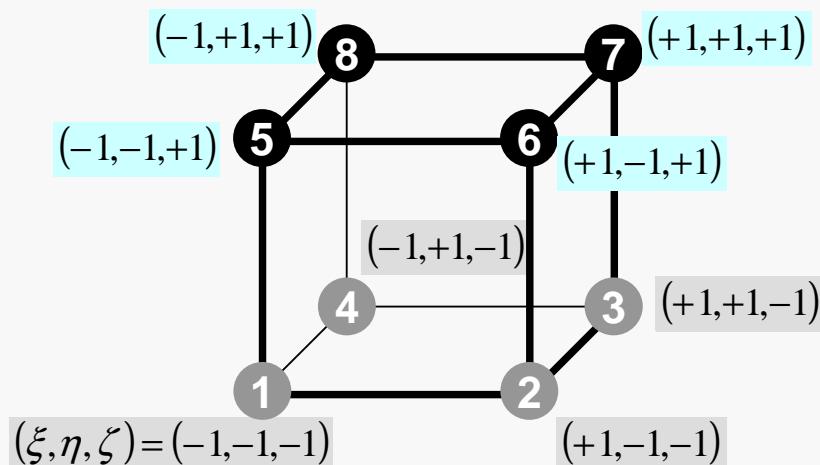

# Element Matrix: 8x8

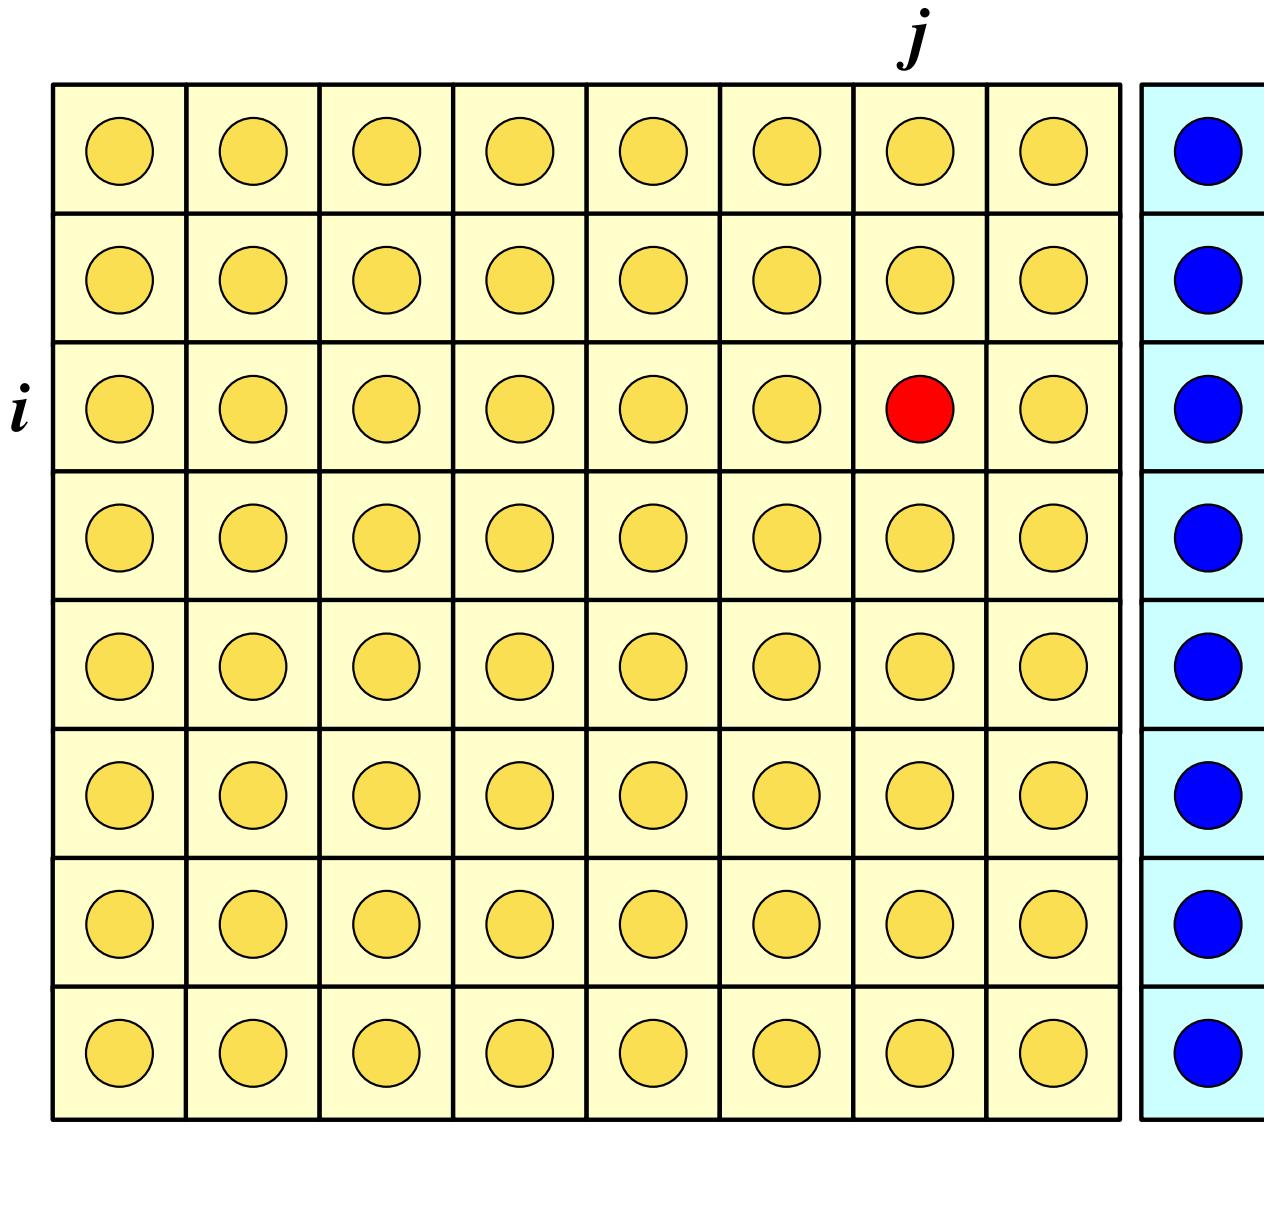

$$[k_{ij}] \quad (i, j = 1 \dots 8)$$

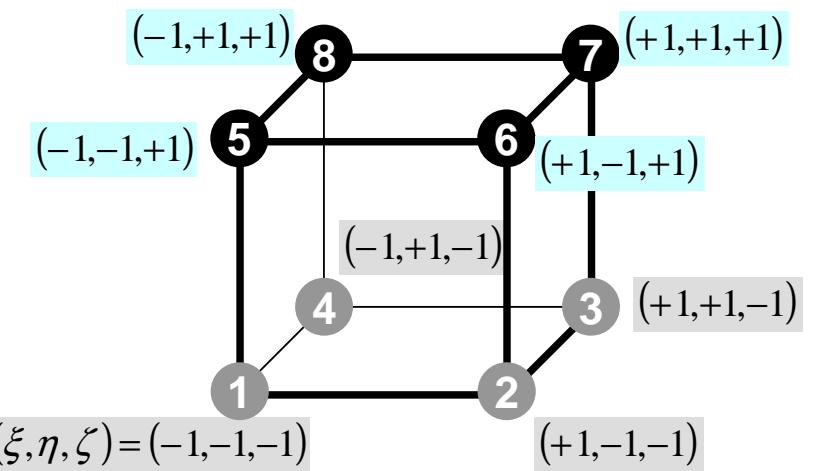

# MAT\_ASS\_MAIN (5/6)


```

!C
!C== CONSTRUCT the GLOBAL MATRIX
do ie= 1, 8
  ip = nodLOCAL(ie)
do je= 1, 8
  jp = nodLOCAL(je)

kk= 0
if (jp.ne. ip) then
  iiS= index(ip-1) + 1
  iiE= index(ip )
do k= iiS, iiE
  if ( item(k). eq. jp ) then
    kk= k
    exit
  endif
enddo
endif

```

Element Matrix ( $i_e \sim j_e$ ): Local ID  
 Global Matrix ( $i_p \sim j_p$ ): Global ID  
 kk : address in “item” starting from “1”  
 k: starting from “1”  
 ip,jp: starting from “1”

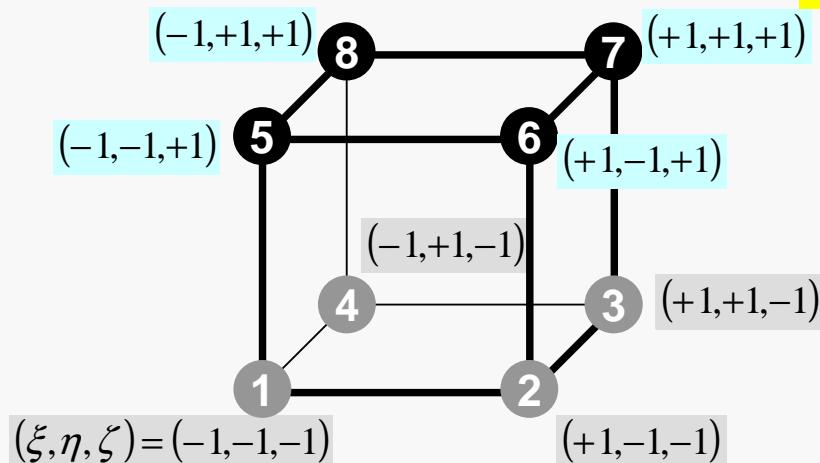

# MAT\_ASS\_MAIN (6/6)

```

QV0 = 0. d0
COEF i j= 0. d0
do kpn= 1, 2
do jpn= 1, 2
do ipn= 1, 2
  coef= WEI(ipn)*WEI(jpn)*WEI(kpn)

  PNXi= PNX(ipn, jpn, kpn, ie)
  PNYi= PNY(ipn, jpn, kpn, ie)
  PNZi= PNZ(ipn, jpn, kpn, ie)

  PNXj= PNX(ipn, jpn, kpn, je)
  PNYj= PNY(ipn, jpn, kpn, je)
  PNZj= PNZ(ipn, jpn, kpn, je)

  COEFij= COEFij + coef * CONDO *
& & (PNXi*PNXj+PNYi*PNYj+PNZi*PNZj) *
  DETJ(ipn, jpn, kpn)

  SHi= SHAPE(ipn, jpn, kpn, ie)
  QV0= QV0 + SHi * QVOL * coef * DETJ(ipn, jpn, kpn)
enddo
enddo
enddo

if (jp, eq, ip) then
  D(ip)= D(ip) + COEFij
  B(ip)= B(ip) + QV0*QVC
else
  AMAT(kk)= AMAT(kk) + COEFij
endif
enddo
enddo
enddo

return
end

```

$$\int_{-1}^{+1} \int_{-1}^{+1} \int_{-1}^{+1} \left\{ \lambda \frac{\partial N_i}{\partial x} \frac{\partial N_j}{\partial x} + \lambda \frac{\partial N_i}{\partial y} \frac{\partial N_j}{\partial y} + \lambda \frac{\partial N_i}{\partial z} \frac{\partial N_j}{\partial z} \right\} \det|J| d\xi d\eta d\zeta$$

# MAT\_ASS\_MAIN (6/6)

```

QV0 = 0. d0
COEF i j= 0. d0
do kpn= 1, 2
do jpn= 1, 2
do ipn= 1, 2
  coef= WEI(ipn)*WEI(jpn)*WEI(kpn)

  PNXi= PNX(ipn, jpn, kpn, ie)
  PNYi= PNY(ipn, jpn, kpn, ie)
  PNZi= PNZ(ipn, jpn, kpn, ie)

  PNXj= PNX(ipn, jpn, kpn, je)
  PNYj= PNY(ipn, jpn, kpn, je)
  PNZj= PNZ(ipn, jpn, kpn, je)

  COEFij= COEFij + coef * CONDO *
& &
  (PNXi*PNXj+PNYi*PNYj+PNZi*PNZj) *
  DETJ(ipn, jpn, kpn)

  SHi= SHAPE(ipn, jpn, kpn, ie)
  QV0= QV0 + SHi * QVOL * coef * DETJ(ipn, jpn)
enddo
enddo
enddo

if (jp, eq, ip) then
  D(ip)= D(ip) + COEFij
  B(ip)= B(ip) + QV0*QVC
else
  AMAT(kk)= AMAT(kk) + COEFij
endif
enddo
enddo
enddo

return
end

```

$$\begin{aligned}
I &= \int_{-1}^{+1} \int_{-1}^{+1} \int_{-1}^{+1} f(\xi, \eta, \zeta) d\xi d\eta d\zeta \\
&= \sum_{i=1}^L \sum_{j=1}^M \sum_{k=1}^N [W_i \cdot W_j \cdot W_k] \cdot [f(\xi_i, \eta_j, \zeta_k)]
\end{aligned}$$

$$\int_{-1}^{+1} \int_{-1}^{+1} \int_{-1}^{+1} \left\{ \lambda \frac{\partial N_i}{\partial x} \frac{\partial N_j}{\partial x} + \lambda \frac{\partial N_i}{\partial y} \frac{\partial N_j}{\partial y} + \lambda \frac{\partial N_i}{\partial z} \frac{\partial N_j}{\partial z} \right\} \det|J| d\xi d\eta d\zeta$$

# MAT\_ASS\_MAIN (6/6)

```
do kpn= 1, 2
do jpn= 1, 2
do ipn= 1, 2
  coef= WEI(ipn)*WEI(jpn)*WEI(kpn)
```

PNX i= PNX(ipn, jpn, kpn, ie)  
 PNY i= PNY(ipn, jpn, kpn, ie)  
 PNZ i= PNZ(ipn, jpn, kpn, ie)

PNX j= PNX(ipn, jpn, kpn, je)  
 PNY j= PNY(ipn, jpn, kpn, je)  
 PNZ j= PNZ(ipn, jpn, kpn, je)

& COEF i j= COEF i j + coef \* CONDO \* (PNX i\*PNX j+PNY i\*PNY j+PNZ i\*PNZ j) \*  
 DETJ(ipn, jpn, kpn)

enddo  
 enddo  
 enddo

$$\text{coef} = W_i \cdot W_j \cdot W_k$$

$$\begin{aligned} I &= \int_{-1}^{+1} \int_{-1}^{+1} \int_{-1}^{+1} f(\xi, \eta, \zeta) d\xi d\eta d\zeta \\ &= \sum_{i=1}^L \sum_{j=1}^M \sum_{k=1}^N [W_i \cdot W_j \cdot W_k] \cdot [f(\xi_i, \eta_j, \zeta_k)] \end{aligned}$$

$$\int_{-1}^{+1} \int_{-1}^{+1} \int_{-1}^{+1} \left\{ \lambda \frac{\partial N_i}{\partial x} \frac{\partial N_j}{\partial x} + \lambda \frac{\partial N_i}{\partial y} \frac{\partial N_j}{\partial y} + \lambda \frac{\partial N_i}{\partial z} \frac{\partial N_j}{\partial z} \right\} \det|J| d\xi d\eta d\zeta$$

# MAT\_ASS\_MAIN (6/6)

```
do kpn= 1, 2
do jpn= 1, 2
do ipn= 1, 2
  coef= WEI(ipn)*WEI(jpn)*WEI(kpn)
```

PNX i= PNX(ipn, jpn, kpn, ie)  
 PNY i= PNY(ipn, jpn, kpn, ie)  
 PNZ i= PNZ(ipn, jpn, kpn, ie)

PNX j= PNX(ipn, jpn, kpn, je)  
 PNY j= PNY(ipn, jpn, kpn, je)  
 PNZ j= PNZ(ipn, jpn, kpn, je)

& COEF i j= COEF i j + coef \* CONDO \* (PNX i\*PNX j+PNY i\*PNY j+PNZ i\*PNZ j) \*  
 DETJ(ipn, jpn, kpn)

enddo  
 enddo  
 enddo

$$\text{coef} = W_i \cdot W_j \cdot W_k$$

$$\begin{aligned} I &= \int_{-1}^{+1} \int_{-1}^{+1} \int_{-1}^{+1} f(\xi, \eta, \zeta) d\xi d\eta d\zeta \\ &= \sum_{i=1}^L \sum_{j=1}^M \sum_{k=1}^N [W_i \cdot W_j \cdot W_k] \cdot [f(\xi_i, \eta_j, \zeta_k)] \end{aligned}$$

$$\int_{-1}^{+1} \int_{-1}^{+1} \int_{-1}^{+1} \left\{ \lambda \frac{\partial N_i}{\partial x} \frac{\partial N_j}{\partial x} + \lambda \frac{\partial N_i}{\partial y} \frac{\partial N_j}{\partial y} + \lambda \frac{\partial N_i}{\partial z} \frac{\partial N_j}{\partial z} \right\} \det|J| d\xi d\eta d\zeta$$

# MAT\_ASS\_MAIN (6/6)

```

QVO = 0. d0
COEF i j= 0. d0
do kpn= 1, 2
do jpn= 1, 2
do ipn= 1, 2
  coef= WEI(ipn)*WEI(jpn)*WEI(kpn)

  PNXi= PNX(ipn, jpn, kpn, ie)
  PNYi= PNY(ipn, jpn, kpn, ie)
  PNZi= PNZ(ipn, jpn, kpn, ie)

  PNXj= PNX(ipn, jpn, kpn, je)
  PNYj= PNY(ipn, jpn, kpn, je)
  PNZj= PNZ(ipn, jpn, kpn, je)

& COEFinj= COEFinj + coef * CONDO *
  (PNXi*PNXj+PNYi*PNYj+PNZi*PNZj) *
  DETJ(ipn, jpn, kpn)

  SHi= SHAPE(ipn, jpn, kpn, ie)
  QV0= QV0 + SHi * QVOL * coef * DETJ(ipn, jpn, kpn)
enddo
enddo
enddo


if (jp.eq.ip) then
  D(ip)= D(ip) + COEFinj
  B(ip)= B(ip) + QV0*QVC
else
  AMAT(kk)= AMAT(kk) + COEFinj
endif

enddo
enddo
enddo

return
end

```

$$\left| k_{ii} \right| \quad (i, j = 1 \dots 8)$$

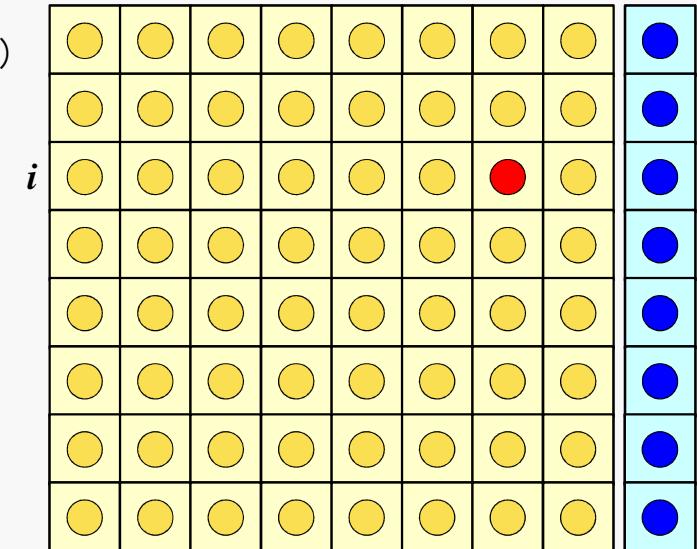

# MAT\_ASS\_MAIN (6/6)

```

QV0 = 0. d0
COEF i j= 0. d0
do kpn= 1, 2
do jpn= 1, 2
do ipn= 1, 2
  coef= WEI(ipn)*WEI(jpn)*WEI(kpn)

  PNXi= PNX(ipn, jpn, kpn, ie)
  PNYi= PNY(ipn, jpn, kpn, ie)
  PNZi= PNZ(ipn, jpn, kpn, ie)

  PNXj= PNX(ipn, jpn, kpn, je)
  PNYj= PNY(ipn, jpn, kpn, je)
  PNZj= PNZ(ipn, jpn, kpn, je)

  COEFij= COEFij + coef * CONDO *
  & (PNXi*PNXj+PNYi*PNYj+PNZi*PNZj) *
  & DETJ(ipn, jpn, kpn)

  SHi= SHAPE(ipn, jpn, kpn, ie)
  QVO= QVO + SHi * QVOL * coef * DETJ(ipn, jpn, kpn)
enddo
enddo
enddo

if (jp.eq.ip) then
  D(ip)= D(ip) + COEFij
  B(ip)= B(ip) + QVO*QVC
else
  AMAT(kk)= AMAT(kk) + COEFij
endif
enddo
enddo
enddo

return
end

```

$$[k]^{(e)} \{\phi\}^{(e)} = \{f\}^{(e)}$$

$$[f]^{(e)} = \int_V \dot{Q}[N]^T dV$$

$$\dot{Q}(x, y, z) = QVOL |x_C + y_C|$$

$$QVC = |x_C + y_C|$$

$$QV0 = \int_V QVOL [N]^T dV$$

$$[f]^{(e)} = QV0 \cdot QVC$$

# MAT\_ASS\_MAIN (6/6)

```
do kpn= 1, 2
do jpn= 1, 2
do ipn= 1, 2
```

coef= WEI(ipn)\*WEI(jpn)\*WEI(kpn)

$$\text{coef} = W_i \cdot W_j \cdot W_k$$

SHi= SHAPE(ipn, jpn, kpn, ie)

QV0= QV0 + SHi \* QVOL \* coef \* DETJ(ipn, jpn, kpn)

```
enddo
enddo
enddo
```

$$\begin{aligned} I &= \int_{-1}^{+1} \int_{-1}^{+1} \int_{-1}^{+1} f(\xi, \eta, \zeta) d\xi d\eta d\zeta \\ &= \sum_{i=1}^L \sum_{j=1}^M \sum_{k=1}^N [W_i \cdot W_j \cdot W_k] \cdot [f(\xi_i, \eta_j, \zeta_k)] \end{aligned}$$

$$\int_V QVOL[N]^T dV = \iiint QVOL[N] dx dy dz = \int_{-1}^{+1} \int_{-1}^{+1} \int_{-1}^{+1} \{QVOL N_i\} \det|J| d\xi d\eta d\zeta$$

# MAT\_ASS\_MAIN (6/6)

```
do kpn= 1, 2
do jpn= 1, 2
do ipn= 1, 2
```

coef= WEI(ipn)\*WEI(jpn)\*WEI(kpn)

$$\text{coef} = W_i \cdot W_j \cdot W_k$$

SHi= SHAPE(ipn, jpn, kpn, ie)

QV0= QV0 + SHi \* QVOL \* coef \* DETJ(ipn, jpn, kpn)

```
enddo
enddo
enddo
```

$$\begin{aligned} I &= \int_{-1}^{+1} \int_{-1}^{+1} \int_{-1}^{+1} f(\xi, \eta, \zeta) d\xi d\eta d\zeta \\ &= \sum_{i=1}^L \sum_{j=1}^M \sum_{k=1}^N [W_i \cdot W_j \cdot W_k] \cdot [f(\xi_i, \eta_j, \zeta_k)] \end{aligned}$$

$$\int_V QVOL[N]^T dV = \iiint QVOL[N] dx dy dz = \int_{-1}^{+1} \int_{-1}^{+1} \int_{-1}^{+1} \{QVOL N_i\} \det|J| d\xi d\eta d\zeta$$

# MAT\_ASS\_MAIN (6/6)

```

QVO = 0. d0
COEF i j= 0. d0
do kpn= 1, 2
do jpn= 1, 2
do ipn= 1, 2
  coef= WEI(ipn)*WEI(jpn)*WEI(kpn)

  PNXi= PNX(ipn, jpn, kpn, ie)
  PNYi= PNY(ipn, jpn, kpn, ie)
  PNZi= PNZ(ipn, jpn, kpn, ie)

  PNXj= PNX(ipn, jpn, kpn, je)
  PNYj= PNY(ipn, jpn, kpn, je)
  PNZj= PNZ(ipn, jpn, kpn, je)

  COEFij= COEFij + coef * CONDO *
  & (PNXi*PNXj+PNYi*PNYj+PNZi*PNZj) *
  & DETJ(ipn, jpn, kpn)

  SHi= SHAPE(ipn, jpn, kpn, ie)
  QVO= QVO + SHi * QVOL * coef * DETJ(ipn, jpn, kpn)
enddo
enddo
enddo

if (jp.eq.ip) then
  D(ip)= D(ip) + COEFij
  B(ip)= B(ip) + QVO*QVC
else
  AMAT(kk)= AMAT(kk) + COEFij
endif
enddo
enddo
enddo

return
end

```

$$[k]^{(e)} \{\phi\}^{(e)} = \{f\}^{(e)}$$

$$[f]^{(e)} = \int_V \dot{Q}[N]^T dV$$

$$\dot{Q}(x, y, z) = QVOL |x_C + y_C|$$

$$QV0 = \int_V QVOL [N]^T dV$$

$$QVC = |x_C + y_C|$$


$$[f]^{(e)} = QV0 \cdot QVC$$

# MAT\_ASS\_BC: Overview

```
do i= 1, N      Loop for Nodes
  "Mark" nodes where Dirichlet B.C. are applied (IWKX)
enddo
```

```
do i= 1, N      Loop for Nodes
  if (IWKX(i,1).eq.1) then    if "marked" nodes
    corresponding components of RHS (B),
    Diagonal (D) are corrected
    do k= index(i-1)+1, index(i)  Non-Zero Off-Diagonal Nodes
      corresponding comp. of non-zero off-diagonal
      components (AMAT) are corrected
    enddo
  endif
enddo
```

```
do i= 1, N      Loop for Nodes
  do k= index(i-1)+1, index(i)
    if (IWKX(item(k), 1).eq. 1) then
      corresponding components of RHS and AMAT are corrected (col.)
    endif
  enddo
enddo
```

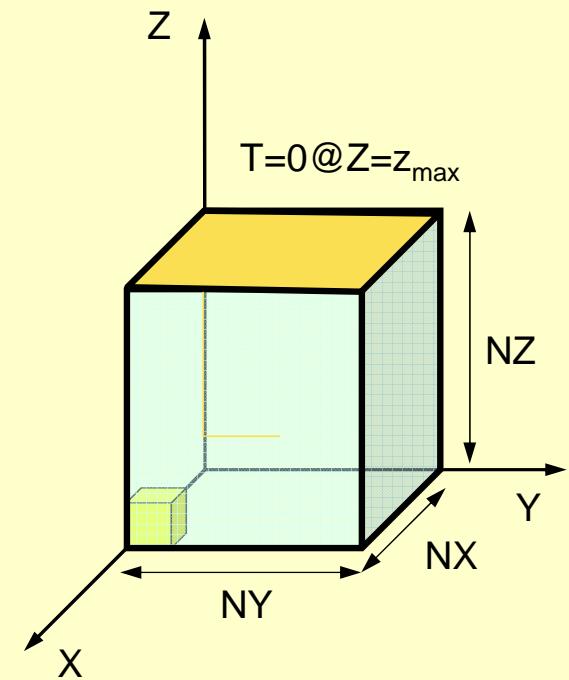

# MAT\_ASS\_BC (1/2)

```

subroutine MAT_ASS_BC
use pfem_util
implicit REAL*8 (A-H, 0-Z)

allocate (IWKX(N, 2))
IWKX= 0

!C
!C== Z=Zmax

do in= 1, N
    IWKX(in, 1)= 0
enddo

ib0= -1
do ib0= 1, NODGRPtot
    if (NODGRP_NAME(ib0).eq. 'Zmax') exit
enddo

do ib= NODGRP_INDEX(ib0-1)+1, NODGRP_INDEX(ib0)
    in= NODGRP_ITEM(ib)
    IWKX(in, 1)= 1
enddo

```

If the node “in” is included in the node group “Zmax”

IWKX(in,1)= 1

# MAT\_ASS\_BC (2/2)


```
do in= 1, N
  if (IWKX(in, 1).eq. 1) then
    B(in)= 0. d0
    D(in)= 1. d0

    iS= index(in-1) + 1
    iE= index(in )
    do k= iS, iE
      AMAT(k)= 0. d0
    enddo
  endif
enddo

do in= 1, N
  iS= index(in-1) + 1
  iE= index(in )
  do k= iS, iE
    if (IWKX(item(k), 1).eq. 1) then
      AMAT(k)= 0. d0
    endif
  enddo
enddo

!C==
return
end
```

# 1D Steady State Heat Conduction

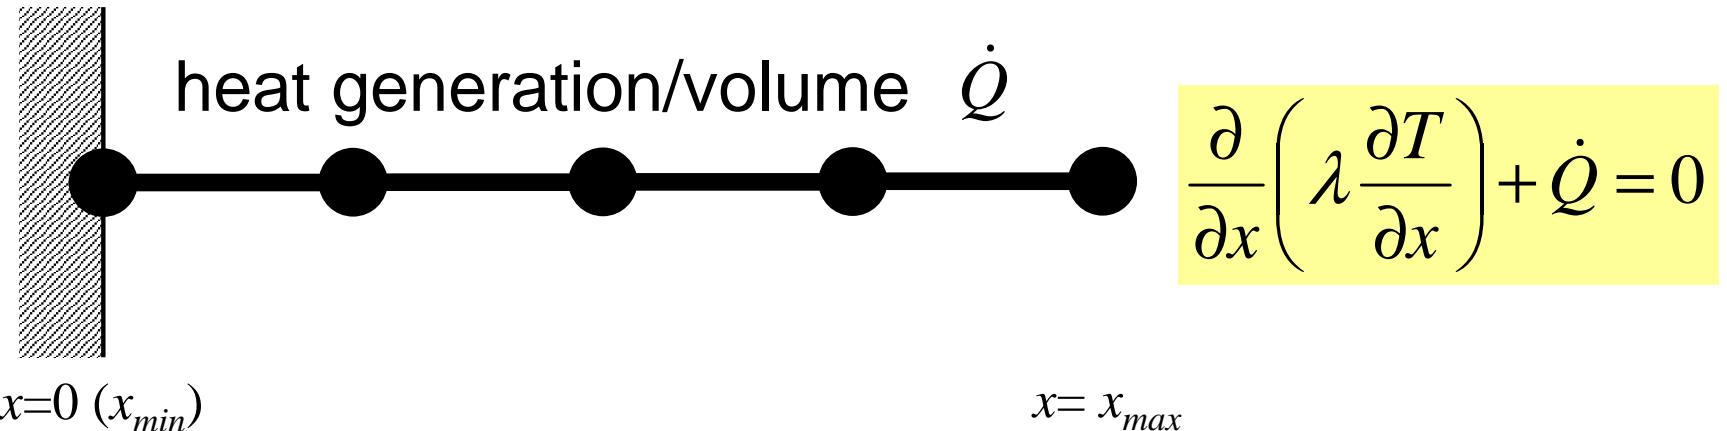


- Uniform: Sectional Area:  $A$ , Thermal Conductivity:  $\lambda$
- Heat Generation Rate/Volume/Time [QL<sup>-3</sup>T<sup>-1</sup>]  $\dot{Q}$
- Boundary Conditions
  - $x=0$  :  $T=0$  (Fixed Temperature)
  - $x=x_{max}$  :  $\frac{\partial T}{\partial x}=0$  (Insulated)

1D

# (Linear) Equation at $x=0$

$$T_I = 0 \text{ (or } T_0 = 0\text{)}$$

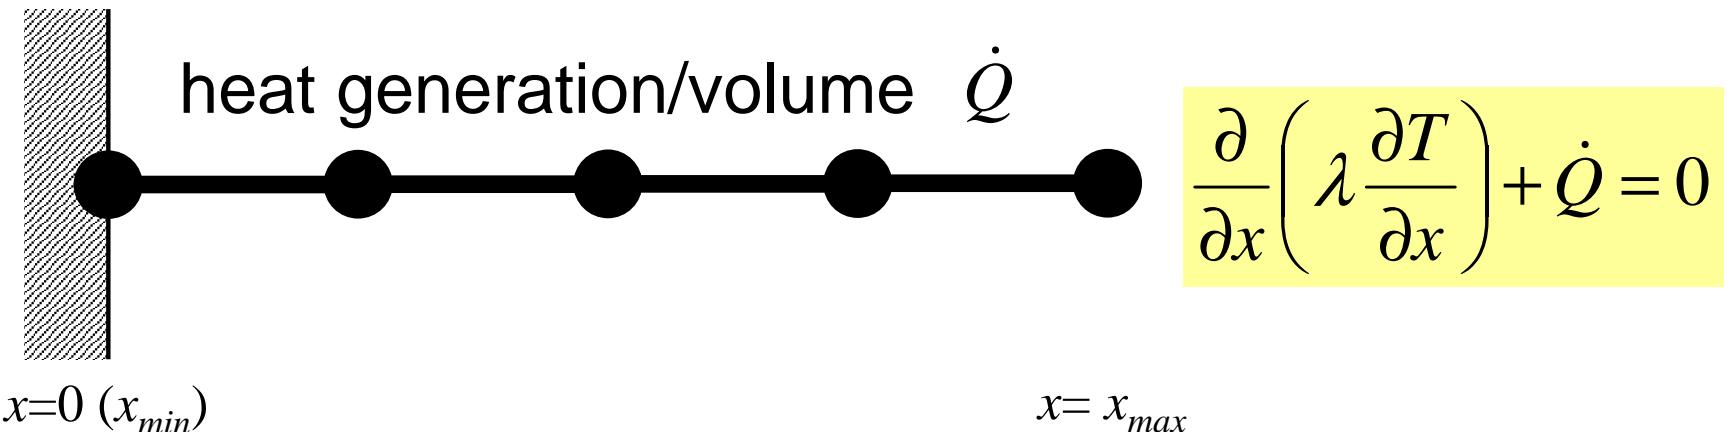

$$\frac{\partial}{\partial x} \left( \lambda \frac{\partial T}{\partial x} \right) + \dot{Q} = 0$$

- Uniform: Sectional Area:  $A$ , Thermal Conductivity:  $\lambda$
- Heat Generation Rate/Volume/Time [QL<sup>-3</sup>T<sup>-1</sup>]  $\dot{Q}$
- Boundary Conditions
  - $x=0$  :  $T=0$  (Fixed Temperature)
  - $x=x_{max}$  :  $\frac{\partial T}{\partial x}=0$  (Insulated)

# Program: 1d.f (6/6)

## Dirichlet B.C. @ X=0

```

!C
!C +-----+
!C | BOUNDARY CONDITIONS |
!C +-----+
!C==

!C
!C-- X=Xmin
    i= 1
    jS= INDEX(i-1)

    AMAT(jS+1)= 0. d0
    DIAG(i)= 1. d0
    RHS (i)= 0. d0

    do k= 1, NPLU
        if (ITEM(k).eq. 1) AMAT(k)= 0. d0
    enddo
!C==


```

$$T_1 = 0$$

Diagonal Component=1

RHS=0

Off-Diagonal Components= 0.

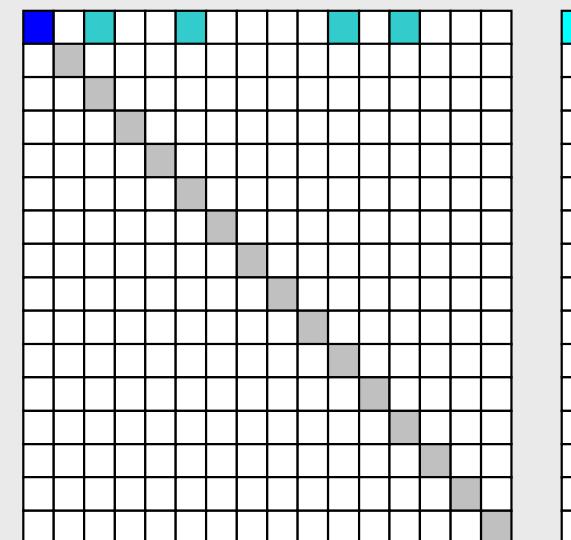

# Program: 1d.f (6/6)

## Dirichlet B.C. @ X=0

```

!C
!C +-----+
!C | BOUNDARY CONDITIONS |
!C +-----+
!C==

!C
!C-- X=Xmin
    i= 1
    jS= INDEX(i-1)

    AMAT(jS+1)= 0. d0
    DIAG(i)= 1. d0
    RHS (i)= 0. d0

    do k= 1, NPLU
        if (ITEM(k).eq. 1) AMAT(k)= 0. d0
    enddo
!C==

```


$$T_1 = 0$$

Diagonal Component=1

RHS=0

Off-Diagonal Components= 0.

**Erase !**

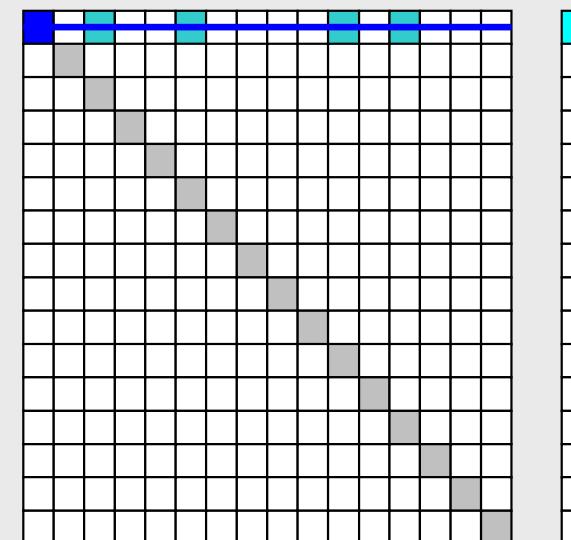

# Program: 1d.f (6/6)

## Dirichlet B.C. @ X=0

```

!C
!C +-----+
!C | BOUNDARY CONDITIONS |
!C +-----+
!C==

!C
!C-- X=Xmin
    i= 1
    jS= INDEX(i-1)

    AMAT(jS+1)= 0. d0
    DIAG(i)= 1. d0
    RHS (i)= 0. d0

    do k= 1, NPLU
        if (ITEM(k).eq. 1) AMAT(k)= 0. d0
    enddo
!C==

```


$$T_1=0$$

Diagonal Component=1

RHS=0

Off-Diagonal Components= 0.

### Elimination and Erase

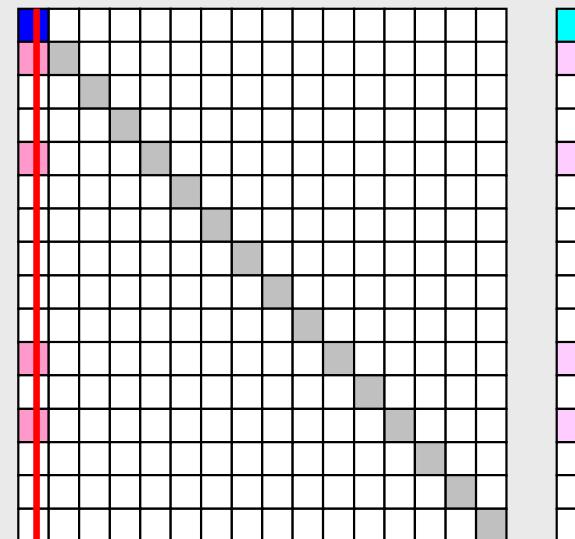

Column components of boundary nodes (Dirichlet B.C.) are moved to RHS and eliminated for keeping symmetrical feature of the matrix (in this case just erase off-diagonal components)

**if  $T_I \neq 0$**

```

!C
!C +-----+
!C | BOUNDARY CONDITIONS |
!C +-----+
!C==

!C
!C-- X=Xmin
    i= 1
    jS= INDEX(i-1)

    AMAT(jS+1)= 0. d0
    DIAG(i)= 1. d0
    RHS (i)= PHImin

    do i= 1, N
        do k= INDEX(i-1)+1, INDEX(i)
            if (ITEM(k).eq. 1) then
                RHS (i)= RHS(i) - AMAT(k)*PHImin
                AMAT(k)= 0. d0
            endif
        enddo
    enddo
!C==

```

Column components of boundary nodes (Dirichlet B.C.) are moved to RHS and eliminated for keeping symmetrical feature of the matrix.

$$Diag_j \phi_j + \sum_{k=Index[j]}^{Index[j+1]-1} Amat_k \phi_{Item[k]} = Rhs_j$$

if  $T_I \neq 0$

```

!C
!C +-----+
!C | BOUNDARY CONDITIONS |
!C +-----+
!C==

!C
!C-- X=Xmin
    i= 1
    jS= INDEX(i-1)

    AMAT(jS+1)= 0. d0
    DIAG(i)= 1. d0
    RHS (i)= PHImin

    do i= 1, N
        do k= INDEX(i-1)+1, INDEX(i)
            if (ITEM(k).eq. 1) then
                RHS (i)= RHS(i) - AMAT(k)*PHImin
                AMAT(k)= 0. d0
            endif
        enddo
    enddo

!C===

```

$$\begin{aligned}
& Diag_j \phi_j + \sum_{k=Index[j], k \neq k_s}^{Index[j+1]-1} Amat_k \phi_{Item[k]} \\
& = Rhs_j - Amat_{k_s} \phi_{Item[k_s]} \\
& = Rhs_j - Amat_{k_s} \phi_{min} \quad \text{where } Item[k_s] = 1
\end{aligned}$$

Column components of boundary nodes (Dirichlet B.C.) are moved to RHS and eliminated for keeping symmetrical feature of the matrix.

# MAT\_ASS\_BC (2/2)

```

do in= 1, N
  if (IWKX(in, 1). eq. 1) then
    B(in)= 0. d0
    D(in)= 1. d0

    iS= index(in-1) + 1
    iE= index(in )
    do k= iS, iE
      AMAT(k)= 0. d0
    enddo
  endif
enddo

```

```

do in= 1, N
  iS= index(in-1) + 1
  iE= index(in )
  do k= iS, iE
    if (IWKX(item(k), 1). eq. 1) then
      AMAT(k)= 0. d0
    endif
  enddo
enddo

```

!C==


```

return
end

```

Boundary Nodes:  
IWKX(in,1)=1

Erase !!

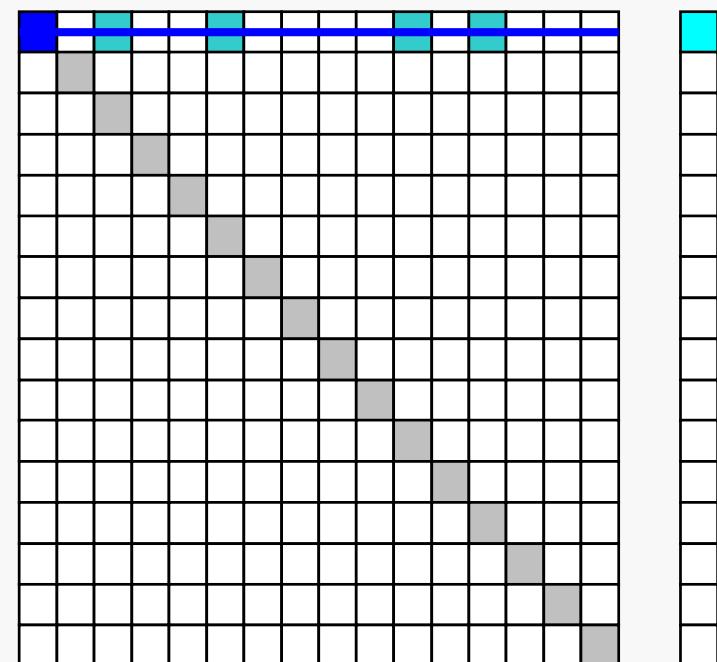

Same as 1D case

# MAT\_ASS\_BC (2/2)

```

do in= 1, N
  if (IWKX(in, 1).eq. 1) then
    B(in)= 0. d0
    D(in)= 1. d0

    iS= index(in-1) + 1
    iE= index(in )
    do k= iS, iE
      AMAT(k)= 0. d0
    enddo
  endif
enddo

```

```

do in= 1, N
  iS= index(in-1) + 1
  iE= index(in )
  do k= iS, iE
    if (IWKX(item(k), 1).eq. 1) then
      AMAT(k)= 0. d0
    endif
  enddo
enddo

```


!C==

```

return
end

```


Boundary Nodes:  
IWKX(in,1)=1

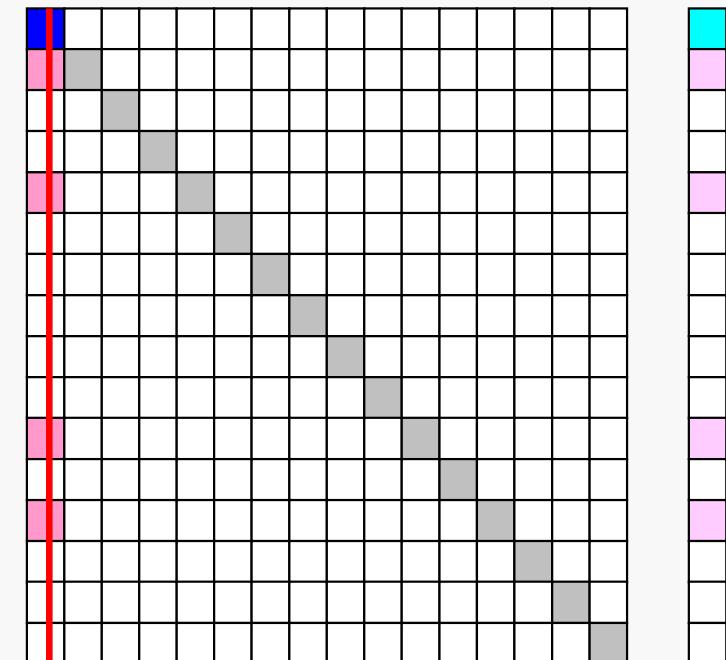

Elimination and  
Erase

Same as 1D case

# Structure of heat3D

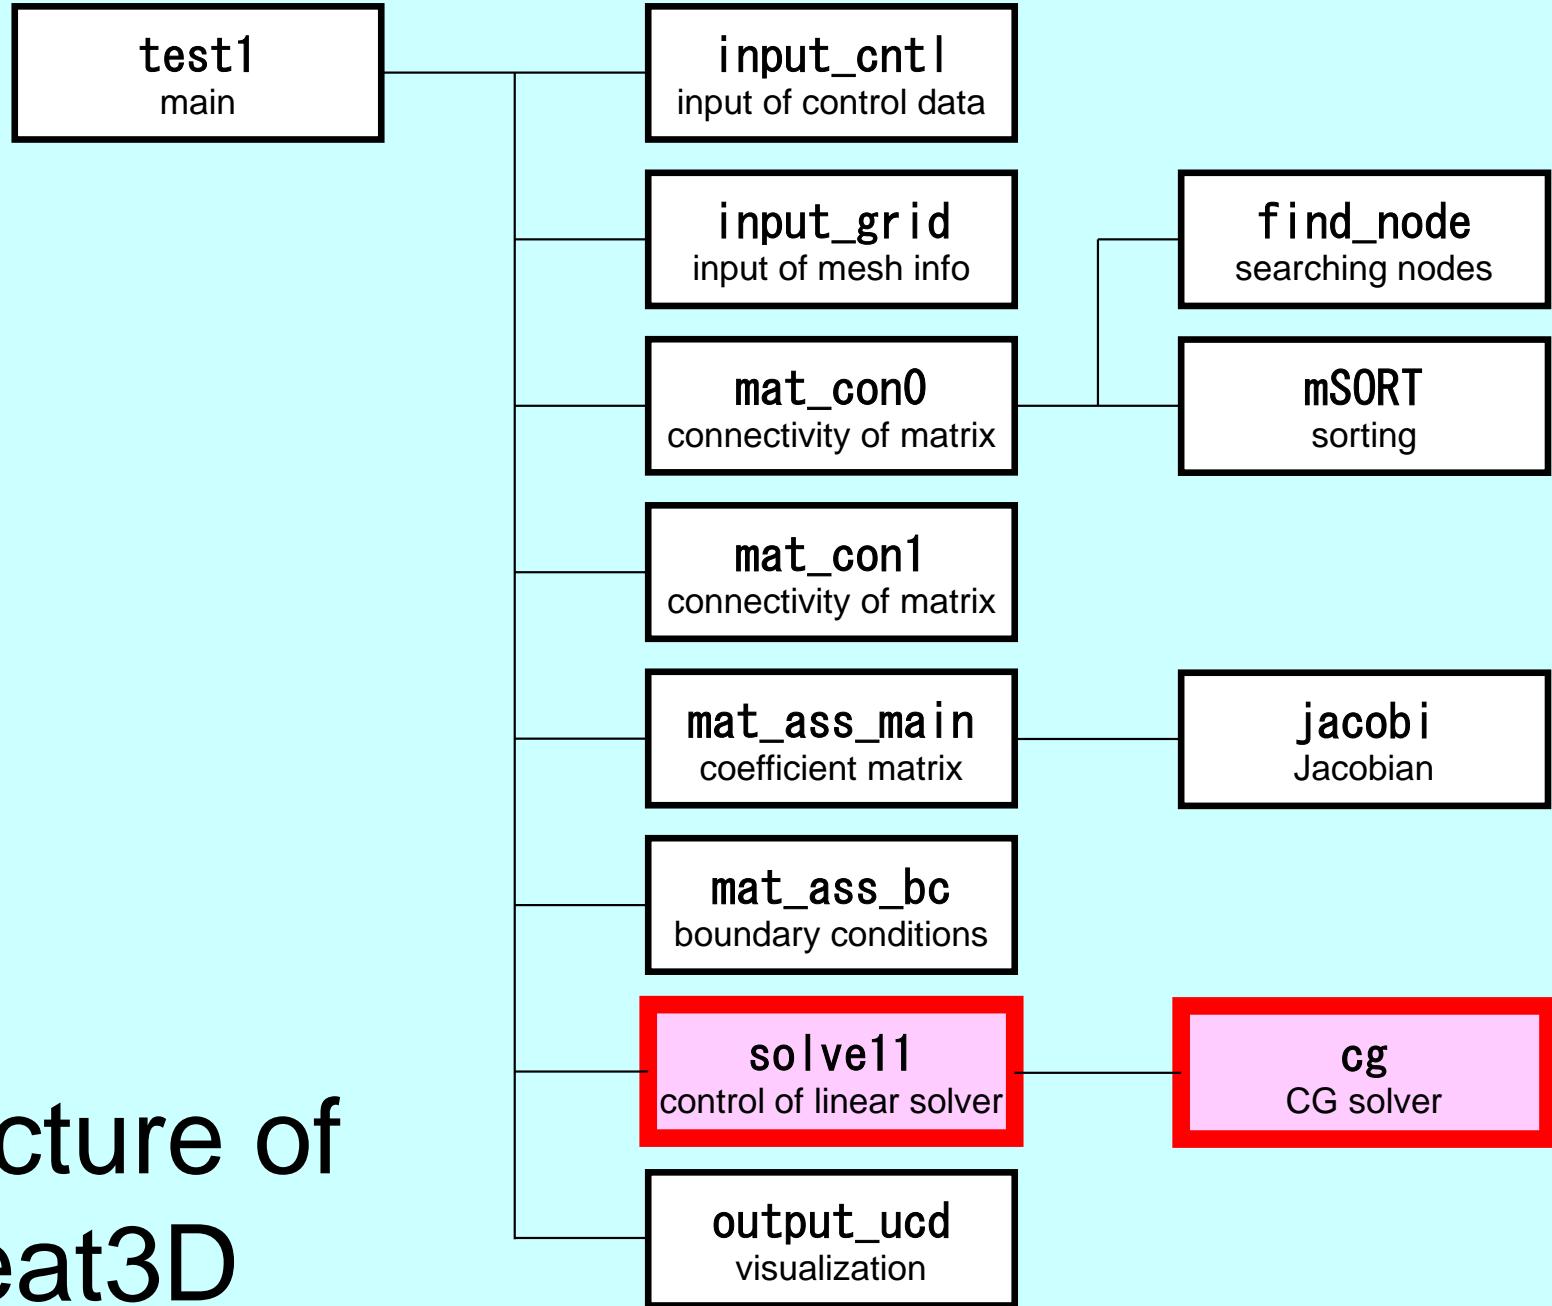


# Main Part

```

program heat3D
use solver11
use pfem_util
implicit REAL*8 (A-H, 0-Z)
call INPUT_CNTL
call INPUT_GRID
call MAT_CON0
call MAT_CON1
call MAT_ASS_MAIN
call MAT_ASS_BC
call SOLVE11
call OUTPUT_UCD
do i= 1, N
& if (XYZ(i, 1).eq. 0. d0. and. XYZ(i, 2).eq. 0. d0
& . and. XYZ(i, 3).eq. 0. d0) then
  write (*, '(i8, 1pe16. 6)') i, X(i)
  endif
enddo
end program heat3D

```

1	4. 025833e+00
2	3. 628020e+00
3	3. 319234e+00
4	3. 073771e+00
(...)	
55	9. 238550e-07
56	3. 876258e-07
57	1. 854812e-07
58	1. 062119e-07
59	3. 541404e-08
60	1. 284087e-08
61	6. 073277e-09
1	3. 391200e+03

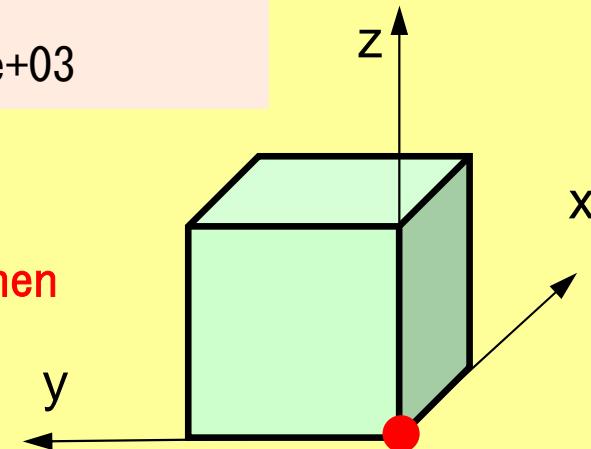

# SOLVE11

```
module SOLVER11
contains
  subroutine SOLVE11

    use pfem_util
    use solver_CG

    implicit REAL*8 (A-H, 0-Z)

    integer :: ERROR, ICFLAG
    character(len=char_length) :: BUF

    data ICFLAG/0/

!C
!C +-----+
!C | PARAMETERS |
!C +-----+
!C===
      ITER      = pfemIarray(1)          Max. Iterations for CG
      RESID     = pfemRarray(1)          Convergence Criteria for CG
!C===
!C
!C +-----+
!C | ITERATIVE solver |
!C +-----+
!C===
      & call CG
      & ( N, NPLU, D, AMAT, index, item, B, X, RESID, ITER, ERROR ) &
      ITERactual=ITER
!C===
      end subroutine SOLVE11
end module SOLVER11
```

# Preconditioned CG Solver

## Diagonal Scaling/Point Jacobi Preconditioning

```

Compute  $\mathbf{r}^{(0)} = \mathbf{b} - [\mathbf{A}]\mathbf{x}^{(0)}$ 
for i= 1, 2, ...
    solve  $[\mathbf{M}]\mathbf{z}^{(i-1)} = \mathbf{r}^{(i-1)}$ 
     $\rho_{i-1} = \mathbf{r}^{(i-1)} \cdot \mathbf{z}^{(i-1)}$ 
    if i=1
         $\mathbf{p}^{(1)} = \mathbf{z}^{(0)}$ 
    else
         $\beta_{i-1} = \rho_{i-1}/\rho_{i-2}$ 
         $\mathbf{p}^{(i)} = \mathbf{z}^{(i-1)} + \beta_{i-1} \mathbf{p}^{(i-1)}$ 
    endif
     $\mathbf{q}^{(i)} = [\mathbf{A}]\mathbf{p}^{(i)}$ 
     $\alpha_i = \rho_{i-1}/\mathbf{p}^{(i)} \cdot \mathbf{q}^{(i)}$ 
     $\mathbf{x}^{(i)} = \mathbf{x}^{(i-1)} + \alpha_i \mathbf{p}^{(i)}$ 
     $\mathbf{r}^{(i)} = \mathbf{r}^{(i-1)} - \alpha_i \mathbf{q}^{(i)}$ 
    check convergence  $|\mathbf{r}|$ 
end

```

$$[M] = \begin{bmatrix} D_1 & 0 & \dots & 0 & 0 \\ 0 & D_2 & & 0 & 0 \\ \dots & & \dots & & \dots \\ 0 & 0 & & D_{N-1} & 0 \\ 0 & 0 & \dots & 0 & D_N \end{bmatrix}$$

# Diagonal Scaling, Point-Jacobi

$$[M] = \begin{bmatrix} D_1 & 0 & \dots & 0 & 0 \\ 0 & D_2 & & 0 & 0 \\ \dots & & \dots & & \dots \\ 0 & 0 & & D_{N-1} & 0 \\ 0 & 0 & \dots & 0 & D_N \end{bmatrix}$$

- **solve**  $[M]z^{(i-1)} = r^{(i-1)}$  is very easy.
- Provides fast convergence for simple problems.

# CG Solver (1/6)

```
module solver_CG
contains

subroutine CG
& (N, NPLU, D, AMAT, index, item, B, X, RESID, ITER, ERROR)

implicit REAL*8 (A-H, O-Z)
include 'precision.inc'

integer(kind=kint), intent(in):: N, NPLU
integer(kind=kint), intent(inout):: ITER, ERROR
real (kind=kreal), intent(inout):: RESID
real(kind=kreal), dimension(N) , intent(inout):: B, X, D
real(kind=kreal), dimension(NPLU), intent(inout):: AMAT
integer(kind=kint), dimension(0:N ), intent(in) :: index
integer(kind=kint), dimension(NPLU), intent(in) :: item

real(kind=kreal), dimension(:, :), allocatable :: WW

integer(kind=kint), parameter :: R= 1
integer(kind=kint), parameter :: Z= 2
integer(kind=kint), parameter :: Q= 2
integer(kind=kint), parameter :: P= 3
integer(kind=kint), parameter :: DD= 4

integer(kind=kint ) :: MAXIT
real    (kind=kreal) :: TOL, W, SS
```

# Variables/Arrays in CG Solver

Name	Type	Size	I/O	Definition
<b>N, NP</b>	I		I	# Node
<b>NPLU</b>	I		O	# Non-Zero Off-Diagonals
<b>D</b>	R	(N)	O	Diagonal Block of Global Matrix
<b>B, X</b>	R	(N)	O	RHS, Unknown Vector
<b>AMAT</b>	R	(NPLU)	O	Non-Zero Off-Diagonal Components of Global Matrix
<b>index</b>	I	(0:N)	O	# Non-Zero Off-Diagonal Components
<b>item</b>	I	(NPLU)	O	Column ID of Non-Zero Off-Diagonal Components
<b>ITER</b>	I		I/O	Number of CG Iterations (MAX: In, Actual: Out)
<b>RESID</b>	R		I/O	Convergence Criteria (In), Final Residual Norm (Out)
<b>MAXIT</b>	I		-	Maximum Number of CG Iterations
<b>TOL</b>	R		-	Convergence Criteria
<b>WW</b>	R	(N, 4)	-	Work Arrays
<b>P, Q, R, Z, DD</b>	I		-	Vector ID for <b>WW</b> (1-4)

# CG Solver (1/6)

```

module solver_CG
contains
    WW(i, 1)= WW(i, R)  => {r}
    WW(i, 2)= WW(i, Z)  => {z}
    WW(i, 2)= WW(i, Q)  => {q}
    WW(i, 3)= WW(i, P)  => {p}
    WW(i, 4)= WW(i, DD) => 1/{D}

    integer (kind=kint), intent(inout):: ITER, LRR0
    real (kind=kreal), intent(inout):: RESID
    real(kind=kreal), dimension(N) , intent(inout)
    real(kind=kreal), dimension(NPLU), intent(inout)
    integer(kind=kint ), dimension(0:N ), intent(in)
    integer(kind=kint ), dimension(NPLU), intent(in)

    real(kind=kreal), dimension(:, :), allocatable

    integer(kind=kint), parameter :: R= 1
    integer(kind=kint), parameter :: Z= 2
    integer(kind=kint), parameter :: Q= 2
    integer(kind=kint), parameter :: P= 3
    integer(kind=kint), parameter :: DD= 4

    integer(kind=kint ) :: MAXIT
    real   (kind=kreal) :: TOL, W, SS

```

Compute  $r^{(0)} = b - [A]x^{(0)}$

for  $i = 1, 2, \dots$

solve  $[M]z^{(i-1)} = r^{(i-1)}$

$\rho_{i-1} = r^{(i-1)} \cdot z^{(i-1)}$

if  $i = 1$

$p^{(1)} = z^{(0)}$

else

$\beta_{i-1} = \rho_{i-1} / \rho_{i-2}$

$p^{(i)} = z^{(i-1)} + \beta_{i-1} p^{(i-1)}$

endif

$q^{(i)} = [A]p^{(i)}$

$\alpha_i = \rho_{i-1} / p^{(i)} q^{(i)}$

$x^{(i)} = x^{(i-1)} + \alpha_i p^{(i)}$

$r^{(i)} = r^{(i-1)} - \alpha_i q^{(i)}$

check convergence  $|r|$

end

# CG Solver (2/6)

```

!C
!C +-----+
!C | INIT. |
!C +-----+
!C===
      ERROR= 0
      allocate (WW(N, 4))
      MAXIT  = ITER
      TOL    = RESID
      X = 0. d0
!C===

```

```

!C +-----+
!C | {r0}= {b} - [A] {xini} |
!C +-----+
!C===
      do j= 1, N
        WW(j, DD)= 1. d0/D(j)
        WVAL= B(j) - D(j)*X(j)
        do k= index(j-1)+1, index(j)
          i= item(k)
          WVAL= WVAL - AMAT(k)*X(i)
        enddo
        WW(j, R)= WVAL
      enddo

```

$$\begin{aligned}
 \text{WW}(i, 1) &= \text{WW}(i, R) \Rightarrow \{r\} \\
 \text{WW}(i, 2) &= \text{WW}(i, Z) \Rightarrow \{z\} \\
 \text{WW}(i, 2) &= \text{WW}(i, Q) \Rightarrow \{q\} \\
 \text{WW}(i, 3) &= \text{WW}(i, P) \Rightarrow \{p\} \\
 \text{WW}(i, 4) &= \text{WW}(i, DD) \Rightarrow 1/\{D\}
 \end{aligned}$$

Reciprocal numbers (逆数) of diagonal components are stored in  $\text{WW}(i, DD)$ . Computational cost for division is usually expensive.

# CG Solver (2/6)

```

!C
!C +-----+
!C | INIT. |
!C +-----+
!C===
      ERROR= 0
      allocate (WW(N, 4))
      MAXIT = ITER
      TOL   = RESID
      X = 0. d0
!C===
!C +-----+
!C | {r0} = {b} - [A] {xini} |
!C +-----+
!C===
      do j= 1, N
        WW(j, DD)= 1. d0/D(j)
        WVAL= B(j) - D(j)*X(j)
        do k= index(j-1)+1, index(j)
          i= item(k)
          WVAL= WVAL - AMAT(k)*X(i)
        enddo
        WW(j, R)= WVAL
      enddo

```

**Compute  $r^{(0)} = b - [A]x^{(0)}$**

for  $i = 1, 2, \dots$

solve  $[M]z^{(i-1)} = r^{(i-1)}$

$\rho_{i-1} = r^{(i-1)} \cdot z^{(i-1)}$

if  $i = 1$

$p^{(1)} = z^{(0)}$

else

$\beta_{i-1} = \rho_{i-1} / \rho_{i-2}$

$p^{(i)} = z^{(i-1)} + \beta_{i-1} p^{(i-1)}$

endif

$q^{(i)} = [A]p^{(i)}$

$\alpha_i = \rho_{i-1} / p^{(i)} q^{(i)}$

$x^{(i)} = x^{(i-1)} + \alpha_i p^{(i)}$

$r^{(i)} = r^{(i-1)} - \alpha_i q^{(i)}$

check convergence  $|r|$

end

# CG Solver (3/6)

```
BNRM2= 0. d0
do i= 1, N
  BNRM2= BNRM2 + B(i)**2
enddo

if (BNRM2. eq. 0. d0) BNRM2= 1. d0
ITER = 0
!C==

      do iter= 1, MAXIT
!C
!C***** Conjugate Gradient Iteration

!C
!C +-----+
!C | {z}= [Minv] {r} |
!C +-----+
!C==

      do i= 1, N
        WW(i, Z)= WW(i, R) * WW(i, DD)
      enddo
!C==
```

$\text{BNRM2} = |\mathbf{b}|^2$   
for convergence criteria  
of CG solvers

# CG Solver (3/6)

```

BNRM2= 0. d0
do i= 1, N
  BNRM2= BNRM2 + B(i)**2
enddo

if (BNRM2. eq. 0. d0) BNRM2= 1. d0
ITER = 0
!C===
      do iter= 1, MAXIT
!C
!C*****+
!C | {z}= [Minv] {r} |
!C +-----+
!C===
      do i= 1, N
        WW(i,Z)= WW(i,R) * WW(i,DD)
      enddo
!C===
      Compute r(0)= b-[A]x(0)
      for i= 1, 2, ...
        solve [M]z(i-1)= r(i-1)
        ρi-1= r(i-1) z(i-1)
        if i=1
          p(1)= z(0)
        else
          βi-1= ρi-1/ρi-2
          p(i)= z(i-1) + βi-1 p(i-1)
        endif
        q(i)= [A]p(i)
        αi = ρi-1/p(i)q(i)
        x(i)= x(i-1) + αip(i)
        r(i)= r(i-1) - αiq(i)
        check convergence |r|
      end
    
```

# CG Solver (4/6)

```

!C
!C +-----+
!C | {RHO}= {r} {z} |
!C +-----+
!C===
      RHO= 0. d0
      do i= 1, N
          RHO= RHO + WW(i, R)*WW(i, Z)
      enddo
!C===
!C +-----+
!C | {p} = {z} if     ITER=1
!C | BETA= RHO / RH01 otherwise |
!C +-----+
!C===
      if ( ITER.eq.1 ) then
          do i= 1, N
              WW(i, P)= WW(i, Z)
          enddo
      else
          BETA= RHO / RH01
          do i= 1, N
              WW(i, P)= WW(i, Z) + BETA*WW(i, P)
          enddo
      endif
!C===

```

Compute  $r^{(0)} = b - [A]x^{(0)}$

for  $i = 1, 2, \dots$

solve  $[M]z^{(i-1)} = r^{(i-1)}$

$\rho_{i-1} = r^{(i-1)} \cdot z^{(i-1)}$

if  $i=1$

$p^{(1)} = z^{(0)}$

else

$\beta_{i-1} = \rho_{i-1}/\rho_{i-2}$

$p^{(i)} = z^{(i-1)} + \beta_{i-1} p^{(i-1)}$

endif

$q^{(i)} = [A]p^{(i)}$

$\alpha_i = \rho_{i-1}/p^{(i)}q^{(i)}$

$x^{(i)} = x^{(i-1)} + \alpha_i p^{(i)}$

$r^{(i)} = r^{(i-1)} - \alpha_i q^{(i)}$

check convergence  $|r|$

end

# CG Solver (5/6)

```

!C +-----+
!C | {q} = [A] {p} |
!C +-----+
!C===
      do j= 1, N
        WVAL= D(j)*WW(j, P)
        do k= index(j-1)+1, index(j)
          i= item(k)
          WVAL= WVAL + AMAT(k)*WW(i, P)
        enddo
        WW(j, Q)= WVAL
      enddo
!C===

```

```

!C +-----+
!C | ALPHA= RHO / {p} {q} |
!C +-----+
!C===
      C1= 0. d0
      do i= 1, N
        C1= C1 + WW(i, P)*WW(i, Q)
      enddo
      ALPHA= RHO / C1
!C===

```

Compute  $r^{(0)} = b - [A]x^{(0)}$

for  $i = 1, 2, \dots$

solve  $[M]z^{(i-1)} = r^{(i-1)}$

$\rho_{i-1} = r^{(i-1)} \cdot z^{(i-1)}$

if  $i = 1$

$p^{(1)} = z^{(0)}$

else

$\beta_{i-1} = \rho_{i-1} / \rho_{i-2}$

$p^{(i)} = z^{(i-1)} + \beta_{i-1} p^{(i-1)}$

endif

$q^{(i)} = [A]p^{(i)}$

$\alpha_i = \rho_{i-1} / p^{(i)} q^{(i)}$

$x^{(i)} = x^{(i-1)} + \alpha_i p^{(i)}$

$r^{(i)} = r^{(i-1)} - \alpha_i q^{(i)}$

check convergence  $|r|$

end

# CG Solver (6/6)

```

!C
!C +-----+
!C | {x} = {x} + ALPHA*{p} |
!C | {r} = {r} - ALPHA*{q} |
!C +-----+
!C==

      do i= 1, N
        X(i) = X (i) + ALPHA * WW(i, P)
        WW(i, R)= WW(i, R) - ALPHA * WW(i, Q)
      enddo

!C==

      DNRM2= 0. d0
      do i= 1, N
        DNRM2= DNRM2 + WW(i, R)**2
      enddo

      RESID= dsqrt(DNRM2/BNRM2)

      if ( RESID.le.TOL ) exit
      if ( ITER .eq. MAXIT ) ERROR= -300

      RH01 = RHO
    enddo

!C==

```

Compute  $r^{(0)} = b - [A]x^{(0)}$

for  $i = 1, 2, \dots$

solve  $[M]z^{(i-1)} = r^{(i-1)}$

$\rho_{i-1} = r^{(i-1)} \cdot z^{(i-1)}$

if  $i = 1$

$p^{(1)} = z^{(0)}$

else

$\beta_{i-1} = \rho_{i-1}/\rho_{i-2}$

$p^{(i)} = z^{(i-1)} + \beta_{i-1} p^{(i-1)}$

endif

$q^{(i)} = [A]p^{(i)}$

$\alpha_i = \rho_{i-1}/p^{(i)}q^{(i)}$

$x^{(i)} = x^{(i-1)} + \alpha_i p^{(i)}$

$r^{(i)} = r^{(i-1)} - \alpha_i q^{(i)}$

check convergence  $|r|$

end

# CG Solver (6/6)

```

!C
!C +-----+
!C | {x} = {x} + ALPHA*{p} |
!C | {r} = {r} - ALPHA*{q} |
!C +-----+
!C===
      do i= 1, N
        X(i) = X (i) + ALPHA * WW(i,P)
        WW(i,R)= WW(i,R) - ALPHA * WW(i,Q)
      enddo
!C===
      DNRM2= 0. d0
      do i= 1, N
        DNRM2= DNRM2 + WW(i,R)**2
      enddo
      RESID= dsqrt(DNRM2/BNRM2)
      if ( RESID.le.TOL ) exit
      if ( ITER .eq. MAXIT ) ERROR= -300
      RH01 = RHO
    enddo
!C===

```

Compute  $r^{(0)} = b - [A]x^{(0)}$

for  $i = 1, 2, \dots$

solve  $[M]z^{(i-1)} = r^{(i-1)}$

$\rho_{i-1} = r^{(i-1)} \cdot z^{(i-1)}$

if  $i = 1$

$p^{(1)} = z^{(0)}$

else

$\beta_{i-1} = \rho_{i-1}/\rho_{i-2}$

$p^{(i)} = z^{(i-1)} + \beta_{i-1} p^{(i-1)}$

endif

$q^{(i)} = [A]p^{(i)}$

$\alpha_i = \rho_{i-1}/p^{(i)}q^{(i)}$

$x^{(i)} = x^{(i-1)} + \alpha_i p^{(i)}$

$r^{(i)} = r^{(i-1)} - \alpha_i q^{(i)}$

**check convergence  $|r|$**

end

$$\text{Resid} = \sqrt{\frac{\text{DNorm2}}{\text{BNorm2}}} = \frac{|r|}{|b|} = \frac{|b - Ax|}{|b|} \leq \text{Tol}$$